


2024/06/07 0646Z

RCTP PABSO **R583** BISIS ROAH

373.84 nm / 692.35 km

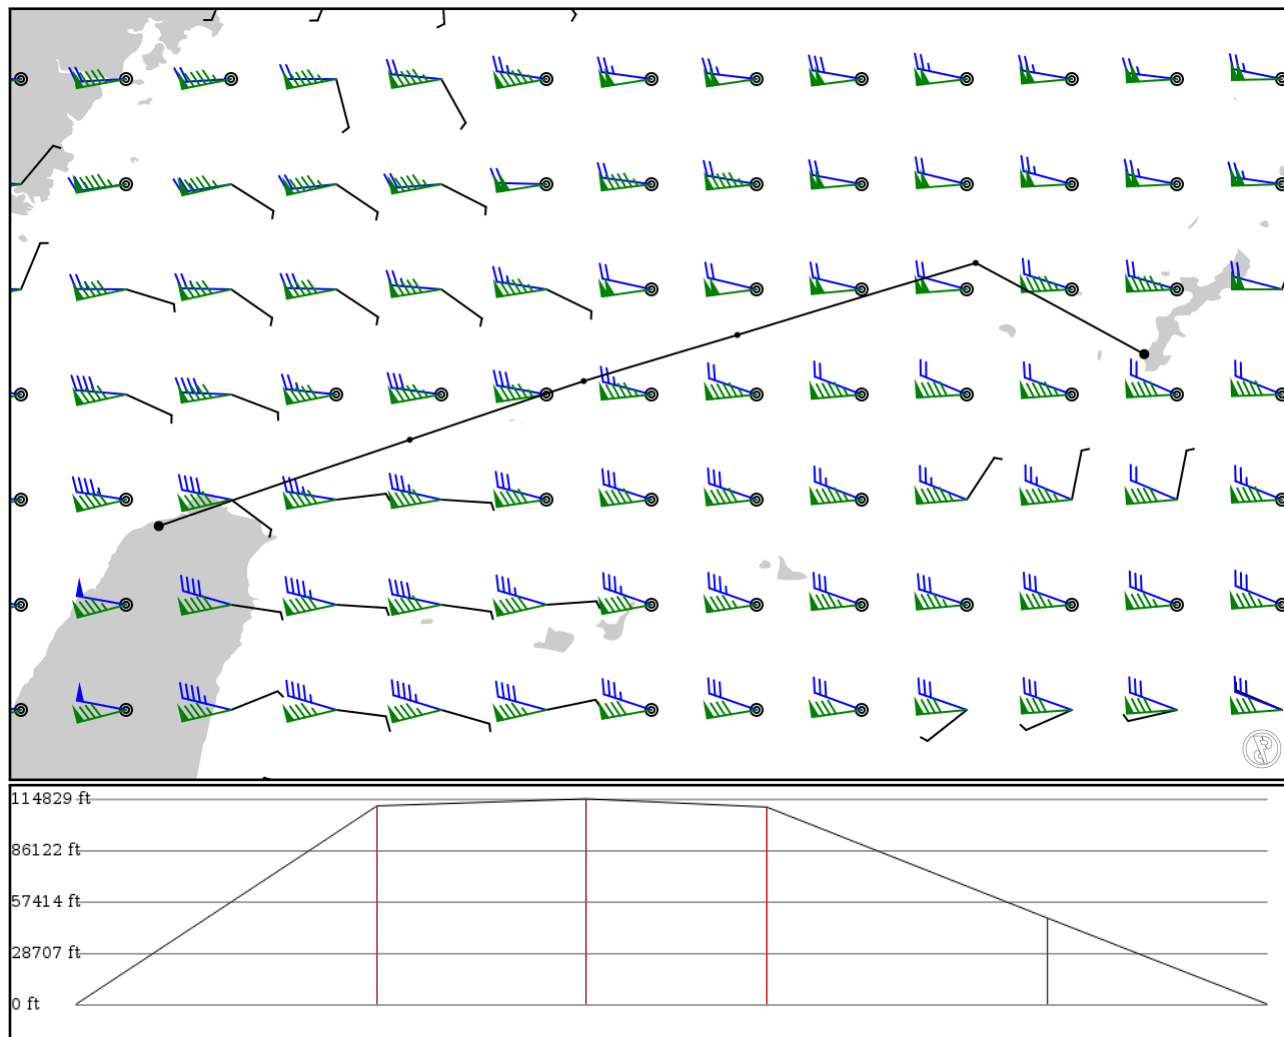

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 33000ft
- Cruise Speed: 420kts
- Descent Rate: 2000ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RCTP	-	25.07773	0 ft	-	Taiwan Taoyuan International
APT	-	121.23282	0 m		
PABSO	-	25.63911	33,800 ft	94	-
FIX	-	122.86603	10,302 m		
BORDO	R583	26.02067	35,000 ft	65	-
FIX	AWY-LO	123.99838	10,668 m		
ENTOK	R583	26.32065	33,600 ft	56	-
FIX	AWY-LO	124.99829	10,241 m		
BISIS	R583	26.78922	14,700 ft	87	-
FIX	AWY-LO	126.54925	4,481 m		
ROAH	-	26.19582	0 ft	68	NAHA
APT	-	127.64587	0 m		

RCTP

Region: REPUBLIC OF CHINA (TAIWAN)
Timezone: ASIA/TAIPEI
Runways: 2

Elevation: 108 ft / 33 m
Location: 25.077900 121.234000
Magnetic Var: 4.997 W

METAR

RCTP 070630Z 01006KT 320V040 9999 FEW007 BKN015 BKN020 28/25 Q1007 NOSIG RMK A2976

TAF

TAF RCTP 070500Z 0706/0812 03005KT 9999 SCT008 BKN012 TEMPO 0706/0712 01010KT SCT012 BKN032 TEMPO 0712/0718 FEW00

Frequencies

REC - 127.60 MHz - ATIS	TWR - 129.30 MHz - TAIPEI TOWER
TWR - 118.70 MHz - TAIPEI TOWER	GND - 121.70 MHz - TAIPEI GROUND
GND - 121.60 MHz - TAIPEI GROUND	CLD - 121.80 MHz - TAIPEI CLEARANCE DELIVERY
APP - 119.50 MHz - TAIPEI APPROACH	APP - 119.60 MHz - TAIPEI APPROACH
APP - 119.70 MHz - TAIPEI APPROACH	APP - 123.50 MHz - TAIPEI APPROACH
APP - 123.60 MHz - TAIPEI APPROACH	APP - 124.20 MHz - TAIPEI APPROACH
APP - 125.10 MHz - TAIPEI APPROACH	APP - 125.50 MHz - TAIPEI APPROACH
APP - 125.60 MHz - TAIPEI APPROACH	APP - 128.50 MHz - TAIPEI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05L	197 ft	12,020 ft	49.01	ASPHALT	0 ft	420 ft
	60 m	3,664 m	54.01		0 m	128 m
23R	197 ft	12,020 ft	229.02	ASPHALT	0 ft	390 ft
	60 m	3,664 m	234.02		0 m	119 m
05R	197 ft	12,478 ft	49.01	ASPHALT	328 ft	404 ft
	60 m	3,803 m	54.00		100 m	123 m
23L	197 ft	12,478 ft	229.02	ASPHALT	1,148 ft	394 ft
	60 m	3,803 m	234.02		350 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	DME	ITIA	111.10 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
05R	DME	ICKS	110.70 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
23R	DME	ITYA	109.30 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
23L	DME	ICJN	111.90 MHz	18 nm	-	-	106 ft
				33 km	-		106 m
05L	LOC-ILS	ITIA	111.10 MHz	18 nm	49.02	-	108 ft
				33 km	54.02		108 m
05R	LOC-ILS	ICKS	110.70 MHz	18 nm	49.02	-	108 ft
				33 km	54.02		108 m
23L	LOC-ILS	ICJN	111.90 MHz	18 nm	229.02	-	108 ft
				33 km	234.02		108 m
23R	LOC-ILS	ITYA	109.30 MHz	18 nm	229.02	-	108 ft
				33 km	234.02		108 m
05L	GS	ITIA	111.10 MHz	10 nm	49.02	3.00	108 ft
				19 km	54.02		108 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05R	GS	ICKS	110.70 MHz	10 nm	49.02	3.00	108 ft
				19 km	54.02		108 m
23L	GS	ICJN	111.90 MHz	10 nm	229.02	3.00	108 ft
				19 km	234.02		108 m
23R	GS	ITYA	109.30 MHz	10 nm	229.02	3.00	108 ft
				19 km	234.02		108 m

ROAH

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 11 ft / 3 m
Location: 26.193400 127.639000
Magnetic Var: 5.808 W

METAR

ROAH 070630Z 13011KT 9999 -RA FEW020 SCT070 BKN110 27/22 Q1010

TAF

TAF ROAH 070505Z 0706/0812 12010KT 9999 FEW015 SCT040 BECMG 0806/0809 18011KT

Frequencies

REC - 127.80 MHz - NAHA AIRPORT	TWR - 118.10 MHz - NAHA TOWER
TWR - 118.75 MHz - NAHA TOWER	TWR - 126.20 MHz - NAHA TOWER
GND - 121.80 MHz - NAHA GROUND	GND - 121.90 MHz - NAHA GROUND
CLD - 122.07 MHz - NAHA DELIVERY	APP - 119.10 MHz - NAHA APPROACH
APP - 126.50 MHz - NAHA APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18R	194 ft	8,892 ft	177.57	ASPHALT	0 ft	1,037 ft
	59 m	2,710 m	183.38		0 m	316 m
36L	194 ft	8,892 ft	357.57	ASPHALT	0 ft	1,040 ft
	59 m	2,710 m	3.38		0 m	317 m
18L	145 ft	10,027 ft	177.59	ASPHALT	141 ft	489 ft
	44 m	3,056 m	183.40		43 m	149 m
36R	145 ft	10,027 ft	357.59	ASPHALT	0 ft	495 ft
	44 m	3,056 m	3.40		0 m	151 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18R	LOC-ILS	ION	110.15 MHz	18 nm	177.57	-	11 ft
				33 km	183.38		11 m
36L	LOC-ILS	IOW	111.70 MHz	18 nm	357.57	-	11 ft
				33 km	3.38		11 m
36R	LOC-ILS	IOK	110.30 MHz	18 nm	357.59	-	11 ft
				33 km	3.40		11 m
18R	GS	ION	110.15 MHz	10 nm	177.57	3.00	11 ft
				19 km	183.38		11 m
36L	GS	IOW	111.70 MHz	10 nm	357.57	3.00	11 ft
				19 km	3.38		11 m
36R	GS	IOK	110.30 MHz	10 nm	357.59	3.00	11 ft
				19 km	3.40		11 m