


2024/05/01 0145Z

EHRD PEVAD EGSS

155.90 nm / 288.72 km

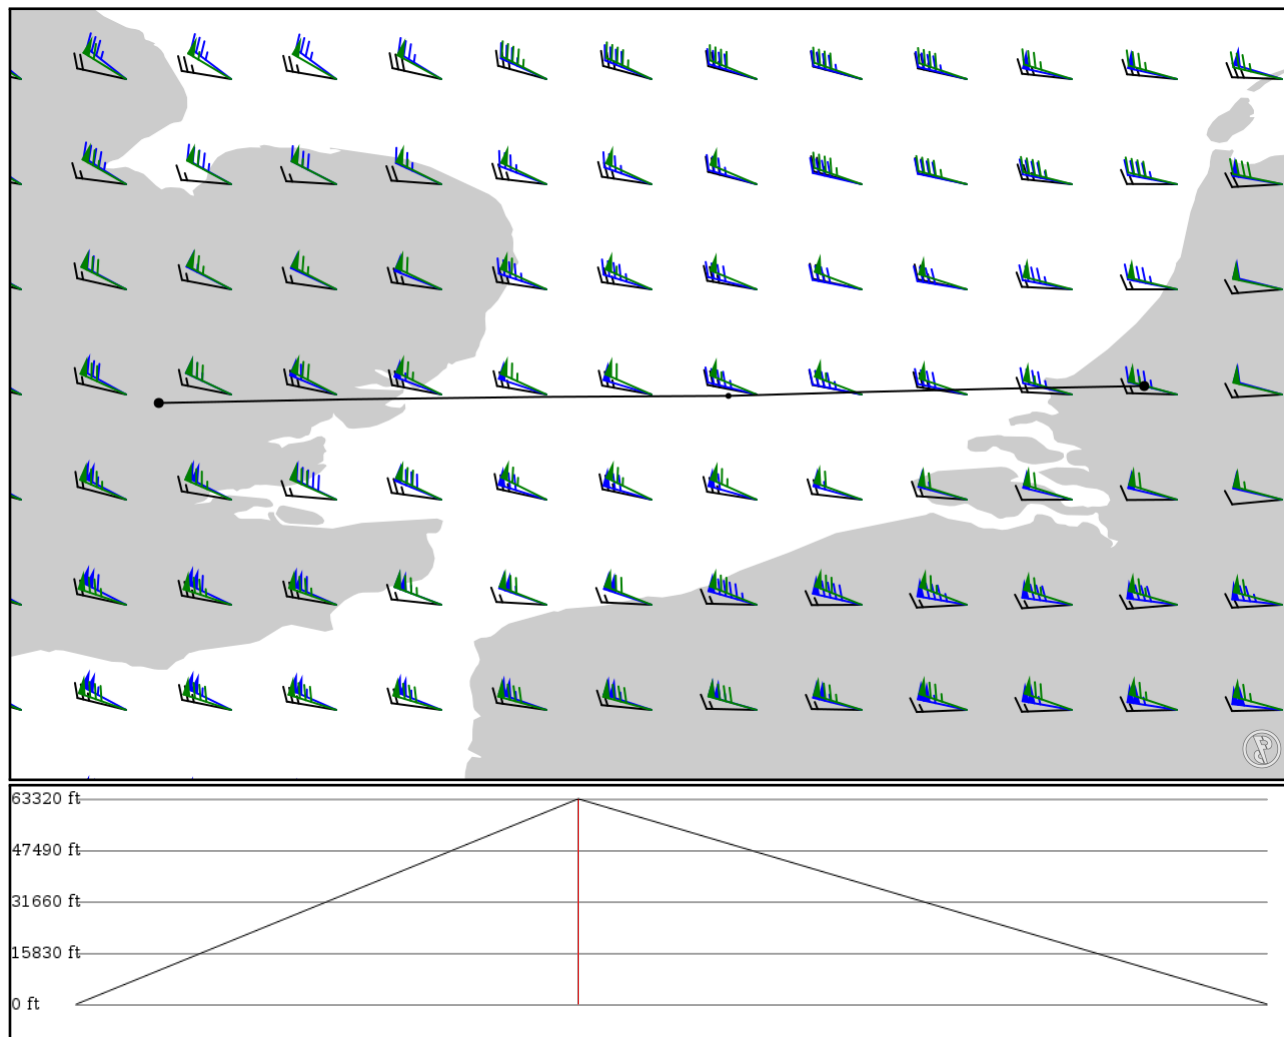

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EHRD	-	51.95750	0 ft	-	Rotterdam The Hague
APT	-	4.44169	0 m		
PEVAD	-	51.91540	19,300 ft	65	-
FIX	-	2.66691	5,883 m		
EGSS	-	51.88510	0 ft	90	Stansted
APT	-	0.23499	0 m		

EHRD

Region: NETHERLANDS
Timezone: EUROPE/AMSTERDAM
Runways: 1

Elevation: -15 ft / -5 m
Location: 51.957500 4.441690
Magnetic Var: 1.948 E

METAR

EHRD 010125Z AUTO 23007KT 210V280 9999 FEW015CB 15/13 Q1011 NOSIG

TAF

TAF EHRD 302301Z 0100/0206 VRB02KT CAVOK PROB30 TEMPO 0100/0104 28010KT 6000 SHRA SCT050CB BECMG 0101/0104 35007K

Frequencies

TWR - 118.20 MHz - ROTTERDAM TOWER
REC - 110.40 MHz - ROTTERDAM ATIS
GND - 122.17 MHz - ROTTERDAM GROUND

APP - 127.02 MHz - ROTTERDAM APPROACH
CLD - 128.80 MHz - ROTTERDAM DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	7,198 ft	57.03	ASPHALT	643 ft	0 ft
	45 m	2,194 m	55.08		196 m	0 m
24	148 ft	7,198 ft	237.05	ASPHALT	646 ft	0 ft
	45 m	2,194 m	235.10		197 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	ROS	110.90 MHz	18 nm	-	-	-15 ft
				33 km	-		-15 m
24	DME	RSV	110.90 MHz	18 nm	-	-	-15 ft
				33 km	-		-15 m
06	LOC-ILS	ROS	109.10 MHz	18 nm	56.94	-	-15 ft
				33 km	55.00		-15 m
24	LOC-ILS	RSV	110.90 MHz	18 nm	236.94	-	-15 ft
				33 km	235.00		-15 m

EGSS

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 348 ft / 106 m
Location: 51.885100 0.234989
Magnetic Var: 0.574 E

METAR

EGSS 010120Z AUTO 10005KT 3200 BR NCD 11/11 Q1009

TAF

TAF AMD EGSS 010010Z 0100/0206 11005KT 9999 FEW025 BECMG 0100/0104 6000 BKN002 PROB40 0100/0108 0300 FG OVC000 BECMG 0200/0206 11005KT 3200 BR NCD 11/11 Q1009

Frequencies

DEP - 120.62 MHz - ESSEX RADAR	APP - 120.62 MHz - ESSEX RADAR
APP - 132.05 MHz - STANSTED APPROACH	CLD - 121.95 MHz - STANSTED CLEARANCE DELIVERY
GND - 121.72 MHz - STANSTED GROUND	TWR - 123.80 MHz - STANSTED TOWER
TWR - 125.55 MHz - STANSTED TOWER	APP - 136.20 MHz - STANSTED DIRECT
REC - 114.55 MHz - ATIS	REC - 127.17 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	9,984 ft	42.78	ASPHALT	974 ft	0 ft
	46 m	3,043 m	42.21		297 m	0 m
22	151 ft	9,984 ft	222.81	ASPHALT	0 ft	0 ft
	46 m	3,043 m	222.23		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	ISED	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
22	DME	ISX	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
04	LOC-ILS	ISED	110.50 MHz	18 nm	42.80	-	348 ft
				33 km	42.23		348 m
22	LOC-ILS	ISX	110.50 MHz	18 nm	222.80	-	348 ft
				33 km	222.23		348 m
04	GS	ISED	110.50 MHz	10 nm	42.80	3.00	348 ft
				19 km	42.23		348 m
22	GS	ISX	110.50 MHz	10 nm	222.80	3.00	348 ft
				19 km	222.23		348 m