

SAWO

USHUAIA EST AERONAVAL


SCEL

Arturo Merino Benitez Intl

2024/05/01 0443Z

SAWO LOKEN **UW63** MUBES **UW42** GAL **UT658** ESQ **UW44** MLG **UB684** ANKON SIROV SCEL

1339.29 nm / 2480.37 km

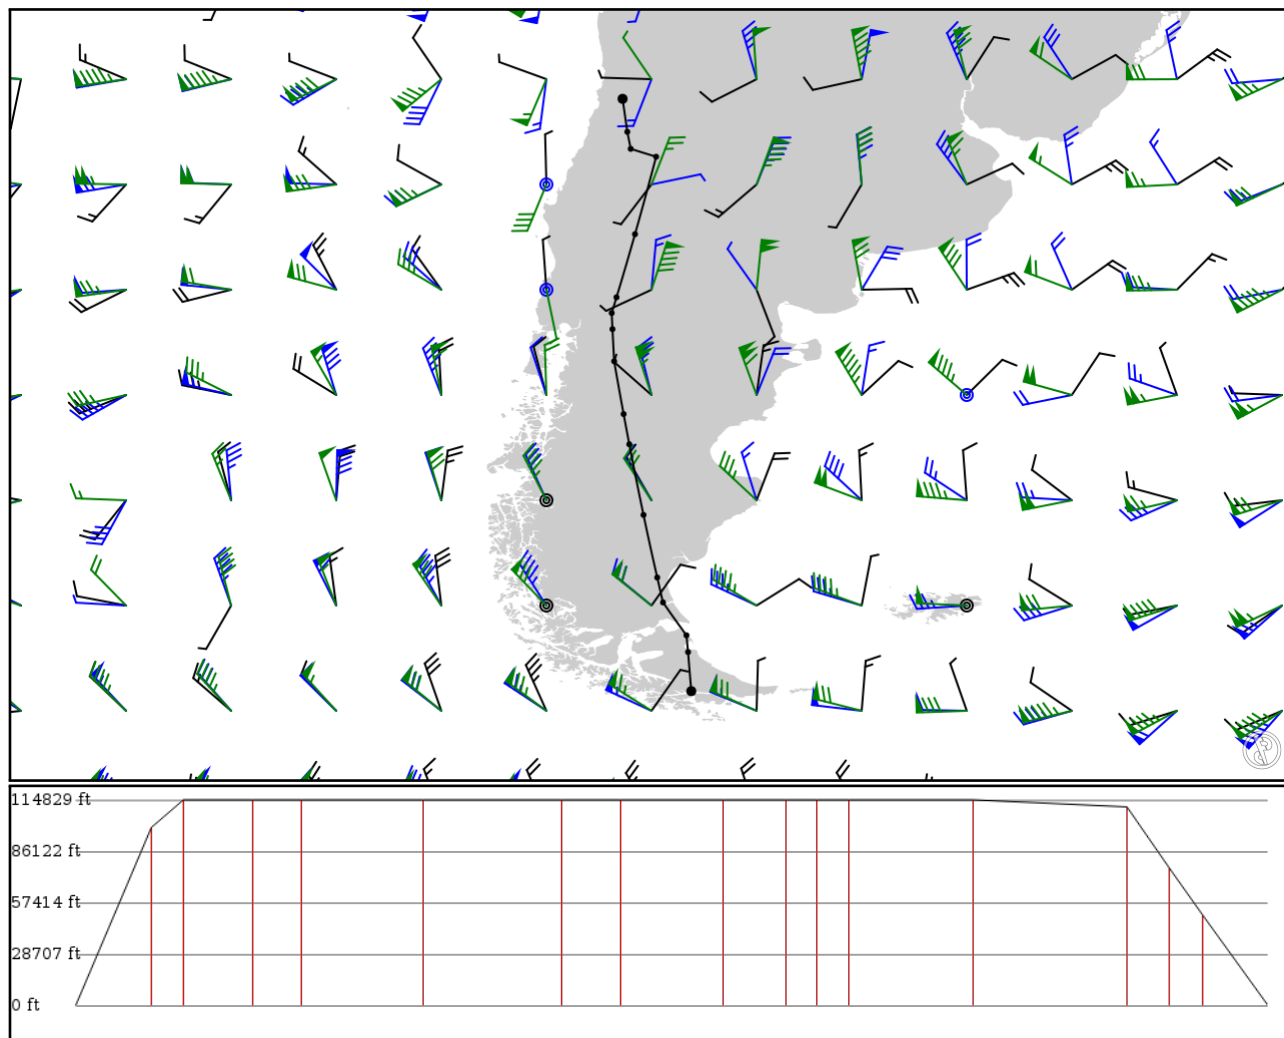

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
SAWO	-	-54.82270	0 ft	-	USHUAIA EST AERONAVAL
APT	-	-68.30430	0 m		
LOKEN	-	-53.40830	30,300 ft	85	-
FIX	-	-68.42140	9,235 m		
MUBES	UW63	-52.80250	35,000 ft	36	-
FIX	AWY-HI	-68.47920	10,668 m		
GAL	UW42	-51.61100	35,000 ft	78	RIO GALLEGOS
VOR	AWY-HI	-69.33020	10,668 m		
ORABO	UT658	-50.71060	35,000 ft	54	-
FIX	AWY-HI	-69.53830	10,668 m		
BOKUK	UT658	-48.44640	35,000 ft	137	-
FIX	AWY-HI	-70.03610	10,668 m		
MIKIM	UT658	-45.88970	35,000 ft	154	-
FIX	AWY-HI	-70.55080	10,668 m		
DAKAX	UT658	-44.79690	35,000 ft	66	-
FIX	AWY-HI	-70.75690	10,668 m		
ESQ	UT658	-42.88720	35,000 ft	115	ESQUEL
VOR	AWY-HI	-71.10030	10,668 m		
TORES	UW44	-41.72330	35,000 ft	69	-
FIX	AWY-HI	-71.16110	10,668 m		
BAR	UW44	-41.14030	35,000 ft	35	SAN CARLOS DE BARILOCHE
VOR	AWY-HI	-71.18900	10,668 m		
CHATO	UW44	-40.57190	35,000 ft	35	-
FIX	AWY-HI	-71.01470	10,668 m		
MOCHO	UW44	-38.28780	35,000 ft	140	-
FIX	AWY-HI	-70.34440	10,668 m		
MLG	UW44	-35.48610	33,800 ft	172	MALARGUE
VOR	AWY-HI	-69.57860	10,302 m		
ANKON	UB684	-35.20000	23,400 ft	48	-
FIX	AWY-HI	-70.50000	7,132 m		
SIROV	-	-34.58470	15,400 ft	37	-
FIX	-	-70.62280	4,694 m		
SCEL	-	-33.39100	0 ft	72	Arturo Merino Benitez Intl
APT	-	-70.79430	0 m		

SCEL

Region: CHILE
Timezone: AMERICA/SANTIAGO
Runways: 2

Elevation: 1,555 ft / 474 m
Location: -33.391000 -70.794300
Magnetic Var: 0.789 E

METAR

SCEL 010400Z 16006KT 9999 BKN040 BKN160 13/09 Q1017 NOSIG

TAF

TAF SCEL 302200Z 0100/0124 21010KT 9999 FEW050 SCT160 TX17/0118Z TN09/0109Z BECMG 0102/0104 15004KT TEMPO 0108/0110 15004KT

Frequencies

REC - 132.70 MHz - ATIS
TWR - 118.35 MHz - SANTIAGO TOWER
CLD - 121.70 MHz - CLEARANCE DELIVERY
APP - 129.70 MHz - SANTIAGO APPROACH
TWR - 118.10 MHz - SANTIAGO TOWER
GND - 122.20 MHz - SANTIAGO GROUND
APP - 119.70 MHz - SANTIAGO APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17R	148 ft	12,479 ft	177.47	ASPHALT	0 ft	0 ft
	45 m	3,804 m	176.68		0 m	0 m
35L	148 ft	12,479 ft	357.47	ASPHALT	0 ft	0 ft
	45 m	3,804 m	356.68		0 m	0 m
17L	180 ft	12,315 ft	177.42	ASPHALT	0 ft	0 ft
	55 m	3,754 m	176.64		0 m	0 m
35R	180 ft	12,315 ft	357.42	ASPHALT	1,785 ft	0 ft
	55 m	3,754 m	356.63		544 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	IUEL	110.30 MHz	18 nm	-	-	1,557 ft
				33 km	-		1,557 m
17R	DME	IMER	111.10 MHz	18 nm	-	-	1,555 ft
				33 km	-		1,555 m
17L	LOC-ILS	IUEL	110.30 MHz	18 nm	177.42	-	1,555 ft
				33 km	176.63		1,555 m
17R	LOC-ILS	IMER	111.10 MHz	18 nm	177.47	-	1,555 ft
				33 km	176.68		1,555 m
17L	GS	IUEL	110.30 MHz	10 nm	177.42	3.00	1,555 ft
				19 km	176.63		1,555 m
17R	GS	IMER	111.10 MHz	10 nm	177.47	3.00	1,555 ft
				19 km	176.68		1,555 m