


2024/05/07 0447Z

MMZP TNY **UJ12** MZT **UJ3** LMM **UT4** TIJ KONT

1113.33 nm / 2061.89 km

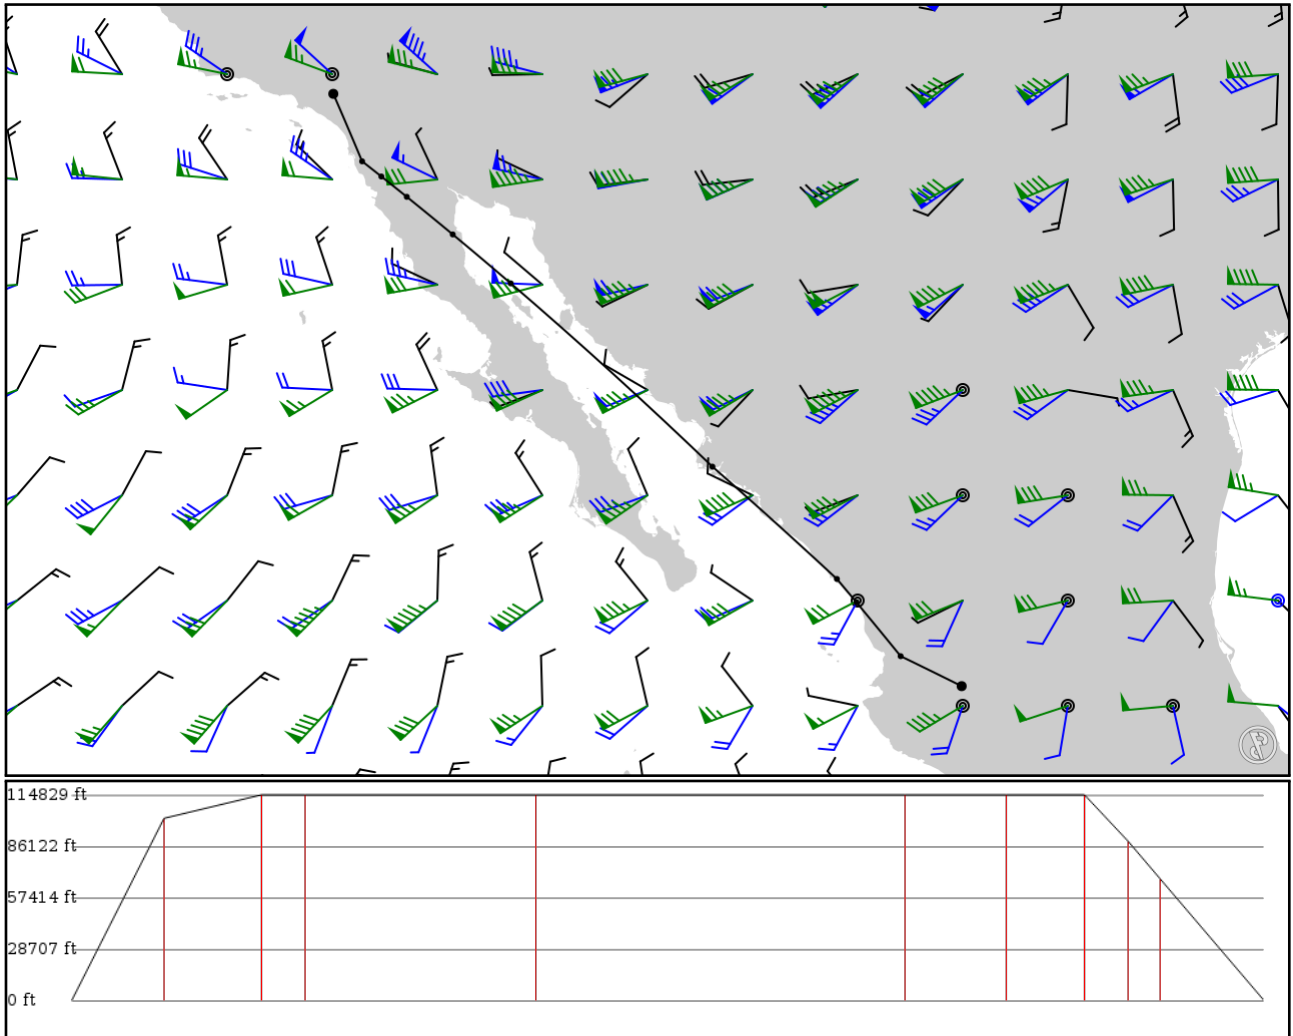

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
MMZP	-	20.75330	0 ft	-	Zapopan Afb
APT	-	-103.46400	0 m		
TNY	-	21.42650	31,000 ft	86	TEPIC
VOR	-	-104.83700	9,449 m		
ALILI	UJ12	22.63250	35,000 ft	91	-
FIX	AWY-HI	-105.82900	10,668 m		
MZT	UJ12	23.16050	35,000 ft	40	MAZATLAN
VOR	AWY-HI	-106.27100	10,668 m		
LMM	UJ3	25.68260	35,000 ft	215	MOCHIS (LOS MOCHIS)
VOR	AWY-HI	-109.07200	10,668 m		
ANTEL	UT4	29.79920	35,000 ft	345	-
FIX	AWY-HI	-113.60900	10,668 m		
SANFE	UT4	30.89830	35,000 ft	94	-
FIX	AWY-HI	-114.91400	10,668 m		
TUMAP	UT4	31.74280	35,000 ft	73	-
FIX	AWY-HI	-115.94800	10,668 m		
OASIS	UT4	32.19930	27,100 ft	40	-
FIX	AWY-HI	-116.52000	8,260 m		
TIJ	UT4	32.54040	20,700 ft	30	TIJUANA
VOR	AWY-HI	-116.95300	6,309 m		
KONT	-	34.05590	0 ft	96	Ontario Intl
APT	-	-117.60100	0 m		

## KONT

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 2

Elevation: 944 ft / 288 m  
Location: 34.055900 -117.601000  
Magnetic Var: 11.294 E

## METAR

KONT 070353Z 25007KT 10SM CLR 17/02 A2996 RMK A02 SLP141 T01670022

## TAF

TAF KONT 062338Z 0700/0806 26012KT P6SM SKC FM070500 VRB04KT P6SM SKC FM072000 26012G20KT P6SM SKC

## Frequencies

REC - 124.25 MHz - ONTARIO ATIS	CLD - 118.10 MHz - ONTARIO CLEARANCE
GND - 121.90 MHz - ONTARIO GROUND	TWR - 120.60 MHz - ONTARIO TOWER
APP - 127.00 MHz - SOCAL APPROACH	DEP - 127.00 MHz - SOCAL DEPARTURE
DEP - 119.65 MHz - SOCAL DEPARTURE	DEP - 134.00 MHz - SOCAL DEPARTURE
DEP - 135.40 MHz - SOCAL DEPARTURE	DEP - 125.50 MHz - SOCAL DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	151 ft	12,176 ft	89.96	CONCRETE	997 ft	397 ft
	46 m	3,711 m	78.67		304 m	121 m
26R	151 ft	12,176 ft	269.98	CONCRETE	0 ft	400 ft
	46 m	3,711 m	258.69		0 m	122 m
08R	151 ft	10,178 ft	89.96	CONCRETE	0 ft	400 ft
	46 m	3,102 m	78.67		0 m	122 m
26L	151 ft	10,178 ft	269.98	CONCRETE	0 ft	397 ft
	46 m	3,102 m	258.69		0 m	121 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	DME	ITWO	111.35 MHz	18 nm	-	-	944 ft
				33 km	-		944 m
26R	DME	IONT	109.70 MHz	18 nm	-	-	944 ft
				33 km	-		944 m
08L	LOC-ILS	IAOD	109.70 MHz	18 nm	89.97	-	944 ft
				33 km	78.68		944 m
26L	LOC-ILS	ITWO	111.35 MHz	18 nm	269.97	-	944 ft
				33 km	258.68		944 m
26R	LOC-ILS	IONT	109.70 MHz	18 nm	269.97	-	944 ft
				33 km	258.68		944 m
08L	GS	IAOD	109.70 MHz	10 nm	89.97	3.00	944 ft
				19 km	78.68		944 m
26L	GS	ITWO	111.35 MHz	10 nm	269.97	3.00	944 ft
				19 km	258.68		944 m
26R	GS	IONT	109.70 MHz	10 nm	269.97	3.00	944 ft
				19 km	258.68		944 m