


2024/05/11 0452Z

EGSS SOMVA **UP155** ANDIK **R12** DHE **P999** ALS EKCH

505.17 nm / 935.57 km

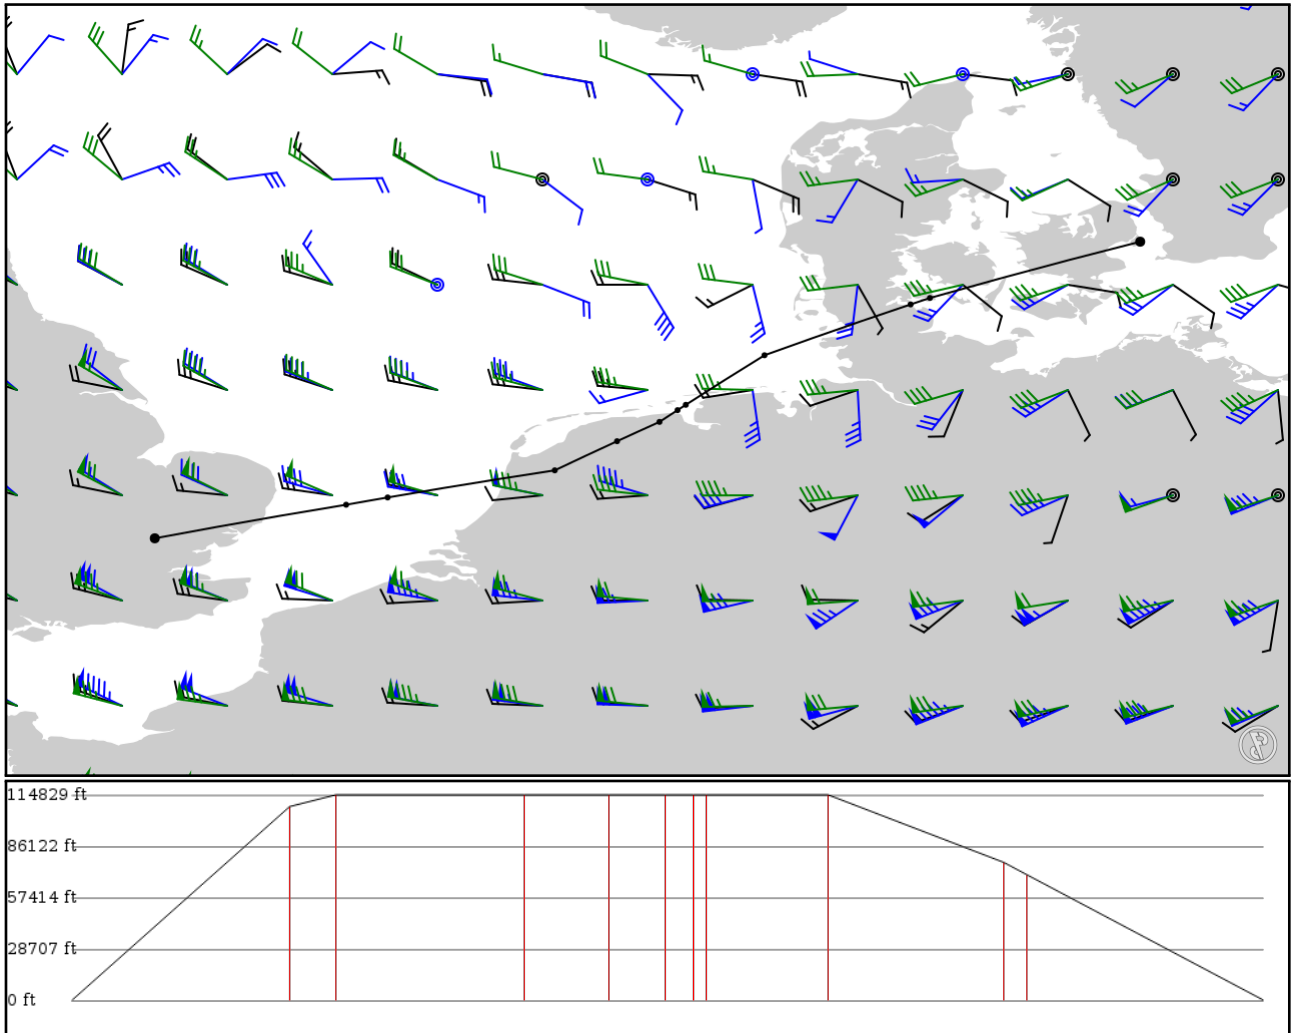

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EGSS	-	51.88510	0 ft	-	London Stansted
APT	-	0.23496	0 m		
SOMVA	-	52.30722	33,000 ft	92	-
FIX	-	2.64401	10,058 m		
MAVAS	UP155	52.39858	35,000 ft	19	-
FIX	AWY-HI	3.16675	10,668 m		
ANDIK	UP155	52.73940	35,000 ft	79	-
FIX	AWY-HI	5.27049	10,668 m		
GRONY	R12	53.10547	35,000 ft	35	-
FIX	AWY-LO	6.05497	10,668 m		
BEDUM	R12	53.34817	35,000 ft	24	-
FIX	AWY-LO	6.58887	10,668 m		
LABIL	R12	53.49583	35,000 ft	12	-
FIX	AWY-LO	6.81648	10,668 m		
JUIST	R12	53.56278	35,000 ft	5	-
FIX	AWY-LO	6.92000	10,668 m		
DHE	R12	54.18569	35,000 ft	51	HELGOLAND VOR-DME
VOR	AWY-LO	7.91070	10,668 m		
AMRAK	P999	54.82444	23,500 ft	74	-
FIX	AWY-LO	9.75056	7,163 m		
ALS	P999	54.90541	21,400 ft	9	ALSIE VOR
VOR	AWY-LO	9.99338	6,523 m		
EKCH	-	55.61291	0 ft	100	Kastrup
APT	-	12.64096	0 m		

EGSS

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 348 ft / 106 m
Location: 51.885100 0.234989
Magnetic Var: 0.578 E

METAR

EGSS 110420Z AUTO 05004KT 3700 BR NCD 08/07 Q1022

TAF

TAF AMD EGSS 110113Z 1101/1206 12007KT CAVOK TEMPO 1101/1110 7000 PROB40 TEMPO 1101/1107 3000 BR BKN003 PROB30 110

Frequencies

DEP - 120.62 MHz - ESSEX RADAR	APP - 120.62 MHz - ESSEX RADAR
APP - 132.05 MHz - STANSTED APPROACH	CLD - 121.95 MHz - STANSTED CLEARANCE DELIVERY
GND - 121.72 MHz - STANSTED GROUND	TWR - 123.80 MHz - STANSTED TOWER
TWR - 125.55 MHz - STANSTED TOWER	APP - 136.20 MHz - STANSTED DIRECT
REC - 114.55 MHz - ATIS	REC - 127.17 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	9,984 ft	42.78	ASPHALT	974 ft	0 ft
	46 m	3,043 m	42.21		297 m	0 m
22	151 ft	9,984 ft	222.81	ASPHALT	0 ft	0 ft
	46 m	3,043 m	222.23		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	ISED	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
22	DME	ISX	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
04	LOC-ILS	ISED	110.50 MHz	18 nm	42.80	-	348 ft
				33 km	42.22		348 m
22	LOC-ILS	ISX	110.50 MHz	18 nm	222.80	-	348 ft
				33 km	222.22		348 m
04	GS	ISED	110.50 MHz	10 nm	42.80	3.00	348 ft
				19 km	42.22		348 m
22	GS	ISX	110.50 MHz	10 nm	222.80	3.00	348 ft
				19 km	222.22		348 m

EKCH

Region: DENMARK / FAROE ISLANDS
Timezone: EUROPE/COPENHAGEN
Runways: 3

Elevation: 17 ft / 5 m
Location: 55.617900 12.656000
Magnetic Var: 4.671 E

METAR

EKCH 110420Z AUTO 35008KT 310V050 9999 FEW180/// 10/08 Q1024 NOSIG

TAF

TAF AMD TAF AMD EKCH 110208Z 1100/1124 VRB02KT CAVOK TEMPO 1102/1104 0150 BCFG TEMPO 1112/1118 FEW025TCU BECMG 1118

Frequencies

REC - 122.75 MHz - KASTRUP ARRIVAL INFORMATION	REC - 122.85 MHz - KASTRUP DEPARTURE INFORMATION
CLD - 119.90 MHz - CLEARANCE DELIVERY	GND - 121.62 MHz - APRON
GND - 121.72 MHz - APRON	GND - 121.90 MHz - APRON
TWR - 118.10 MHz - TOWER (ARRIVAL)	TWR - 118.57 MHz - TOWER
TWR - 118.70 MHz - TOWER (VFR)	TWR - 119.35 MHz - TOWER (DEPARTURE)
APP - 120.20 MHz - FINAL	APP - 119.80 MHz - COPENHAGEN APPROACH
DEP - 120.25 MHz - DEPARTURE	DEP - 124.95 MHz - DEPARTURE
APP - 118.45 MHz - ARRIVAL	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	148 ft	11,695 ft	41.13	ASPHALT	0 ft	0 ft
	45 m	3,565 m	36.46		0 m	0 m
22R	148 ft	11,695 ft	221.16	ASPHALT	1,870 ft	0 ft
	45 m	3,565 m	216.49		570 m	0 m
04R	148 ft	10,814 ft	41.14	ASPHALT	0 ft	0 ft
	45 m	3,296 m	36.47		0 m	0 m
22L	148 ft	10,814 ft	221.17	ASPHALT	0 ft	0 ft
	45 m	3,296 m	216.50		0 m	0 m
12	148 ft	10,046 ft	123.21	ASPHALT	2,306 ft	0 ft
	45 m	3,062 m	118.54		703 m	0 m
30	148 ft	10,046 ft	303.24	ASPHALT	886 ft	0 ft
	45 m	3,062 m	298.57		270 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	CH	110.50 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
12	DME	KA	109.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
22L	DME	OXS	109.50 MHz	18 nm	-	-	7 ft
				33 km	-		7 m
22R	DME	KLK	110.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
30	DME	OY	108.90 MHz	18 nm	-	-	9 ft
				33 km	-		9 m
04L	LOC-ILS	CH	110.50 MHz	18 nm	41.16	-	17 ft
				33 km	36.49		17 m
04R	LOC-ILS	NE	109.30 MHz	18 nm	41.18	-	17 ft
				33 km	36.50		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	LOC-ILS	KA	109.90 MHz	18 nm	123.25	-	17 ft
				33 km	118.57		17 m
22L	LOC-ILS	OXS	109.50 MHz	18 nm	221.14	-	17 ft
				33 km	216.47		17 m
22R	LOC-ILS	KLK	110.90 MHz	18 nm	221.14	-	17 ft
				33 km	216.47		17 m
30	LOC-ILS	OY	108.90 MHz	18 nm	303.23	-	17 ft
				33 km	298.56		17 m
04L	GS	CH	110.50 MHz	10 nm	41.32	3.00	17 ft
				19 km	36.65		17 m
04R	GS	NE	109.30 MHz	10 nm	41.32	3.00	17 ft
				19 km	36.65		17 m
12	GS	KA	109.90 MHz	10 nm	123.46	3.00	17 ft
				19 km	118.79		17 m
22L	GS	OXS	109.50 MHz	10 nm	221.32	3.00	17 ft
				19 km	216.65		17 m
22R	GS	KLK	110.90 MHz	10 nm	221.32	3.00	17 ft
				19 km	216.65		17 m
30	GS	OY	108.90 MHz	10 nm	303.46	3.00	17 ft
				19 km	298.79		17 m