


2024/06/15 1402Z

KARR IRITE KSUE

190.14 nm / 352.14 km

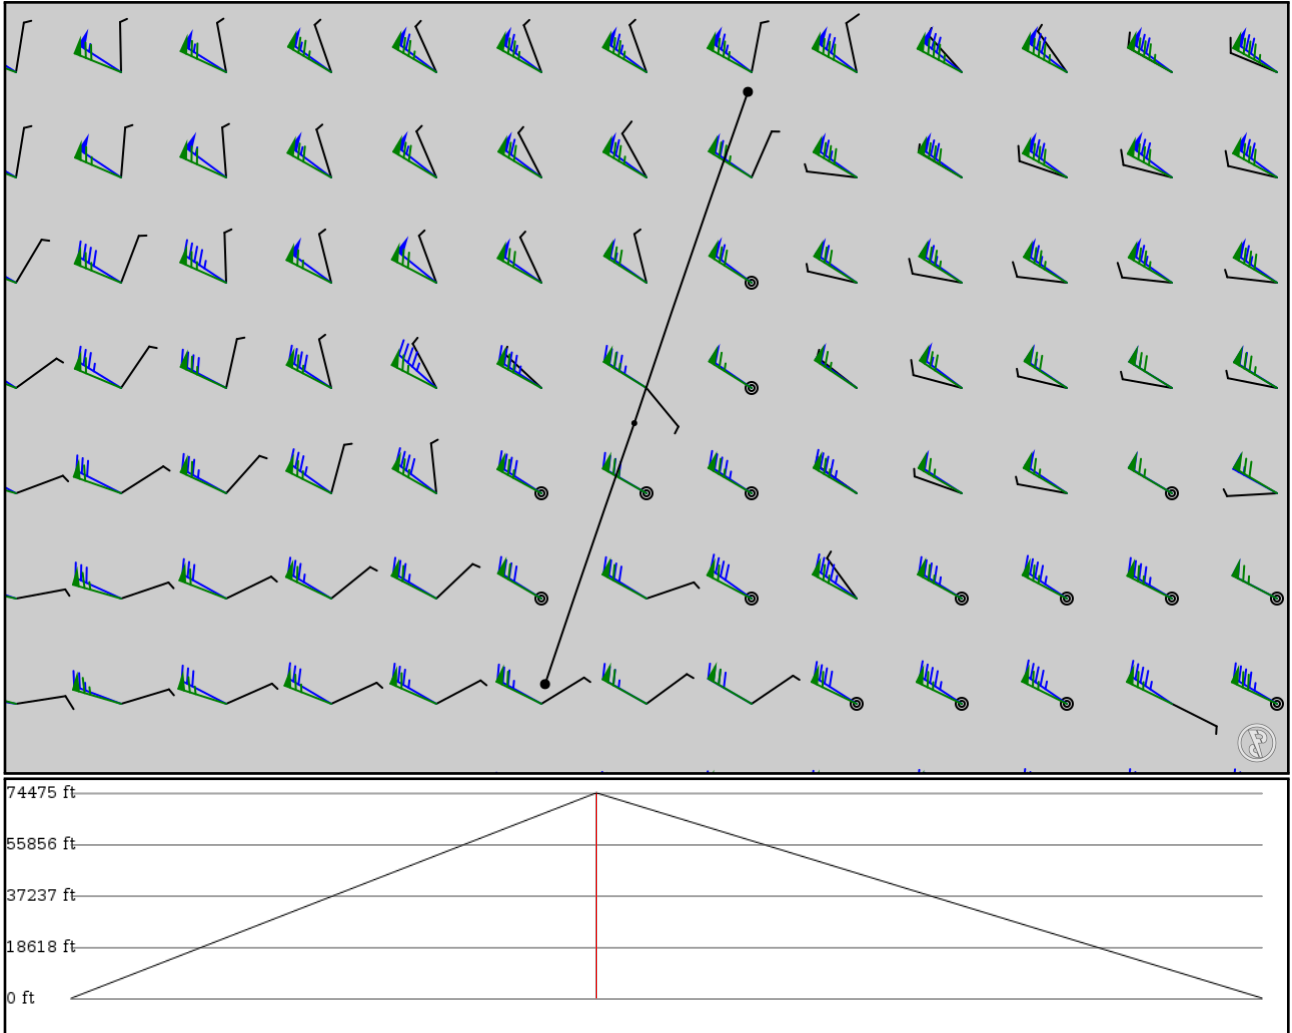

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KARR APT	-	41.77210 -88.47520	0 ft 0 m	-	AURORA MUNI
IRITE FIX	-	43.12560 -88.01150	22,700 ft 6,919 m	83	-
KSUE APT	-	44.84380 -87.42130	0 ft 0 m	106	DOOR CO CHERRYLAND

KARR

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 710 ft / 216 m
Location: 41.772100 -88.475200
Magnetic Var: 3.663 W

METAR

KARR 151252Z 05004KT 10SM CLR 18/12 A3012 RMK A02 SLP196 T01780122

TAF

UNKNOWN

Frequencies

REC - 125.85 MHz - ATIS
COM - 122.95 MHz - UNICOM
TWR - 120.60 MHz -
COM - 120.60 MHz - CTAF
GND - 121.70 MHz -
APP - 133.50 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	100 ft	6,487 ft	89.10	CONCRETE	171 ft	0 ft
	30 m	1,977 m	92.76		52 m	0 m
27	100 ft	6,487 ft	269.12	CONCRETE	171 ft	499 ft
	30 m	1,977 m	272.78		52 m	152 m
15	98 ft	5,512 ft	146.73	CONCRETE	154 ft	0 ft
	30 m	1,680 m	150.39		47 m	0 m
33	98 ft	5,512 ft	326.73	CONCRETE	151 ft	0 ft
	30 m	1,680 m	330.40		46 m	0 m
18	75 ft	3,199 ft	179.95	ASPHALT	102 ft	0 ft
	23 m	975 m	183.61		31 m	0 m
36	75 ft	3,199 ft	359.95	ASPHALT	98 ft	0 ft
	23 m	975 m	3.61		30 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09	LOC-ILS	IARR	108.90 MHz	18 nm	89.15	-	706 ft
				33 km	92.82		706 m
33	LOC-ILS	IROF	111.15 MHz	18 nm	328.95	-	706 ft
				33 km	332.61		706 m
09	GS	IARR	108.90 MHz	10 nm	89.29	3.00	698 ft
				19 km	92.95		698 m
27	GS	IROF	111.15 MHz	10 nm	269.29	3.00	712 ft
				19 km	272.95		712 m