

KANE

ANOKA CO BLAINE (Janes Field)


KLMS

LOUISVILLE WINSTON CO

2024/06/06 2220Z

KANE RST **V503** CID **V67** BRL **V580** STL **J151** FAM **J35** MEM WSTON KLMS

754.88 nm / 1398.03 km

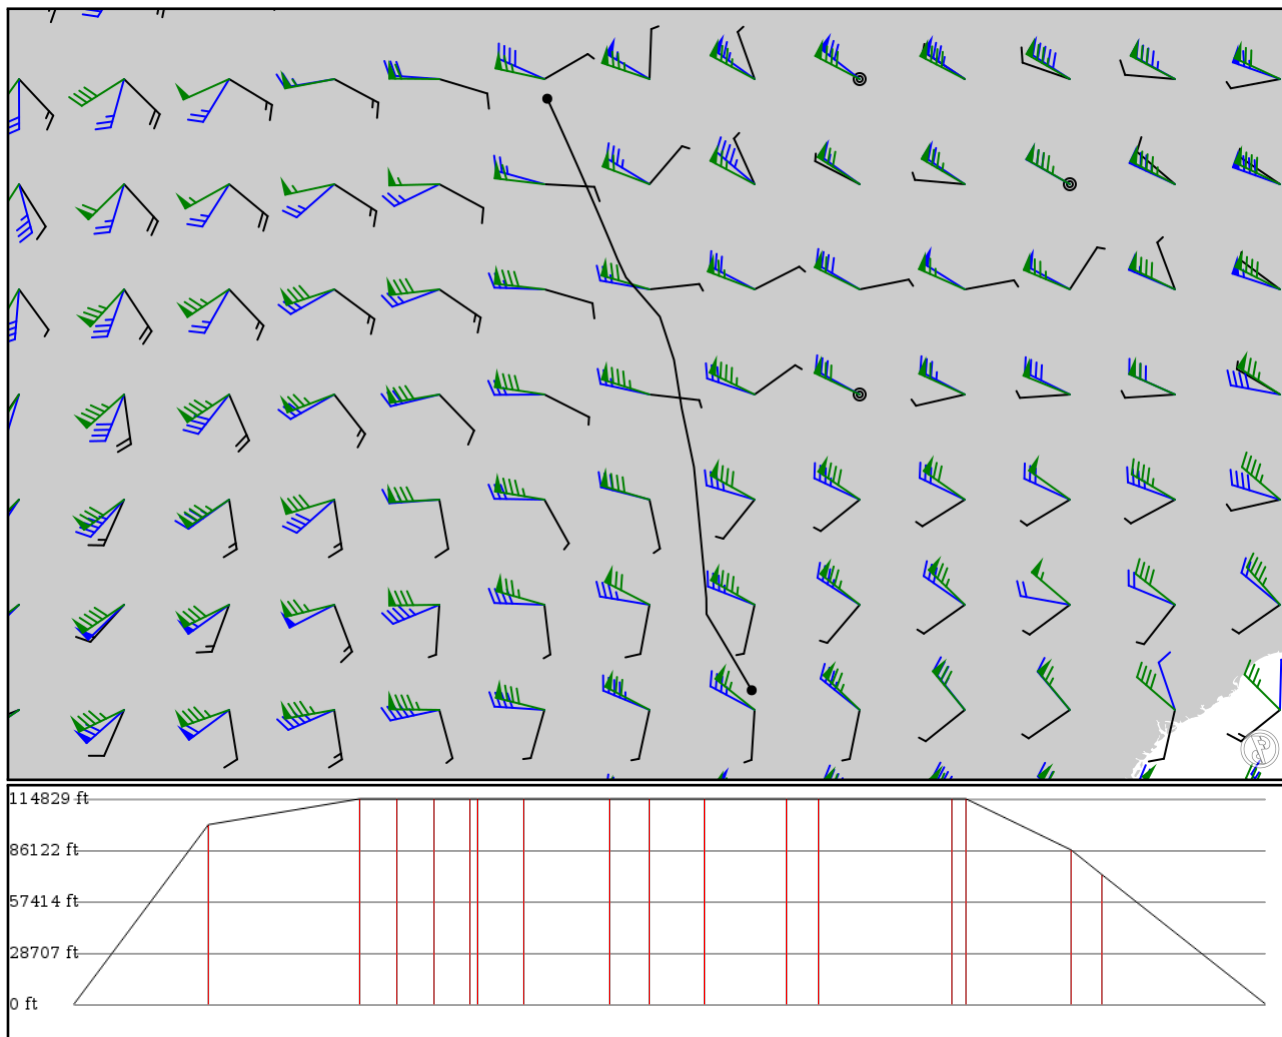

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KANE APT	-	45.14490 -93.21120	0 ft 0 m	-	ANOKA CO BLAINE (Janes Field)
RST VOR	-	43.78290 -92.59700	30,600 ft 9,327 m	85	ROCHESTER
FARVI FIX	V503 AWY-LO	42.26970 -91.94520	35,000 ft 10,668 m	95	-
CID VOR	V503 AWY-LO	41.88750 -91.78570	35,000 ft 10,668 m	24	CEDAR RAPIDS
IOW VOR	V67 AWY-LO	41.51900 -91.61330	35,000 ft 10,668 m	23	IOWA CITY
WAPEL FIX	V67 AWY-LO	41.20330 -91.33810	35,000 ft 10,668 m	22	-
UTXIH FIX	V67 AWY-LO	41.14260 -91.28550	35,000 ft 10,668 m	4	-
BRL VOR	V67 AWY-LO	40.72350 -90.92590	35,000 ft 10,668 m	29	BURLINGTON
SEXTN FIX	V580 AWY-LO	39.84730 -90.63950	35,000 ft 10,668 m	54	-
LEBOY FIX	V580 AWY-LO	39.43340 -90.57300	35,000 ft 10,668 m	25	-
STL VOR	V580 AWY-LO	38.86070 -90.48240	35,000 ft 10,668 m	34	SAINT LOUIS
SLVER FIX	J151 AWY-HI	38.00280 -90.30210	35,000 ft 10,668 m	52	-
FAM VOR	J151 AWY-HI	37.67350 -90.23410	35,000 ft 10,668 m	20	FARMINGTON
RUSLR FIX	J35 AWY-HI	36.26350 -90.09890	35,000 ft 10,668 m	84	-
KIMEL FIX	J35 AWY-HI	36.12780 -90.08610	35,000 ft 10,668 m	8	-
MEM VOR	J35 AWY-HI	35.01510 -89.98320	26,300 ft 8,016 m	67	MEMPHIS
WSTON FIX	-	34.69160 -89.97980	22,100 ft 6,736 m	19	-
KLMS APT	-	33.14620 -89.06250	0 ft 0 m	103	LOUISVILLE WINSTON CO

KANE

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 2

Elevation: 912 ft / 278 m
Location: 45.144900 -93.211200
Magnetic Var: 0.312 W

METAR

KANE 062145Z 30015G24KT 10SM SCT050 BKN060 BKN080 21/08 A2970

TAF

UNKNOWN

Frequencies

REC - 120.62 MHz - ATIS
COM - 122.95 MHz - UNICOM
GND - 121.85 MHz -
APP - 126.50 MHz - MINNEAPOLIS APP/DEP
COM - 126.05 MHz - CTAF
CLD - 121.30 MHz - CLNC DEL
TWR - 126.05 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	98 ft	4,861 ft	180.60	ASPHALT	0 ft	0 ft
	30 m	1,482 m	180.91		0 m	0 m
36	98 ft	4,861 ft	0.60	ASPHALT	0 ft	0 ft
	30 m	1,482 m	0.91		0 m	0 m
09	75 ft	3,990 ft	90.71	ASPHALT	0 ft	0 ft
	23 m	1,216 m	91.02		0 m	0 m
27	75 ft	3,990 ft	270.72	ASPHALT	0 ft	0 ft
	23 m	1,216 m	271.03		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
27	DME	IANE	111.15 MHz	18 nm	-	-	912 ft
				33 km	-		912 m
27	LOC-ILS	IANE	111.15 MHz	18 nm	270.71	-	912 ft
				33 km	271.03		912 m
27	GS	IANE	111.15 MHz	10 nm	271.43	3.00	912 ft
				19 km	271.74		912 m