


2024/06/11 0037Z

KLFT HRV **Q105** BLVNS **Q102** CIGAR **M215** KNOST KTPF

552.35 nm / 1022.96 km

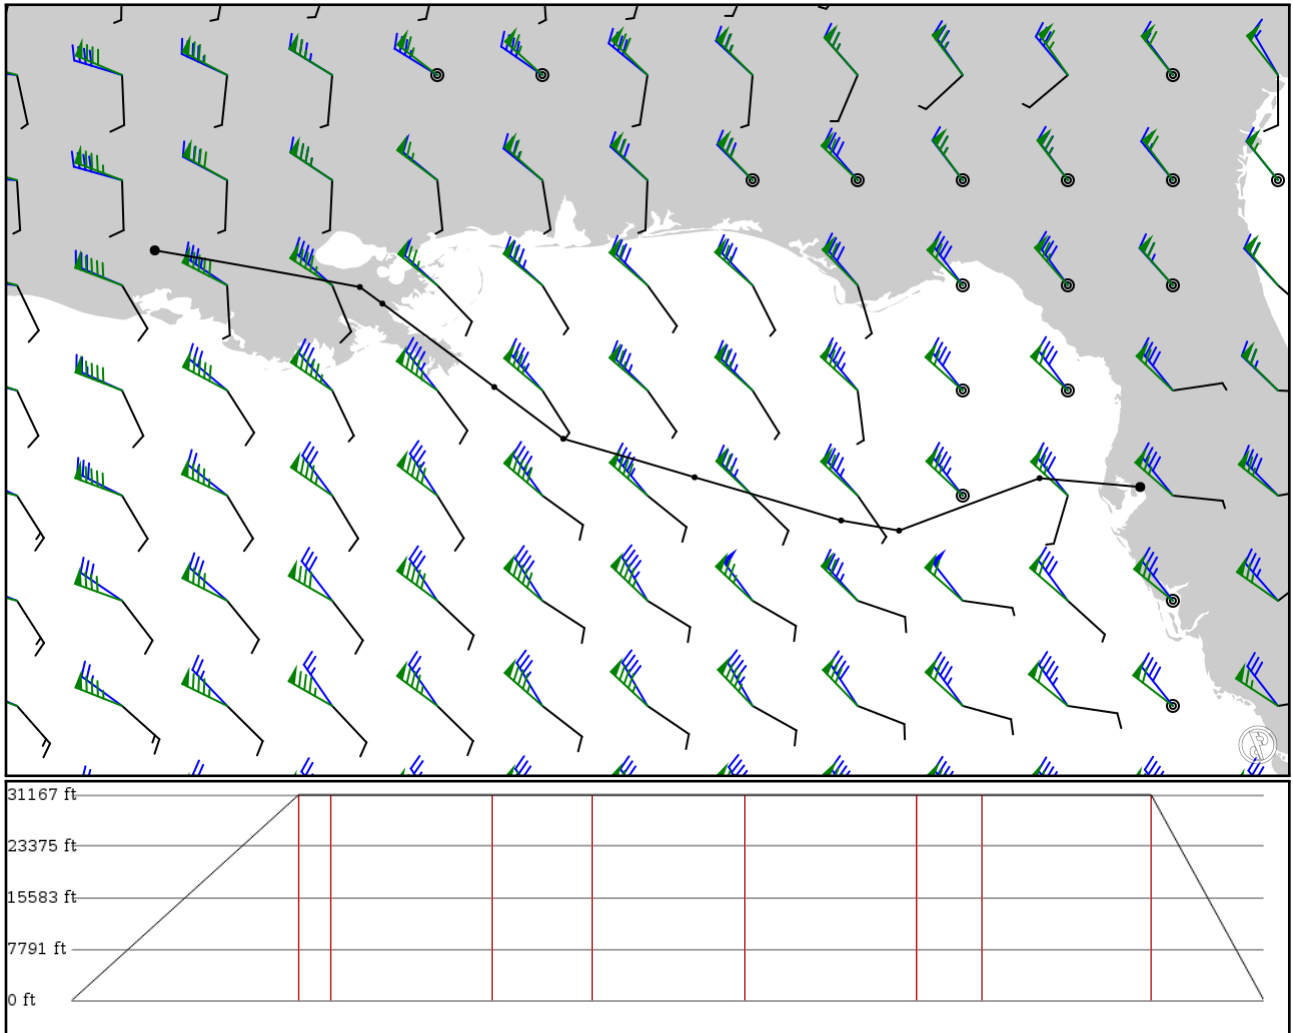

Notes

Basic altitude profile:

- Ascent Rate: 500ft/min
- Ascent Speed: 100kts
- Cruise Altitude: 9500ft
- Cruise Speed: 145kts
- Descent Rate: 500ft/min
- Descent Speed: 144kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLFT	-	30.20500	0 ft	-	LAFAYETTE RGNL
APT	-	-91.98800	0 m		
HRV	-	29.85020	9,500 ft	105	HARVEY (NEW ORLEANS)
VOR	-	-90.00300	2,896 m		
FATSO	Q105	29.69000	9,500 ft	14	-
FIX	AWY-HI	-89.78460	2,896 m		
REDFN	Q105	28.88300	9,500 ft	74	-
FIX	AWY-HI	-88.70180	2,896 m		
BLVNS	Q105	28.38230	9,500 ft	46	-
FIX	AWY-HI	-88.03420	2,896 m		
BUNNZ	Q102	28.00970	9,500 ft	70	-
FIX	AWY-HI	-86.76260	2,896 m		
BACCA	Q102	27.59180	9,500 ft	79	-
FIX	AWY-HI	-85.34430	2,896 m		
CIGAR	Q102	27.49350	9,500 ft	30	-
FIX	AWY-HI	-84.78320	2,896 m		
KNOST	M215	28.00070	9,500 ft	78	-
FIX	AWY-HI	-83.42330	2,896 m		
KTPF	-	27.91560	0 ft	51	Peter O Knight
APT	-	-82.44920	0 m		

KLFT

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 42 ft / 13 m
Location: 30.205000 -91.988000
Magnetic Var: 0.369 W

METAR

KLFT 102353Z 28003KT 10SM FEW095 30/21 A2977 RMK A02 SLP080 T03000211 10328 20300 56011

TAF

KLFT 102333Z 1100/1124 VRB05KT P6SM VCSH SCT040 BKN120 FM110200 VRB03KT P6SM SCT200 FM111400 06006KT P6SM SCT025

Frequencies

REC - 134.05 MHz - ATIS
COM - 122.95 MHz - UNICOM
GND - 121.80 MHz -
APP - 121.10 MHz - APP/DEP
COM - 118.50 MHz - CTAF
CLD - 125.55 MHz - CLNC DEL
TWR - 118.50 MHz -
APP - 128.70 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	150 ft	8,048 ft	38.60	ASPHALT	0 ft	600 ft
	46 m	2,453 m	38.97		0 m	183 m
22L	150 ft	8,048 ft	218.61	ASPHALT	0 ft	102 ft
	46 m	2,453 m	218.98		0 m	31 m
11	148 ft	5,394 ft	109.70	ASPHALT	0 ft	0 ft
	45 m	1,644 m	110.06		0 m	0 m
29	148 ft	5,394 ft	289.70	ASPHALT	0 ft	0 ft
	45 m	1,644 m	290.07		0 m	0 m
04L	75 ft	4,104 ft	38.63	ASPHALT	0 ft	0 ft
	23 m	1,251 m	39.00		0 m	0 m
22R	75 ft	4,104 ft	218.63	ASPHALT	0 ft	0 ft
	23 m	1,251 m	219.00		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	ITYN	110.90 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
22L	DME	ILFT	109.50 MHz	18 nm	-	-	52 ft
				33 km	-		52 m
04R	LOC-ILS	ITYN	110.90 MHz	18 nm	38.12	-	11 ft
				33 km	38.49		11 m
22L	LOC-ILS	ILFT	109.50 MHz	18 nm	219.11	-	42 ft
				33 km	219.48		42 m
04R	GS	ITYN	110.90 MHz	10 nm	39.21	3.00	35 ft
				19 km	39.57		35 m
22L	GS	ILFT	109.50 MHz	10 nm	219.21	3.00	35 ft
				19 km	219.57		35 m