


MI92
Lilienthal

KORD
Chicago O'Hare International

2024/06/04 1315Z

MI92 SHOOD **V217** HISUB KORD

239.03 nm / 442.68 km

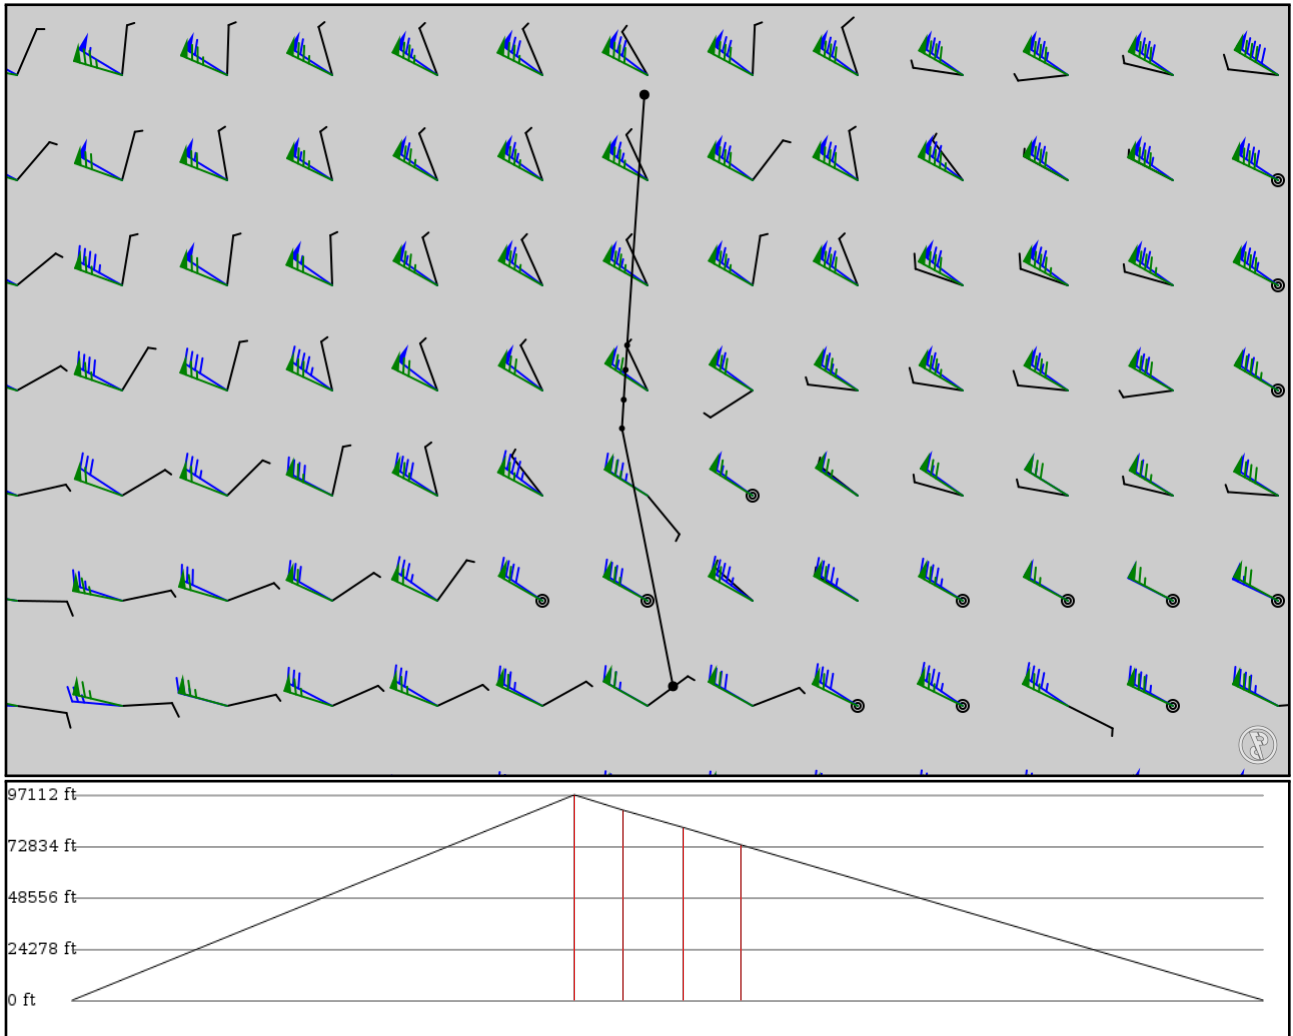

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
MI92 APT	-	45.93270 -88.09820	0 ft 0 m	-	Lilienthal
SHOOD FIX	-	44.25550 -88.21380	29,600 ft 9,022 m	100	-
CHING FIX	V217 AWY-LO	44.09140 -88.22420	27,400 ft 8,352 m	9	-
LEWKO FIX	V217 AWY-LO	43.89110 -88.23670	24,900 ft 7,590 m	12	-
HISUB FIX	V217 AWY-LO	43.69970 -88.24860	22,400 ft 6,828 m	11	-
KORD APT	-	41.97340 -87.90660	0 ft 0 m	104	Chicago O'Hare International

KORD

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 6

Elevation: 680 ft / 207 m
Location: 41.973400 -87.906600
Magnetic Var: 4.115 W

METAR

KORD 041251Z 18008KT 10SM FEW120 OVC250 23/17 A2980 RMK A02 SLP084 T02330167

TAF

TAF KORD 041121Z 0412/0518 18008KT P6SM FEW050 BKN250 FM041700 17012G18KT P6SM SCT050 BKN200 FM042100 18014G22KT

Frequencies

REC - 135.40 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 119.25 MHz - CLEARANCE DELIVERY	CLD - 121.60 MHz - CLEARANCE DELIVERY
GND - 118.05 MHz - O'HARE GROUND	GND - 121.67 MHz - O'HARE GROUND
GND - 121.75 MHz - O'HARE GROUND	GND - 121.90 MHz - O'HARE GROUND
GND - 124.12 MHz - O'HARE GROUND	GND - 134.12 MHz - O'HARE GROUND
TWR - 120.75 MHz - O'HARE TOWER	TWR - 121.15 MHz - O'HARE TOWER
TWR - 126.90 MHz - O'HARE TOWER	TWR - 127.92 MHz - O'HARE TOWER
TWR - 132.70 MHz - O'HARE TOWER	TWR - 128.15 MHz - O'HARE TOWER
TWR - 133.00 MHz - O'HARE TOWER	APP - 119.00 MHz - CHICAGO APPROACH
APP - 133.62 MHz - CHICAGO APPROACH	APP - 124.35 MHz - CHICAGO APPROACH
APP - 125.70 MHz - CHICAGO APPROACH	DEP - 125.00 MHz - CHICAGO DEPARTURE
DEP - 125.40 MHz - CHICAGO DEPARTURE	DEP - 127.40 MHz - CHICAGO DEPARTURE
DEP - 128.80 MHz - CHICAGO DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10C	200 ft	10,789 ft	89.85	CONCRETE	0 ft	397 ft
	61 m	3,289 m	93.97		0 m	121 m
28C	200 ft	10,789 ft	269.88	CONCRETE	0 ft	381 ft
	61 m	3,289 m	273.99		0 m	116 m
10L	151 ft	12,996 ft	89.87	CONCRETE	0 ft	394 ft
	46 m	3,961 m	93.99		0 m	120 m
28R	151 ft	12,996 ft	269.91	CONCRETE	0 ft	285 ft
	46 m	3,961 m	274.02		0 m	87 m
04R	151 ft	8,074 ft	41.40	CONCRETE	0 ft	850 ft
	46 m	2,461 m	45.52		0 m	259 m
22L	151 ft	8,074 ft	221.41	CONCRETE	0 ft	584 ft
	46 m	2,461 m	225.53		0 m	178 m
09R	151 ft	7,949 ft	89.98	CONCRETE	0 ft	148 ft
	46 m	2,423 m	94.09		0 m	45 m
27L	151 ft	7,949 ft	270.00	CONCRETE	0 ft	197 ft
	46 m	2,423 m	274.11		0 m	60 m
09L	151 ft	7,484 ft	89.99	CONCRETE	0 ft	397 ft
	46 m	2,281 m	94.10		0 m	121 m
27R	151 ft	7,484 ft	270.00	CONCRETE	0 ft	397 ft
	46 m	2,281 m	274.12		0 m	121 m
10R	151 ft	7,484 ft	89.85	CONCRETE	0 ft	400 ft
	46 m	2,281 m	93.97		0 m	122 m
28L	151 ft	7,484 ft	269.87	CONCRETE	0 ft	400 ft
	46 m	2,281 m	273.98		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	ISAJ	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
10L	DME	IMED	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
27L	DME	IIAC	110.50 MHz	18 nm	-	-	641 ft
				33 km	-		641 m
27R	DME	IABU	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
28R	DME	ITSL	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
04R	LOC-ILS	IFJU	110.10 MHz	18 nm	41.41	-	680 ft
				33 km	45.52		680 m
09L	LOC-ILS	ISAJ	111.75 MHz	18 nm	90.00	-	680 ft
				33 km	94.11		680 m
09R	LOC-ILS	IJAV	110.50 MHz	18 nm	89.99	-	680 ft
				33 km	94.10		680 m
10L	LOC-ILS	IMED	111.10 MHz	18 nm	89.89	-	680 ft
				33 km	94.00		680 m
10C	LOC-ILS	ISXH	108.95 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
10R	LOC-ILS	IIZJ	110.75 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
22L	LOC-ILS	ILQQ	110.10 MHz	18 nm	221.41	-	680 ft
				33 km	225.52		680 m
27L	LOC-ILS	IIAC	110.50 MHz	18 nm	269.99	-	680 ft
				33 km	274.10		680 m
27R	LOC-ILS	IABU	111.75 MHz	18 nm	270.00	-	680 ft
				33 km	274.11		680 m
28L	LOC-ILS	IVQX	110.75 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28C	LOC-ILS	IVZE	108.95 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28R	LOC-ILS	ITSL	111.10 MHz	18 nm	269.88	-	680 ft
				33 km	273.99		680 m
04R	GS	IFJU	110.10 MHz	10 nm	41.41	3.00	680 ft
				19 km	45.52		680 m
09L	GS	ISAJ	111.75 MHz	10 nm	90.00	3.00	680 ft
				19 km	94.11		680 m
09R	GS	IJAV	110.50 MHz	10 nm	89.99	3.00	680 ft
				19 km	94.10		680 m
10L	GS	IMED	111.10 MHz	10 nm	89.89	3.00	680 ft
				19 km	94.00		680 m
10C	GS	ISXH	108.95 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
10R	GS	IIZJ	110.75 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
22L	GS	ILQQ	110.10 MHz	10 nm	221.41	3.00	680 ft
				19 km	225.52		680 m
27L	GS	IIAC	110.50 MHz	10 nm	269.99	3.00	680 ft
				19 km	274.10		680 m
27R	GS	IABU	111.75 MHz	10 nm	270.00	3.00	680 ft
				19 km	274.11		680 m
28L	GS	IVQX	110.75 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28C	GS	IVZE	108.95 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28R	GS	ITSL	111.10 MHz	10 nm	269.88	3.00	680 ft
				19 km	273.99		680 m