

KORD

Chicago O'Hare International


KIND

Indianapolis International Airport

2024/05/04 0507Z

KORD LUCIT KIND

154.09 nm / 285.38 km

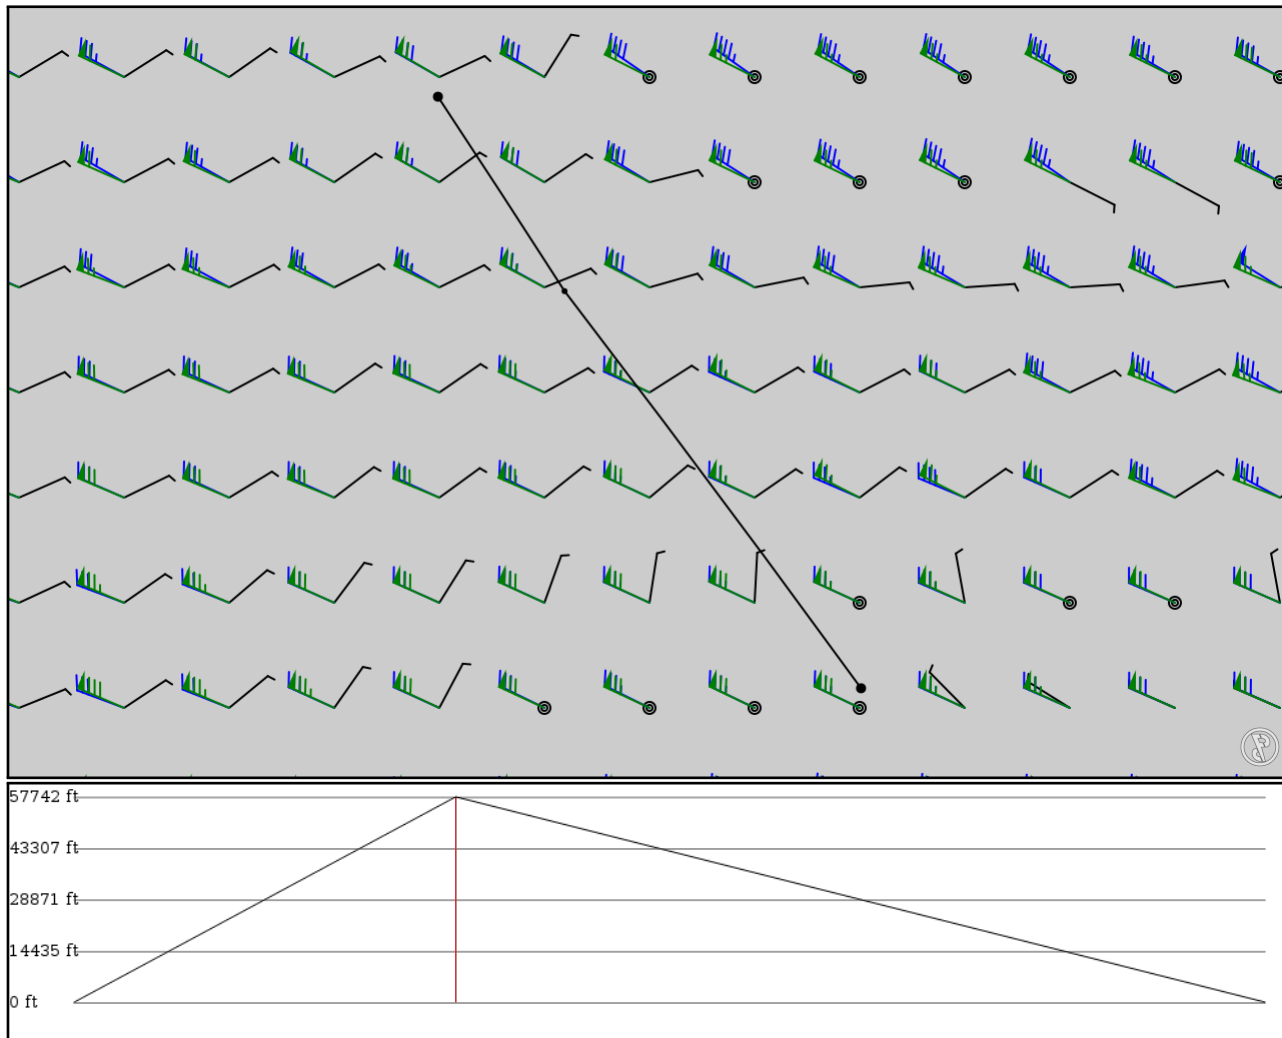

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
KORD	-	41.97340	0 ft	-	Chicago O'Hare International	
APT	-	-87.90660	0 m			
LUCIT	-	41.23230	17,600 ft	49	-	
FIX	-	-87.42370	5,364 m			
KIND	-	39.71820	0 ft	104	Indianapolis International Airport	
APT	-	-86.29280	0 m			

KORD

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 6

Elevation: 680 ft / 207 m
Location: 41.973400 -87.906600
Magnetic Var: 4.110 W

METAR

KORD 040351Z 10004KT 10SM CLR 12/03 A3004 RMK A02 SLP172 T01220033

TAF

TAF AMD KORD 040302Z 0403/0506 05005KT P6SM FEW250 FM041200 15007KT P6SM FEW015 SCT250 FM041800 20011KT P6SM FEW0

Frequencies

REC - 135.40 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 119.25 MHz - CLEARANCE DELIVERY	CLD - 121.60 MHz - CLEARANCE DELIVERY
GND - 118.05 MHz - O'HARE GROUND	GND - 121.67 MHz - O'HARE GROUND
GND - 121.75 MHz - O'HARE GROUND	GND - 121.90 MHz - O'HARE GROUND
GND - 124.12 MHz - O'HARE GROUND	GND - 134.12 MHz - O'HARE GROUND
TWR - 120.75 MHz - O'HARE TOWER	TWR - 121.15 MHz - O'HARE TOWER
TWR - 126.90 MHz - O'HARE TOWER	TWR - 127.92 MHz - O'HARE TOWER
TWR - 132.70 MHz - O'HARE TOWER	TWR - 128.15 MHz - O'HARE TOWER
TWR - 133.00 MHz - O'HARE TOWER	APP - 119.00 MHz - CHICAGO APPROACH
APP - 133.62 MHz - CHICAGO APPROACH	APP - 124.35 MHz - CHICAGO APPROACH
APP - 125.70 MHz - CHICAGO APPROACH	DEP - 125.00 MHz - CHICAGO DEPARTURE
DEP - 125.40 MHz - CHICAGO DEPARTURE	DEP - 127.40 MHz - CHICAGO DEPARTURE
DEP - 128.80 MHz - CHICAGO DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10C	200 ft	10,789 ft	89.85	CONCRETE	0 ft	397 ft
	61 m	3,289 m	93.96		0 m	121 m
28C	200 ft	10,789 ft	269.88	CONCRETE	0 ft	381 ft
	61 m	3,289 m	273.99		0 m	116 m
10L	151 ft	12,996 ft	89.87	CONCRETE	0 ft	394 ft
	46 m	3,961 m	93.98		0 m	120 m
28R	151 ft	12,996 ft	269.91	CONCRETE	0 ft	285 ft
	46 m	3,961 m	274.02		0 m	87 m
04R	151 ft	8,074 ft	41.40	CONCRETE	0 ft	850 ft
	46 m	2,461 m	45.51		0 m	259 m
22L	151 ft	8,074 ft	221.41	CONCRETE	0 ft	584 ft
	46 m	2,461 m	225.52		0 m	178 m
09R	151 ft	7,949 ft	89.98	CONCRETE	0 ft	148 ft
	46 m	2,423 m	94.09		0 m	45 m
27L	151 ft	7,949 ft	270.00	CONCRETE	0 ft	197 ft
	46 m	2,423 m	274.11		0 m	60 m
09L	151 ft	7,484 ft	89.99	CONCRETE	0 ft	397 ft
	46 m	2,281 m	94.10		0 m	121 m
27R	151 ft	7,484 ft	270.00	CONCRETE	0 ft	397 ft
	46 m	2,281 m	274.11		0 m	121 m
10R	151 ft	7,484 ft	89.85	CONCRETE	0 ft	400 ft
	46 m	2,281 m	93.96		0 m	122 m
28L	151 ft	7,484 ft	269.87	CONCRETE	0 ft	400 ft
	46 m	2,281 m	273.98		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	ISAJ	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
10L	DME	IMED	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
27L	DME	IIAC	110.50 MHz	18 nm	-	-	641 ft
				33 km	-		641 m
27R	DME	IABU	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
28R	DME	ITSL	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
04R	LOC-ILS	IFJU	110.10 MHz	18 nm	41.41	-	680 ft
				33 km	45.52		680 m
09L	LOC-ILS	ISAJ	111.75 MHz	18 nm	90.00	-	680 ft
				33 km	94.11		680 m
09R	LOC-ILS	IJAV	110.50 MHz	18 nm	89.99	-	680 ft
				33 km	94.10		680 m
10L	LOC-ILS	IMED	111.10 MHz	18 nm	89.89	-	680 ft
				33 km	94.00		680 m
10C	LOC-ILS	ISXH	108.95 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
10R	LOC-ILS	IIZJ	110.75 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
22L	LOC-ILS	ILQQ	110.10 MHz	18 nm	221.41	-	680 ft
				33 km	225.52		680 m
27L	LOC-ILS	IIAC	110.50 MHz	18 nm	269.99	-	680 ft
				33 km	274.10		680 m
27R	LOC-ILS	IABU	111.75 MHz	18 nm	270.00	-	680 ft
				33 km	274.11		680 m
28L	LOC-ILS	IVQX	110.75 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28C	LOC-ILS	IVZE	108.95 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28R	LOC-ILS	ITSL	111.10 MHz	18 nm	269.88	-	680 ft
				33 km	273.99		680 m
04R	GS	IFJU	110.10 MHz	10 nm	41.41	3.00	680 ft
				19 km	45.52		680 m
09L	GS	ISAJ	111.75 MHz	10 nm	90.00	3.00	680 ft
				19 km	94.11		680 m
09R	GS	IJAV	110.50 MHz	10 nm	89.99	3.00	680 ft
				19 km	94.10		680 m
10L	GS	IMED	111.10 MHz	10 nm	89.89	3.00	680 ft
				19 km	94.00		680 m
10C	GS	ISXH	108.95 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
10R	GS	IIZJ	110.75 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
22L	GS	ILQQ	110.10 MHz	10 nm	221.41	3.00	680 ft
				19 km	225.52		680 m
27L	GS	IIAC	110.50 MHz	10 nm	269.99	3.00	680 ft
				19 km	274.10		680 m
27R	GS	IABU	111.75 MHz	10 nm	270.00	3.00	680 ft
				19 km	274.11		680 m
28L	GS	IVQX	110.75 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28C	GS	IVZE	108.95 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28R	GS	ITSL	111.10 MHz	10 nm	269.88	3.00	680 ft
				19 km	273.99		680 m

KIND

Region: UNITED STATES
Timezone: AMERICA/INDIANA/INDIANAPOLIS
Runways: 3

Elevation: 793 ft / 242 m
Location: 39.718200 -86.292800
Magnetic Var: 5.030 W

METAR

KIND 040354Z 01009KT 10SM FEW045 SCT060 OVC240 20/16 A2999 RMK A02 SLP150 T02000156

TAF

TAF AMD KIND 040221Z 0402/0506 03005KT P6SM FEW040 BKN080 FM040800 05005KT 6SM BR BKN025 FM041400 12005KT P6SM BKN

Frequencies

REC - 124.40 MHz - ATIS	REC - 134.25 MHz - ATIS
COM - 122.95 MHz - UNICOM	CLD - 128.75 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - INDY GROUND	GND - 121.90 MHz - INDY GROUND
TWR - 120.90 MHz - INDY TOWER	TWR - 127.82 MHz - INDY TOWER
APP - 119.30 MHz - INDIANAPOLIS APPROACH	APP - 124.65 MHz - INDIANAPOLIS APPROACH
APP - 127.15 MHz - INDIANAPOLIS APPROACH	DEP - 119.05 MHz - INDIANAPOLIS DEPARTURE
DEP - 124.95 MHz - INDIANAPOLIS DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05L	151 ft	11,210 ft	44.43	CONCRETE	0 ft	0 ft
	46 m	3,417 m	49.46		0 m	0 m
23R	151 ft	11,210 ft	224.45	CONCRETE	0 ft	0 ft
	46 m	3,417 m	229.48		0 m	0 m
05R	151 ft	10,009 ft	44.45	CONCRETE	0 ft	0 ft
	46 m	3,051 m	49.48		0 m	0 m
23L	151 ft	10,009 ft	224.47	CONCRETE	0 ft	0 ft
	46 m	3,051 m	229.50		0 m	0 m
14	151 ft	7,284 ft	134.65	CONCRETE	0 ft	0 ft
	46 m	2,220 m	139.68		0 m	0 m
32	151 ft	7,284 ft	314.66	CONCRETE	0 ft	0 ft
	46 m	2,220 m	319.69		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	DME	IIND	111.75 MHz	18 nm	-	-	1,010 ft
				33 km	-		1,010 m
05R	DME	IOQV	111.15 MHz	18 nm	-	-	797 ft
				33 km	-		797 m
23L	DME	IFVJ	111.15 MHz	18 nm	-	-	797 ft
				33 km	-		797 m
23R	DME	IUZK	111.75 MHz	18 nm	-	-	1,010 ft
				33 km	-		1,010 m
05L	LOC-ILS	IIND	111.75 MHz	18 nm	44.45	-	797 ft
				33 km	49.48		797 m
05R	LOC-ILS	IOQV	111.15 MHz	18 nm	44.46	-	797 ft
				33 km	49.49		797 m
14	LOC-ILS	IBJP	110.50 MHz	18 nm	134.67	-	797 ft
				33 km	139.70		797 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
23L	LOC-ILS	IFVJ	111.15 MHz	18 nm	224.43	-	797 ft
				33 km	229.46		797 m
23R	LOC-ILS	IUZK	111.75 MHz	18 nm	224.42	-	797 ft
				33 km	229.45		797 m
32	LOC-ILS	ICOA	110.50 MHz	18 nm	314.66	-	797 ft
				33 km	319.69		797 m
05L	GS	IIND	111.75 MHz	10 nm	44.86	3.00	741 ft
				19 km	49.89		741 m
05R	GS	IOQV	111.15 MHz	10 nm	44.88	3.00	790 ft
				19 km	49.91		790 m
14	GS	IBJP	110.50 MHz	10 nm	135.34	3.00	797 ft
				19 km	140.37		797 m
23L	GS	IFVJ	111.15 MHz	10 nm	224.88	3.00	788 ft
				19 km	229.91		788 m
23R	GS	IUZK	111.75 MHz	10 nm	224.86	3.00	777 ft
				19 km	229.89		777 m
32	GS	ICOA	110.50 MHz	10 nm	315.34	3.00	797 ft
				19 km	320.37		797 m