

FHAW

Ascension Wideawake Field


SBRF

Recife-Guararapes Intl

2024/05/16 0601Z

FHAW FHAW **UL695** DAGAM **UL335** MELEM 900S02200W 900S02300W 900S02400W 900S02500W 900S02600W
900S02700W 900S02800W 900S02900W 900S03000W 900S03100W 900S03200W FLUTE KULEP SBRF

1316.78 nm / 2438.68 km

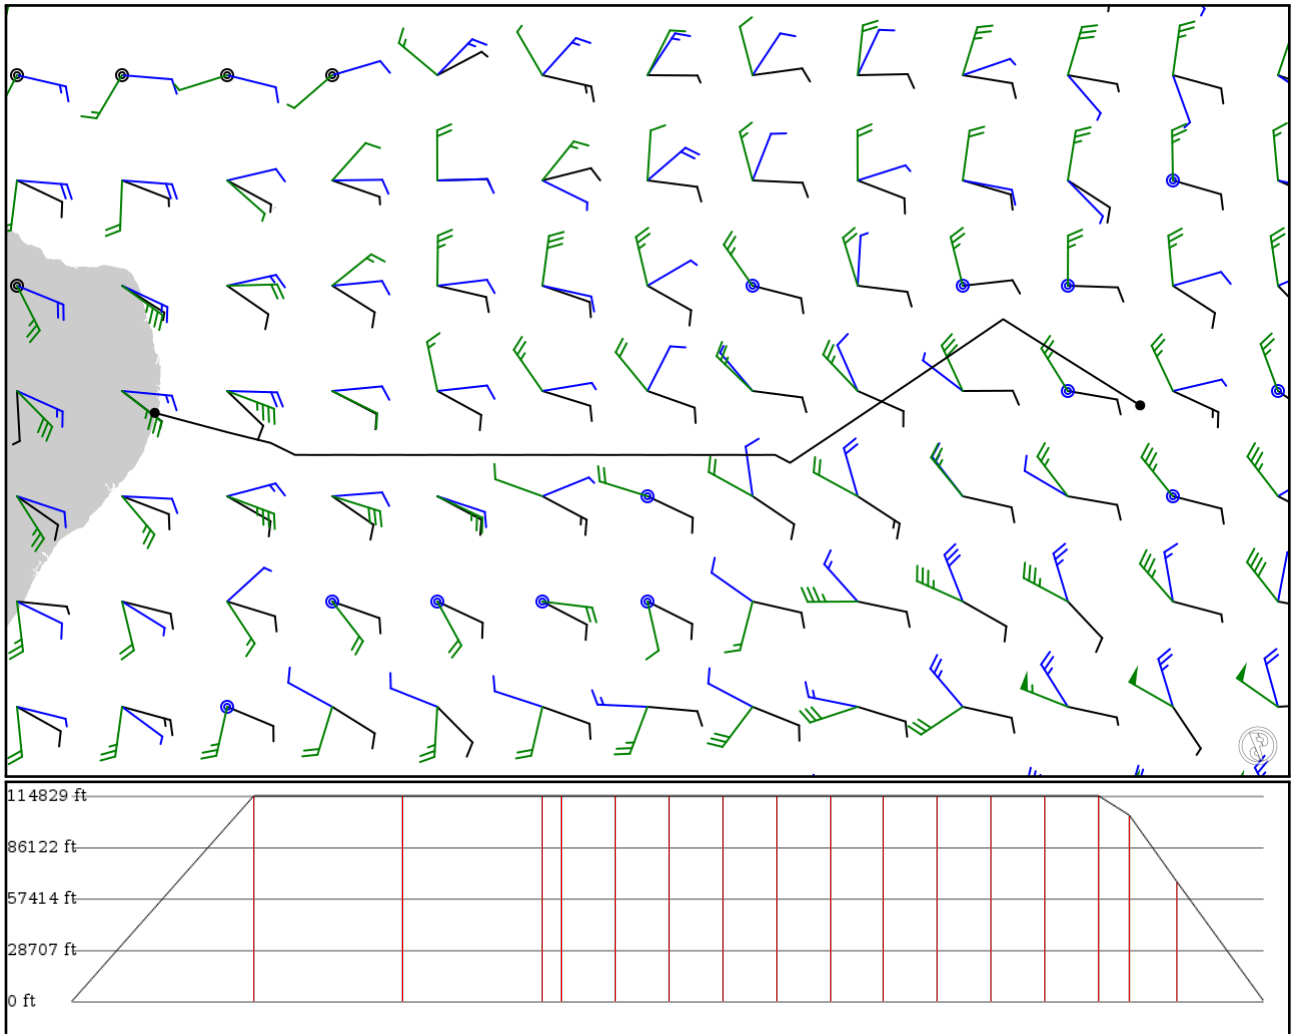

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FHAW APT	-	-7.96944 -14.39390	0 ft 0 m	-	Ascension Wideawake Field
FHAW FIX	-	-7.97000 -14.39330	0 ft 0 m	0	-
DAGAM FIX	UL695 AWY-HI	-6.17800 -17.24800	35,000 ft 10,668 m	201	-
ISUPA FIX	UL335 AWY-HI	-7.71917 -19.52820	35,000 ft 10,668 m	164	-
MELEM FIX	UL335 AWY-HI	-9.16325 -21.68870	35,000 ft 10,668 m	154	-
900S02200W LATLON	-	-9.00000 -22.00000	35,000 ft 10,668 m	20	-
900S02300W LATLON	-	-9.00000 -23.00000	35,000 ft 10,668 m	59	-
900S02400W LATLON	-	-9.00000 -24.00000	35,000 ft 10,668 m	59	-
900S02500W LATLON	-	-9.00000 -25.00000	35,000 ft 10,668 m	59	-
900S02600W LATLON	-	-9.00000 -26.00000	35,000 ft 10,668 m	59	-
900S02700W LATLON	-	-9.00000 -27.00000	35,000 ft 10,668 m	59	-
900S02800W LATLON	-	-9.00000 -28.00000	35,000 ft 10,668 m	59	-
900S02900W LATLON	-	-9.00000 -29.00000	35,000 ft 10,668 m	59	-
900S03000W LATLON	-	-9.00000 -30.00000	35,000 ft 10,668 m	59	-
900S03100W LATLON	-	-9.00000 -31.00000	35,000 ft 10,668 m	59	-
900S03200W LATLON	-	-9.00000 -32.00000	35,000 ft 10,668 m	59	-
FLUTE FIX	-	-8.75067 -32.50980	31,700 ft 9,662 m	33	-
KULEP FIX	-	-8.53767 -33.37580	20,400 ft 6,218 m	52	-
SBRF APT	-	-8.12547 -34.92350	0 ft 0 m	95	Recife-Guararapes Intl

SBRF

Region: BRAZIL
Timezone: AMERICA/RECIFE
Runways: 1

Elevation: 33 ft / 10 m
Location: -8.125470 -34.923500
Magnetic Var: 21.888 W

METAR

SBRF 160500Z 2400KT 9999 SCT023 SCT060 25/24 Q1012

TAF

TAF SBRF 152100Z 1600/1624 15006KT 7000 BKN020 TN25/1608Z TX30/1616Z BECMG 1600/1602 17006KT BECMG 1606/1608 2100

Frequencies

REC - 127.65 MHz - ATIS	CLD - 118.90 MHz - RECIFE CLEARANCE
CLD - 120.40 MHz - RECIFE CLEARANCE	GND - 121.85 MHz - RECIFE GROUND
TWR - 118.35 MHz - RECIFE TOWER	TWR - 122.80 MHz - RECIFE TOWER
TWR - 125.25 MHz - RECIFE TOWER	APP - 119.50 MHz - RECIFE APPROACH
APP - 119.95 MHz - RECIFE APPROACH	APP - 120.40 MHz - RECIFE APPROACH
APP - 129.60 MHz - RECIFE APPROACH	COM - 122.80 MHz - UNICOM

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	148 ft	10,906 ft	161.89	ASPHALT	978 ft	0 ft
	45 m	3,324 m	183.78		298 m	0 m
36	148 ft	10,906 ft	341.89	ASPHALT	0 ft	528 ft
	45 m	3,324 m	3.78		0 m	161 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18	LOC-ILS	IRF	110.30 MHz	18 nm	161.89	-	33 ft
				33 km	183.78		33 m
18	GS	IRF	110.30 MHz	10 nm	162.89	3.00	33 ft
				19 km	184.78		33 m