


2024/06/04 0043Z

VHHH MAGOG A1 APU G587 PABSO R583 BISIS ROAH

837.04 nm / 1550.20 km

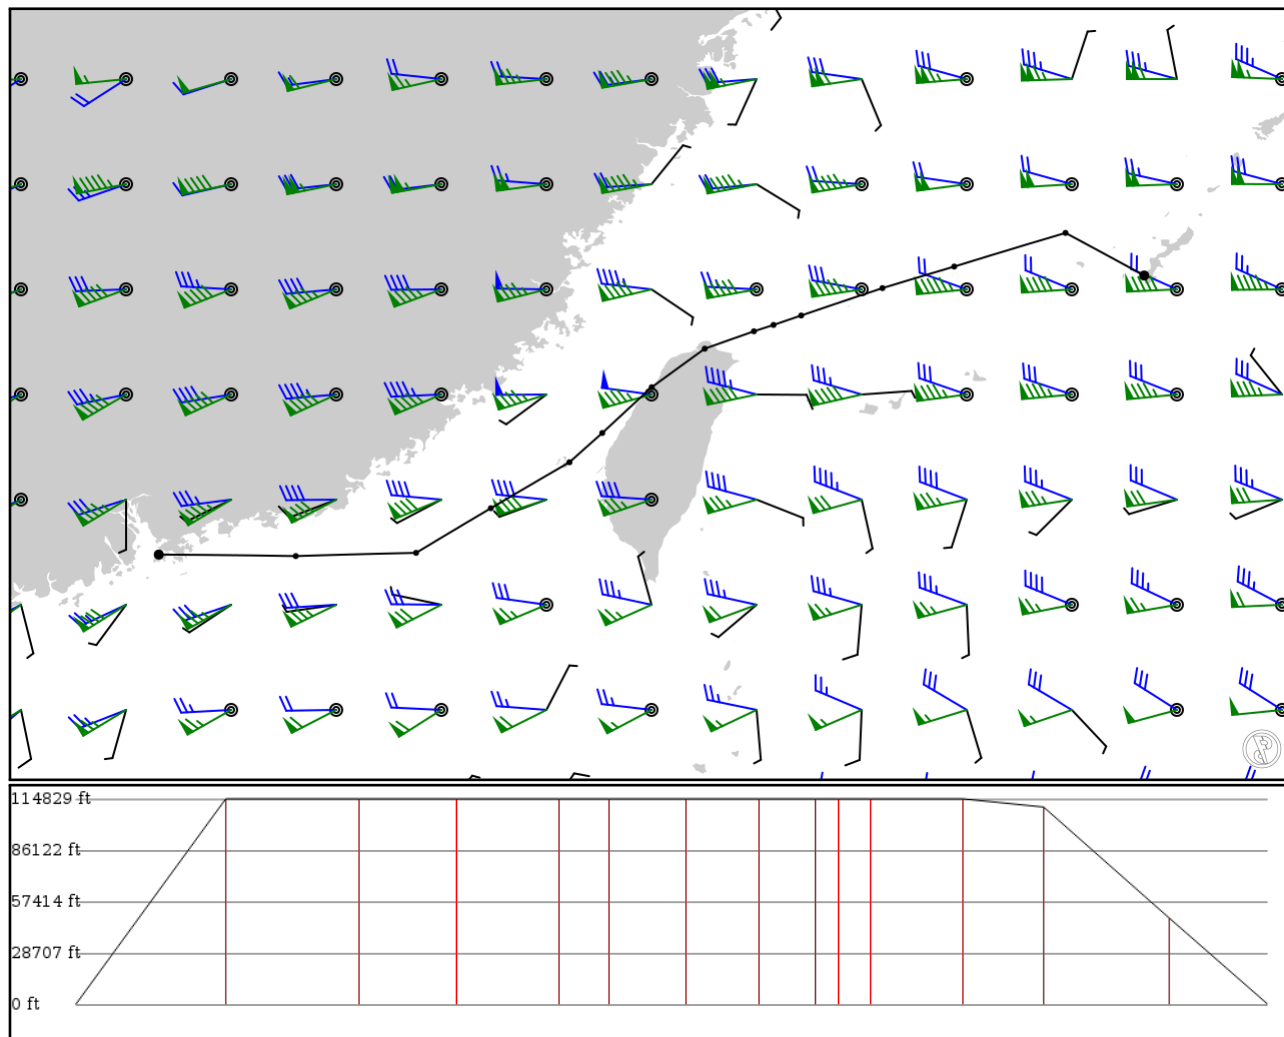

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
VHHH	-	22.30899	0 ft	-	Hong Kong Intl
APT	-	113.91461	0 m		
MAGOG	-	22.28833	35,000 ft	106	-
FIX	-	115.82333	10,668 m		
ELATO	A1	22.33333	35,000 ft	93	-
FIX	AWY-LO	117.50000	10,668 m		
KADLO	A1	22.95506	35,000 ft	68	-
FIX	AWY-LO	118.54172	10,668 m		
MKG	A1	23.59544	35,000 ft	71	MAGONG VOR-DME
VOR	AWY-LO	119.63728	10,668 m		
SWORD	A1	24.00250	35,000 ft	35	-
FIX	AWY-LO	120.09417	10,668 m		
HLG	A1	24.64000	35,000 ft	53	HOULONG VOR-DME
VOR	AWY-LO	120.78333	10,668 m		
APU	A1	25.17694	35,000 ft	51	ANBU VOR-DME
VOR	AWY-LO	121.52222	10,668 m		
ROBIN	G587	25.41917	35,000 ft	39	-
FIX	AWY-LO	122.20778	10,668 m		
LEKOS	G587	25.50750	35,000 ft	15	-
FIX	AWY-LO	122.48056	10,668 m		
PABSO	G587	25.63911	35,000 ft	22	-
FIX	AWY-LO	122.86603	10,668 m		
BORDO	R583	26.02067	35,000 ft	65	-
FIX	AWY-LO	123.99838	10,668 m		
ENTOK	R583	26.32065	33,600 ft	56	-
FIX	AWY-LO	124.99829	10,241 m		
BISIS	R583	26.78922	14,700 ft	87	-
FIX	AWY-LO	126.54925	4,481 m		
ROAH	-	26.19582	0 ft	68	NAHA
APT	-	127.64587	0 m		

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.242 W

METAR

VHHH 040030Z 09014KT 9999 FEW010 SCT025 25/22 Q1009 NOSIG

TAF

TAF VHHH 032300Z 0400/0506 09015KT 9999 FEW010 SCT025 TX28/0406Z TX28/0506Z TN24/0422Z TEMPO 0400/0406 10022G35K

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.02		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m

ROAH

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 11 ft / 3 m
Location: 26.193400 127.639000
Magnetic Var: 5.807 W

METAR

ROAH 040030Z 01016KT 9999 FEW030 26/19 Q1011

TAF

TAF ROAH 032308Z 0400/0506 01017KT 9999 FEW025 SCT035 BECMG 0500/0503 08012KT

Frequencies

REC - 127.80 MHz - NAHA AIRPORT	TWR - 118.10 MHz - NAHA TOWER
TWR - 118.75 MHz - NAHA TOWER	TWR - 126.20 MHz - NAHA TOWER
GND - 121.80 MHz - NAHA GROUND	GND - 121.90 MHz - NAHA GROUND
CLD - 122.07 MHz - NAHA DELIVERY	APP - 119.10 MHz - NAHA APPROACH
APP - 126.50 MHz - NAHA APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18R	194 ft	8,892 ft	177.57	ASPHALT	0 ft	1,037 ft
	59 m	2,710 m	183.38		0 m	316 m
36L	194 ft	8,892 ft	357.57	ASPHALT	0 ft	1,040 ft
	59 m	2,710 m	3.38		0 m	317 m
18L	145 ft	10,027 ft	177.59	ASPHALT	141 ft	489 ft
	44 m	3,056 m	183.40		43 m	149 m
36R	145 ft	10,027 ft	357.59	ASPHALT	0 ft	495 ft
	44 m	3,056 m	3.40		0 m	151 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18R	LOC-ILS	ION	110.15 MHz	18 nm	177.57	-	11 ft
				33 km	183.38		11 m
36L	LOC-ILS	IOW	111.70 MHz	18 nm	357.57	-	11 ft
				33 km	3.38		11 m
36R	LOC-ILS	IOK	110.30 MHz	18 nm	357.59	-	11 ft
				33 km	3.40		11 m
18R	GS	ION	110.15 MHz	10 nm	177.57	3.00	11 ft
				19 km	183.38		11 m
36L	GS	IOW	111.70 MHz	10 nm	357.57	3.00	11 ft
				19 km	3.38		11 m
36R	GS	IOK	110.30 MHz	10 nm	357.59	3.00	11 ft
				19 km	3.40		11 m