

YSSY

Sydney Kingsford Smith Intl


KLAX

Los Angeles Intl

2024/06/04 0948Z

YSSY SHAZA **A579** NN **B581** FICKY **C1177** MALIT KLAX

6527.70 nm / 12089.30 km

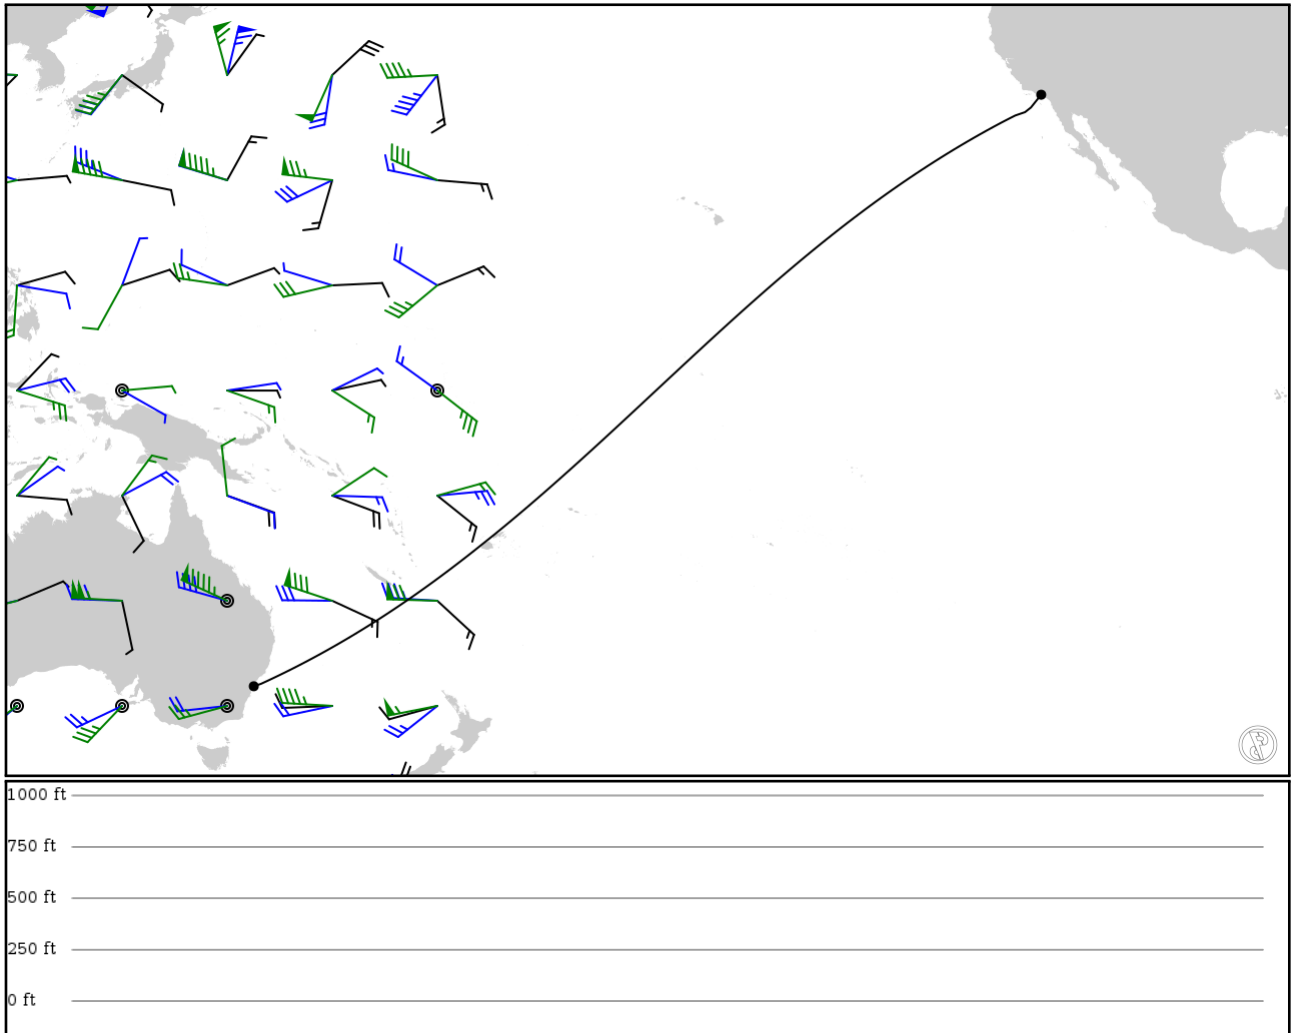

Notes

Requested: YSSY SHAZA A579 NN B581 FICKY C1177 MALIT KLAX

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
YSSY	-	-33.94610	0 ft	-	Sydney Kingsford Smith Intl
APT	-	151.17700	0 m	-	
SHAZA	-	-33.66100	0 ft	45	-
FIX	-	152.01500	0 m	-	-
JORDY	A579	-32.39250	0 ft	154	-
FIX	AWY-HI	154.68700	0 m	-	-
NATLI	A579	-31.00860	0 ft	161	-
FIX	AWY-HI	157.39700	0 m	-	-
UBLIN	A579	-27.82810	0 ft	349	-
FIX	AWY-HI	163.00000	0 m	-	-
VIRAR	A579	-24.79330	0 ft	313	-
FIX	AWY-HI	167.74200	0 m	-	-
NONON	A579	-23.32500	0 ft	146	-
FIX	AWY-HI	169.87500	0 m	-	-
PUPEX	A579	-22.10000	0 ft	120	-
FIX	AWY-HI	171.58800	0 m	-	-
TEPEK	A579	-18.72170	0 ft	322	-
FIX	AWY-HI	176.05300	0 m	-	-
NN	A579	-17.65470	0 ft	99	NADI
VOR	AWY-HI	177.39600	0 m	-	
BIDAN	B581	-16.58670	0 ft	100	-
FIX	AWY-HI	178.73300	0 m	-	-
BAXIL	B581	-13.02100	0 ft	327	-
FIX	AWY-HI	-176.99800	0 m	-	-
GOBIN	B581	-9.46436	0 ft	320	-
FIX	AWY-HI	-172.93800	0 m	-	-
WOoby	B581	-5.00000	0 ft	397	-
FIX	AWY-HI	-168.02000	0 m	-	-
WACOS	B581	-1.27056	0 ft	329	-
FIX	AWY-HI	-164.00000	0 m	-	-
WOSLU	B581	5.00000	0 ft	552	-
FIX	AWY-HI	-157.25200	0 m	-	-
WAYSE	B581	8.13500	0 ft	278	-
FIX	AWY-HI	-153.82200	0 m	-	-
WINTY	B581	11.53330	0 ft	304	-
FIX	AWY-HI	-150.00000	0 m	-	-
CAMOS	B581	14.88810	0 ft	305	-
FIX	AWY-HI	-146.07200	0 m	-	-
BALKS	B581	20.22830	0 ft	500	-
FIX	AWY-HI	-139.35400	0 m	-	-
AFONE	B581	25.30000	0 ft	501	-
FIX	AWY-HI	-132.16200	0 m	-	-
WEDES	B581	30.66810	0 ft	577	-
FIX	AWY-HI	-123.12400	0 m	-	-
FICKY	B581	31.55760	0 ft	103	-
FIX	AWY-HI	-121.39200	0 m	-	-
ROSIN	C1177	31.94210	0 ft	61	-
FIX	AWY-HI	-120.26800	0 m	-	-
MALIT	C1177	32.47560	0 ft	47	-
FIX	AWY-HI	-119.59100	0 m	-	-
KLAX	-	33.94310	0 ft	106	Los Angeles Intl
APT	-	-118.40900	0 m	-	

YSSY

Region: AUSTRALIA
Timezone: AUSTRALIA/SYDNEY
Runways: 3

Elevation: 21 ft / 6 m
Location: -33.946100 151.177000
Magnetic Var: 12.672 E

METAR

YSSY 040930Z 24010KT CAVOK 14/08 Q1017

TAF

TAF YSSY 040800Z 0408/0512 29007KT 9999 SCT030 FM050000 18013KT 9999 SCT030 FM051000 28008KT 9999 -SHRA SCT020 IN

Frequencies

REC - 118.55 MHz - ATIS	REC - 126.55 MHz - ATIS
TWR - 124.70 MHz - SYDNEY TOWER	TWR - 120.50 MHz - SYDNEY TOWER
GND - 126.50 MHz - SYDNEY GROUND	GND - 121.70 MHz - SYDNEY GROUND
GND - 130.95 MHz - ANSETT APRON	GND - 127.60 MHz - SYDNEY COORDINATOR
CLD - 133.80 MHz - SYDNEY CLEARANCE DELIVERY	APP - 124.40 MHz - SYDNEY APPROACH
APP - 128.30 MHz - SYDNEY APPROACH	APP - 135.90 MHz - SYDNEY APPROACH
APP - 126.10 MHz - SYDNEY DIRECT	APP - 125.30 MHz - SYDNEY DIRECT
APP - 133.95 MHz - ILS MONITOR	APP - 119.45 MHz - ILS MONITOR
DEP - 129.70 MHz - SYDNEY DEPARTURE	DEP - 128.30 MHz - SYDNEY DEPARTURE
DEP - 123.00 MHz - SYDNEY DEPARTURE	DEP - 118.40 MHz - SYDNEY DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	148 ft	8,018 ft	167.85	ASPHALT	758 ft	295 ft
	45 m	2,444 m	155.18		231 m	90 m
34R	148 ft	8,018 ft	347.85	ASPHALT	125 ft	295 ft
	45 m	2,444 m	335.18		38 m	90 m
07	148 ft	8,285 ft	74.14	ASPHALT	0 ft	489 ft
	45 m	2,525 m	61.46		0 m	149 m
25	148 ft	8,285 ft	254.12	ASPHALT	331 ft	197 ft
	45 m	2,525 m	241.45		101 m	60 m
16R	148 ft	13,029 ft	167.86	ASPHALT	279 ft	299 ft
	45 m	3,971 m	155.19		85 m	91 m
34L	148 ft	13,029 ft	347.85	ASPHALT	0 ft	620 ft
	45 m	3,971 m	335.18		0 m	189 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	DME	ISY	109.90 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
16L	DME	ISS	110.90 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
25	DME	ISW	109.70 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
34R	DME	IKN	109.30 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
07	LOC-ILS	ISY	109.90 MHz	18 nm	74.13	-	21 ft
				33 km	61.46		21 m
16L	LOC-ILS	ISS	110.90 MHz	18 nm	167.85	-	21 ft
				33 km	155.18		21 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16R	LOC-ILS	IKS	109.50 MHz	18 nm	167.86	-	21 ft
				33 km	155.18		21 m
25	LOC-ILS	ISW	109.70 MHz	18 nm	254.13	-	21 ft
				33 km	241.46		21 m
34L	LOC-ILS	ISN	110.10 MHz	18 nm	347.86	-	21 ft
				33 km	335.18		21 m
34R	LOC-ILS	IKN	109.30 MHz	18 nm	347.85	-	21 ft
				33 km	335.18		21 m
07	GS	ISY	109.90 MHz	10 nm	74.13	3.00	21 ft
				19 km	61.46		21 m
16L	GS	ISS	110.90 MHz	10 nm	167.85	3.00	21 ft
				19 km	155.18		21 m
16R	GS	IKS	109.50 MHz	10 nm	167.86	3.00	21 ft
				19 km	155.18		21 m
25	GS	ISW	109.70 MHz	10 nm	254.13	3.00	21 ft
				19 km	241.46		21 m
34L	GS	ISN	110.10 MHz	10 nm	347.86	3.00	21 ft
				19 km	335.18		21 m
34R	GS	IKN	109.30 MHz	10 nm	347.85	3.00	21 ft
				19 km	335.18		21 m

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.435 E

METAR

KLAX 040853Z 34004KT 10SM FEW008 OVC012 16/13 A2985 RMK A02 SLP105 T01610133 56007 \$

TAF

KLAX 040900Z 0409/0512 VRB03KT P6SM OVC012 FM041700 25008KT P6SM BKN022 BKN200 FM041900 26012KT P6SM FEW025 SCT200

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.52		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.53		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m