

# RPLL

Ninoy Aquino Intl


# PGUM

Guam Intl

2024/05/07 1817Z

RPLL JOM **G467** ACRON PGUM

1388.15 nm / 2570.86 km

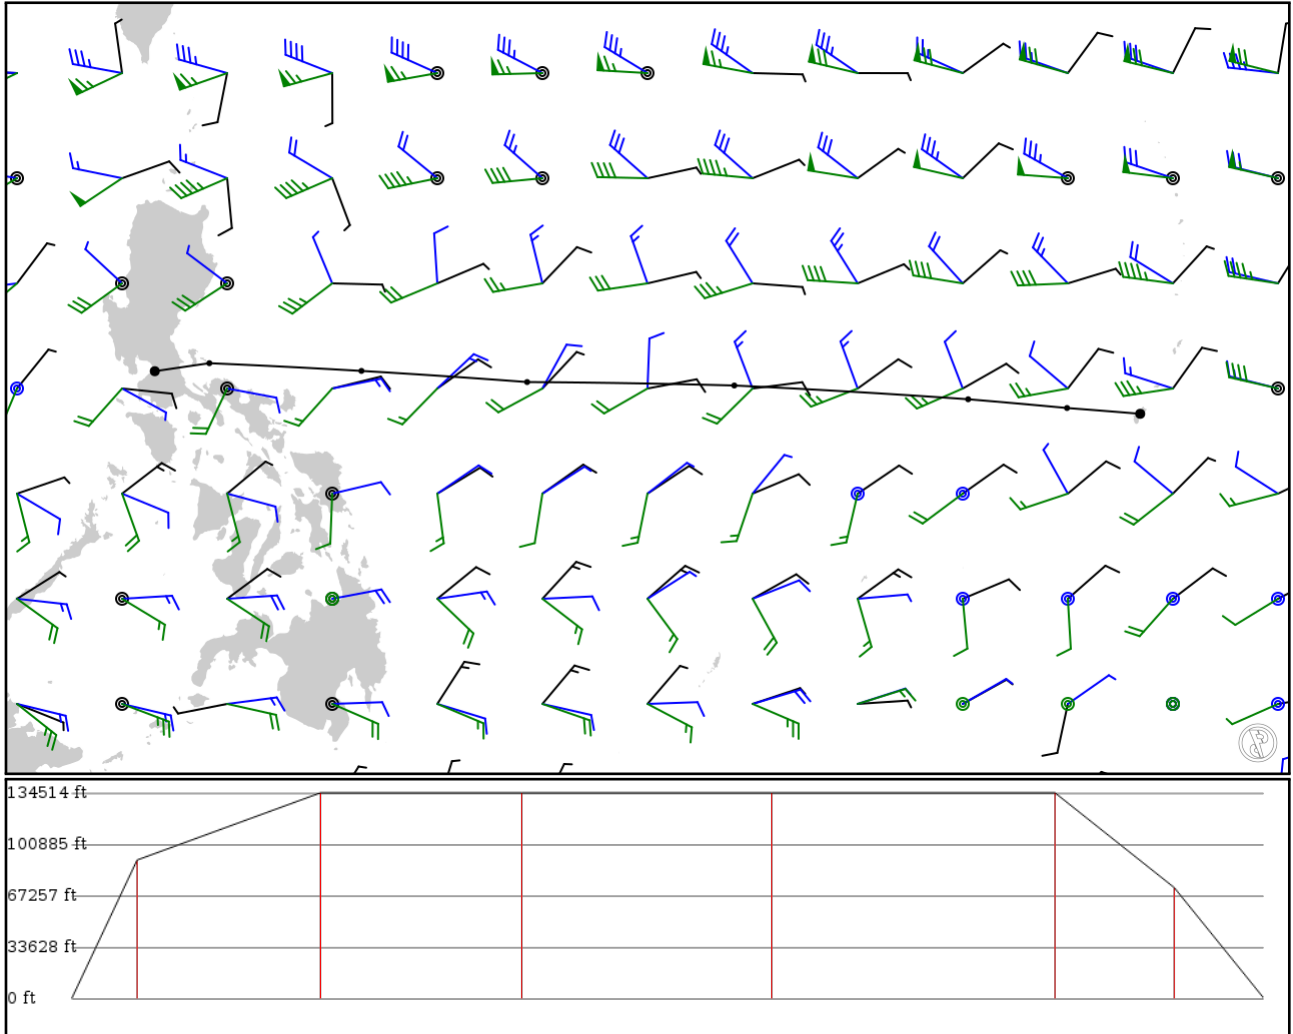

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 41000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RPLL	-	14.51130	0 ft	-	Ninoy Aquino Intl
APT	-	121.01300	0 m		
JOM	-	14.70490	27,600 ft	77	JOMALIG
VOR	-	122.33000	8,412 m		
DILIS	G467	14.51860	41,000 ft	213	-
FIX	AWY-HI	126.00100	12,497 m		
ENDAX	G467	14.25000	41,000 ft	233	-
FIX	AWY-HI	130.00000	12,497 m		
YELLO	G467	14.16670	41,000 ft	291	-
FIX	AWY-HI	135.00000	12,497 m		
KITSS	G467	13.83500	41,000 ft	329	-
FIX	AWY-HI	140.64500	12,497 m		
ACRON	G467	13.62380	22,100 ft	139	-
FIX	AWY-HI	143.03100	6,736 m		
PGUM	-	13.48400	0 ft	103	Guam Intl
APT	-	144.79700	0 m		

## RPLL

Region: PHILIPPINES  
Timezone: ASIA/MANILA  
Runways: 2

Elevation: 75 ft / 23 m  
Location: 14.511300 121.013000  
Magnetic Var: 2.778 W

## METAR

RPLL 071800Z VRB04KT 9999 FEW025 29/24 Q1010 NOSIG RMK A2983

## TAF

TAF RPLL 071700Z 0718/0824 11007KT 9999 FEW025 SCT100 TX36/0806Z TN28/0721Z TEMPO 0805/0811 14008KT FEW023CB SCT0

## Frequencies

REC - 126.40 MHz - ATIS	APP - 119.70 MHz - MANILA APPROACH
APP - 121.10 MHz - MANILA APPROACH	APP - 127.70 MHz - MANILA APPROACH
TWR - 118.10 MHz - MANILA TOWER	GND - 121.80 MHz - MANILA GROUND
GND - 121.70 MHz - MANILA RAMP	GND - 128.80 MHz - MANILA RAMP
GND - 123.25 MHz - MANILA RAMP	GND - 121.35 MHz - MANILA RAMP
CLD - 125.10 MHz - MANILA CLEARANCE DELIVERY	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	197 ft	11,742 ft	60.15	ASPHALT	545 ft	0 ft
	60 m	3,579 m	62.92		166 m	0 m
24	197 ft	11,742 ft	240.15	ASPHALT	0 ft	0 ft
	60 m	3,579 m	242.93		0 m	0 m
13	144 ft	7,729 ft	134.96	ASPHALT	804 ft	0 ft
	44 m	2,356 m	137.74		245 m	0 m
31	144 ft	7,729 ft	314.96	ASPHALT	0 ft	0 ft
	44 m	2,356 m	317.74		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	IML	109.10 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
24	DME	IMA	109.90 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
06	LOC-ILS	IML	109.10 MHz	18 nm	60.15	-	75 ft
				33 km	62.93		75 m
24	LOC-ILS	IMA	109.90 MHz	18 nm	240.15	-	75 ft
				33 km	242.93		75 m
06	GS	IML	109.10 MHz	10 nm	60.15	3.01	75 ft
				19 km	62.93		75 m
24	GS	IMA	109.90 MHz	10 nm	240.15	3.06	75 ft
				19 km	242.93		75 m

## PGUM

Region: USA (GUAM, NORTHERN MARIANA ISLANDS)  
Timezone: PACIFIC/GUAM  
Runways: 2

Elevation: 305 ft / 93 m  
Location: 13.484000 144.797000  
Magnetic Var: 0.310 E

## METAR

PGUM 071754Z 09004KT 10SM FEW021 27/24 A2984 RMK A02 SLP095 T02670239 10278 20256 55007 \$

## TAF

TAF PGUM 071720Z 0718/0824 09007KT P6SM FEW020 FM072300 10011G17KT P6SM VCSH FEW020 SCT040 FM080800 09008KT P6SM V

## Frequencies

REC - 119.00 MHz - ATIS

TWR - 118.10 MHz - AGANA TWR

GND - 121.90 MHz -

APP - 118.70 MHz - APP/DEP

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	150 ft	12,020 ft	64.81	ASPHALT	1,014 ft	397 ft
	46 m	3,664 m	64.50		309 m	121 m
24R	150 ft	12,020 ft	244.82	ASPHALT	0 ft	397 ft
	46 m	3,664 m	244.51		0 m	121 m
06R	151 ft	10,019 ft	64.83	ASPHALT	0 ft	400 ft
	46 m	3,054 m	64.52		0 m	122 m
24L	151 ft	10,019 ft	244.84	ASPHALT	1,010 ft	394 ft
	46 m	3,054 m	244.53		308 m	120 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IGUM	110.30 MHz	18 nm	-	-	317 ft
				33 km	-		317 m
06R	DME	IAWD	110.90 MHz	18 nm	-	-	298 ft
				33 km	-		298 m
06L	LOC-ILS	IGUM	110.30 MHz	18 nm	64.81	-	305 ft
				33 km	64.50		305 m
06R	LOC-ILS	IAWD	110.90 MHz	18 nm	64.82	-	305 ft
				33 km	64.51		305 m
06L	GS	IGUM	110.30 MHz	10 nm	64.81	3.00	305 ft
				19 km	64.50		305 m
06R	GS	IAWD	110.90 MHz	10 nm	64.82	3.00	305 ft
				19 km	64.51		305 m