

KFLL

Fort Lauderdale-Hollywood Intl


MDPC

Punta Cana Intl

2024/05/20 1514Z

KFLL SKIPS **Y586** FORST **Y589** ALBBE **UA636** DATUN **A636** PTA **W28** PIRAL MDPC

800.92 nm / 1483.30 km

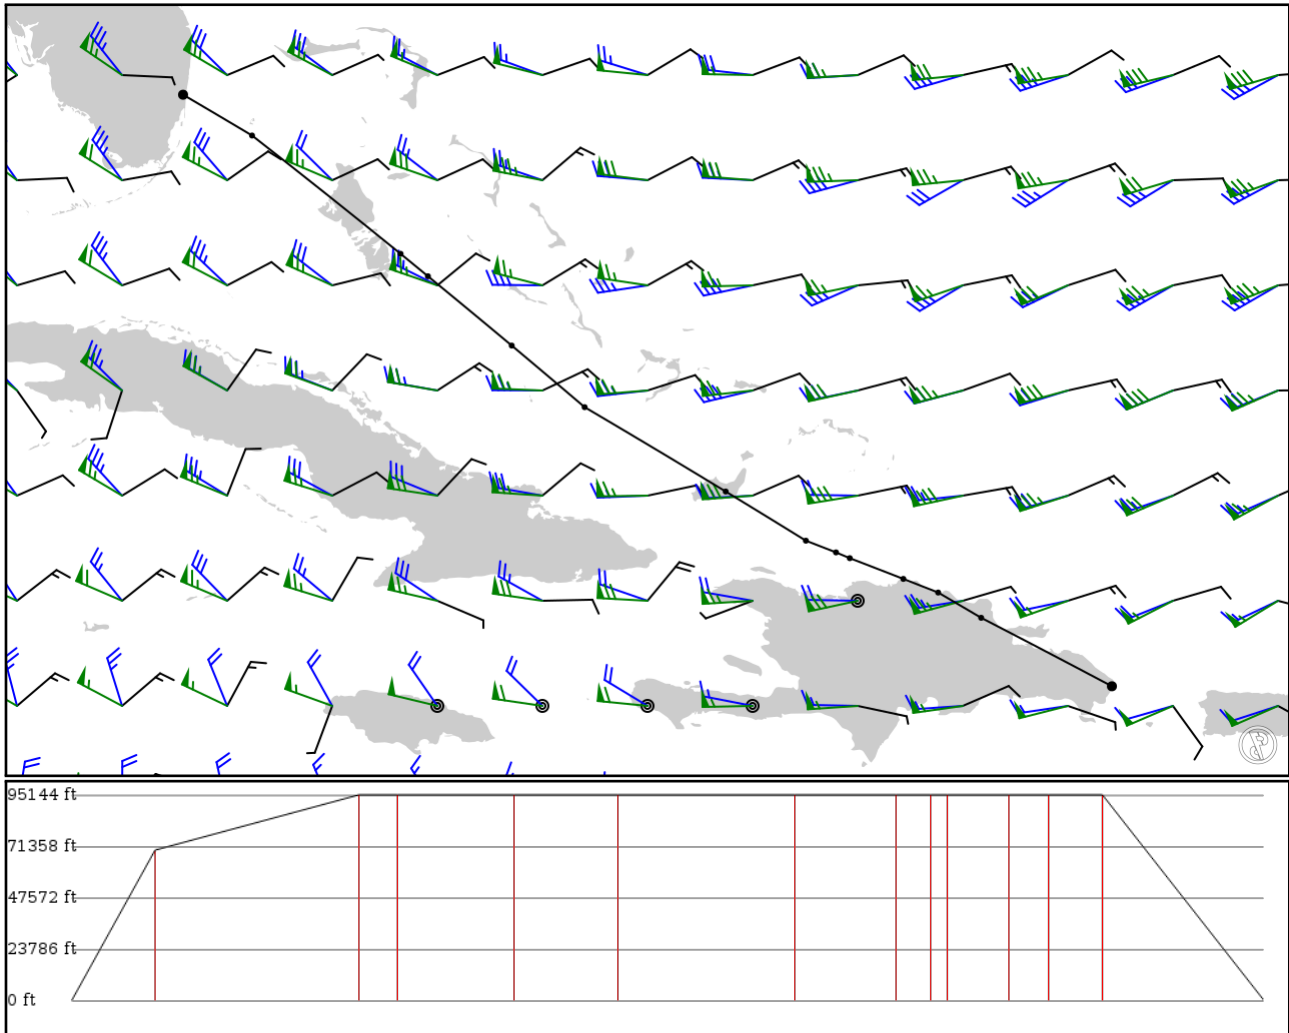

Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 29000ft
- Cruise Speed: 320kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KFLL APT	-	26.07130 -80.14950	0 ft 0 m	-	Fort Lauderdale-Hollywood Intl
SKIPS FIX	-	25.55390 -79.27440	21,200 ft 6,462 m	56	-
RYDEL FIX	Y586 AWY-HI	24.05390 -77.38970	29,000 ft 8,839 m	136	-
KFFER FIX	Y586 AWY-HI	23.76970 -77.04310	29,000 ft 8,839 m	25	-
WSSKY FIX	Y586 AWY-HI	22.89060 -75.98000	29,000 ft 8,839 m	78	-
FORST FIX	Y586 AWY-HI	22.10970 -75.05530	29,000 ft 8,839 m	69	-
SKHOT FIX	Y589 AWY-HI	21.04010 -73.26580	29,000 ft 8,839 m	118	-
ALBBE FIX	Y589 AWY-HI	20.41670 -72.24880	29,000 ft 8,839 m	68	-
TUMAR FIX	UA636 AWY-HI	20.26830 -71.86670	29,000 ft 8,839 m	23	-
RETAK FIX	UA636 AWY-HI	20.19500 -71.69170	29,000 ft 8,839 m	10	-
DATUN FIX	UA636 AWY-HI	19.93220 -71.01250	29,000 ft 8,839 m	41	-
PTA VOR	A636 AWY-LO	19.75920 -70.57060	29,000 ft 8,839 m	27	PUERTO PLATA
PIRAL FIX	W28 AWY-LO	19.43890 -70.02500	29,000 ft 8,839 m	36	-
MDPC APT	-	18.57080 -68.36620	0 ft 0 m	107	Punta Cana Intl

KFLL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 65 ft / 20 m
Location: 26.071300 -80.149500
Magnetic Var: 7.393 W

METAR

KFLL 201453Z 24010KT 10SM FEW030 FEW150 SCT250 31/23 A2989 RMK A02 SLP123 T03110228 51005

TAF

TAF AMD KFLL 201501Z 2015/2118 24008KT P6SM FEW030 SCT050 FM201800 15008KT P6SM VCTS SCT030CB BKN050 FM211500 0900

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m