

SVMI

Caracas Simon Bolivar Intl


MPTO

Tocumen Intl

2024/06/04 0339Z

SVMI KERON W5 YAR W14 BRM UA553 MUBAR MPTO

746.59 nm / 1382.69 km

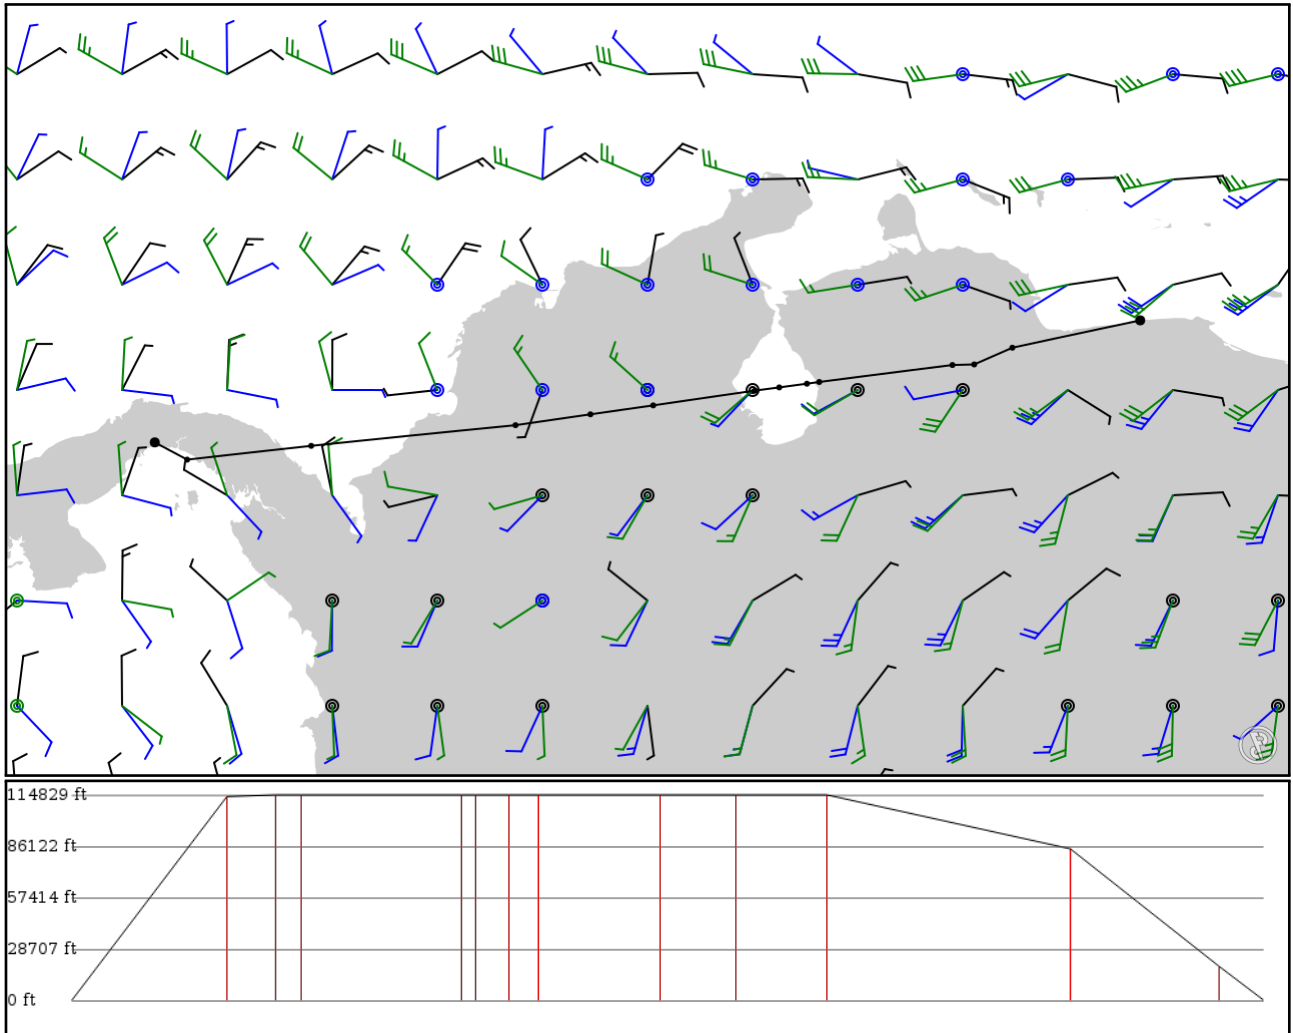

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 26000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
SVMI APT	-	10.60312 -66.99059	0 ft 0 m	-	Caracas Simon Bolivar Intl
KERON FIX	-	10.25981 -68.59847	34,700 ft 10,577 m	97	-
YAR NDB	W5 AWY-LO	10.04975 -69.07842	35,000 ft 10,668 m	31	YARITAGUA NDB
BRM VOR	W14 AWY-LO	10.04253 -69.35197	35,000 ft 10,668 m	16	BARQUISIMETO VOR-DME
BODIS FIX	UA553 AWY-HI	9.82975 -71.02703	35,000 ft 10,668 m	99	-
IROSA FIX	UA553 AWY-HI	9.80808 -71.18203	35,000 ft 10,668 m	9	-
EKERI FIX	UA553 AWY-HI	9.76142 -71.53036	35,000 ft 10,668 m	20	-
DALEX FIX	UA553 AWY-HI	9.72142 -71.83536	35,000 ft 10,668 m	18	-
SIDOS FIX	UA553 AWY-HI	9.53583 -73.11528	35,000 ft 10,668 m	76	-
UGOTA FIX	UA553 AWY-HI	9.42361 -73.90472	35,000 ft 10,668 m	47	-
MGN VOR	UA553 AWY-HI	9.28722 -74.84694	35,000 ft 10,668 m	56	MAGANGUE VOR-DME
ESEDA FIX	UA553 AWY-HI	9.02797 -77.41642	25,800 ft 7,864 m	153	-
MUBAR FIX	UA553 AWY-HI	8.85481 -78.97678	5,800 ft 1,768 m	93	-
MPTO APT	-	9.07136 -79.38346	0 ft 0 m	27	Tocumen Intl

SVMI

Region: VENEZUELA
Timezone: AMERICA/CARACAS
Runways: 2

Elevation: 234 ft / 71 m
Location: 10.603200 -66.990400
Magnetic Var: 12.878 W

METAR

SVMI 040200Z 11003KT 9999 FEW016 SCT100 26/24 Q1012

TAF

TAF SVMI 032200Z 0400/0500 18005KT 9999 SCT015 SCT080 TX27/0304Z TN25/0307Z BECMG 0403/0407 11004KT 9999 SCT016 S

Frequencies

CLD - 119.50 MHz - CLEARANCE DELIVERY
TWR - 118.40 MHz - MAIQUETIA TOWER
DEP - 120.10 MHz - MAIQUETIA DEPARTURE
GND - 121.90 MHz - MAIQUETIA GROUND
APP - 120.40 MHz - MAIQUETIA APPROACH
REC - 132.85 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	151 ft	11,494 ft	88.13	ASPHALT	0 ft	187 ft
	46 m	3,503 m	101.00		0 m	57 m
28	151 ft	11,494 ft	268.13	ASPHALT	0 ft	187 ft
	46 m	3,503 m	281.01		0 m	57 m
09	151 ft	9,523 ft	75.94	ASPHALT	0 ft	0 ft
	46 m	2,903 m	88.82		0 m	0 m
27	151 ft	9,523 ft	255.95	ASPHALT	0 ft	0 ft
	46 m	2,903 m	268.83		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	DME	IMIQ	110.10 MHz	18 nm	-	-	235 ft
				33 km	-		235 m
10	LOC-ILS	IMIQ	110.10 MHz	18 nm	87.90	-	235 ft
				33 km	100.78		235 m
10	GS	IMIQ	110.10 MHz	10 nm	88.29	3.00	235 ft
				19 km	101.16		235 m

MPTO

Region: PANAMA

Timezone: AMERICA/PANAMA

Runways: 2

Elevation: 134 ft / 41 m

Location: 9.071400 -79.383500

Magnetic Var: 5.462 W

METAR

MPTO 040300Z 00000KT 9999 SCT016 SCT090 26/25 Q1010 NOSIG

TAF

TAF MPTO 032300Z 0400/0506 18007KT 9999 SCT018 SCT090 TEMPO 0402/0406 30005KT TEMPO 0407/0409 VRB02KT 6000 RA PROB

Frequencies

REC - 127.70 MHz - ATIS

GND - 121.90 MHz - TOCUMEN GROUND

CLD - 129.80 MHz - CLEARANCE DELIVERY

APP - 123.30 MHz - PANAMA APPROACH

APP - 119.20 MHz - PANAMA APPROACH

TWR - 118.10 MHz - TOCUMEN TOWER

GND - 112.05 MHz - TOCUMEN GROUND

APP - 121.20 MHz - PANAMA APPROACH

APP - 119.70 MHz - PANAMA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03R	148 ft	10,049 ft	29.33	CONCRETE	0 ft	0 ft
	45 m	3,063 m	34.79		0 m	0 m
21L	148 ft	10,049 ft	209.33	CONCRETE	0 ft	0 ft
	45 m	3,063 m	214.79		0 m	0 m
03L	148 ft	8,832 ft	30.67	ASPHALT	814 ft	0 ft
	45 m	2,692 m	36.13		248 m	0 m
21R	148 ft	8,832 ft	210.67	ASPHALT	0 ft	0 ft
	45 m	2,692 m	216.14		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03R	DME	INAT	110.70 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
03R	LOC-ILS	INAT	110.70 MHz	18 nm	29.33	-	134 ft
				33 km	34.79		134 m
03R	GS	INAT	110.70 MHz	10 nm	29.33	3.00	134 ft
				19 km	34.79		134 m