

WIDD

Batam Hang Nadim


WIII

Jakarta Soekarno-Hatta Intl

2024/05/02 2042Z

WIDD NE **B469** BIKAL WIII

463.10 nm / 857.65 km

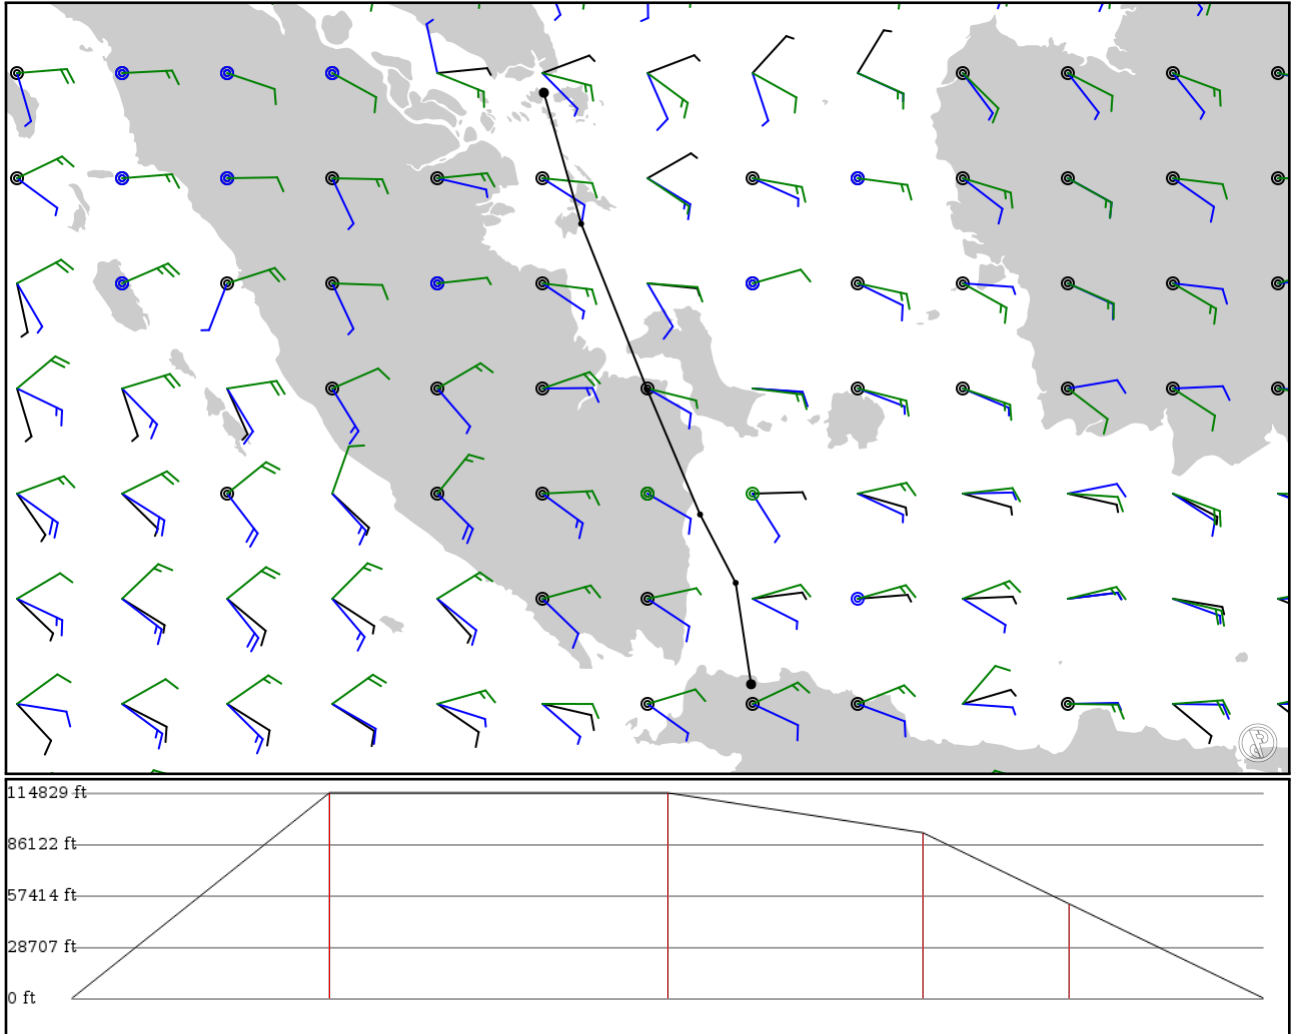

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
WIDD	-	1.12095	0 ft	-	Batam Hang Nadim
APT	-	104.11900	0 m		
NE	-	-0.48300	35,000 ft	100	SINGKEP
NDB	-	104.57600	10,668 m		
TODAK	B469	-2.52186	35,000 ft	131	-
FIX	AWY-HI	105.38800	10,668 m		
BIDAK	B469	-4.04127	28,200 ft	99	-
FIX	AWY-HI	106.03200	8,595 m		
BIKAL	B469	-4.87884	16,100 ft	56	-
FIX	AWY-HI	106.46800	4,907 m		
WIII	-	-6.11981	0 ft	75	Jakarta Soekarno-Hatta Intl
APT	-	106.65700	0 m		

WIDD

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 1

Elevation: 123 ft / 37 m
Location: 1.120950 104.119000
Magnetic Var: 0.213 E

METAR

WIDD 022000Z 00000KT 9999 FEW014 27/26 Q1008 NOSIG

TAF

TAF WIDD 021700Z 0218/0318 17004KT 9999 FEW014 ? PROB30 TEMPO 0220/0222 5000 TSRA FEW013CB

Frequencies

REC - 126.25 MHz - ATIS	GND - 121.95 MHz - HANG NADIM GROUND
TWR - 118.30 MHz - HANG NADIM TOWER	TWR - 118.70 MHz - HANG NADIM TOWER
APP - 130.20 MHz - TANJUNG PINANG APPROACH	APP - 120.30 MHz - SINGAPORE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	148 ft	13,258 ft	41.35	ASPHALT	0 ft	207 ft
	45 m	4,041 m	41.14		0 m	63 m
22	148 ft	13,258 ft	221.35	ASPHALT	0 ft	190 ft
	45 m	4,041 m	221.14		0 m	58 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	IBTM	110.10 MHz	18 nm	-	-	69 ft
				33 km	-		69 m
04	LOC-ILS	IBTM	110.10 MHz	18 nm	41.35	-	123 ft
				33 km	41.14		123 m
04	GS	IBTM	110.10 MHz	10 nm	41.35	3.00	123 ft
				19 km	41.14		123 m

WIII

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 3

Elevation: 34 ft / 10 m
Location: -6.119810 106.657000
Magnetic Var: 0.530 E

METAR

WIII 022030Z 20003KT 5000 HZ FEW020 27/25 Q1007 NOSIG

TAF

TAF WIII 021700Z 0218/0400 04005KT 8000 SCT020 BECMG 0219/0220 22005KT 5000 HZ BECMG 0300/0302 05010KT 9000 NSW TEMPO 0300/0302 05010KT 9000 NSW

Frequencies

REC - 126.85 MHz - ATIS	CLD - 121.95 MHz -
CLD - 124.25 MHz -	SOEKARNO-HATTA CLEARANCE DELIVERY
SOEKARNO-HATTA CLEARANCE DELIVERY	CLD - 125.15 MHz -
GND - 121.60 MHz - SOEKARNO-HATTA GROUND	SOEKARNO-HATTA CLEARANCE DELIVERY
GND - 128.85 MHz - SOEKARNO-HATTA GROUND	GND - 121.00 MHz - SOEKARNO-HATTA GROUND
TWR - 118.20 MHz - SOEKARNO-HATTA TOWER	GND - 128.95 MHz - SOEKARNO-HATTA GROUND
TWR - 119.30 MHz - SOEKARNO-HATTA TOWER	TWR - 118.75 MHz - SOEKARNO-HATTA TOWER
APP - 124.20 MHz - JAKARTA ARRIVAL	TWR - 120.25 MHz - SOEKARNO-HATTA TOWER
APP - 119.75 MHz - JAKARTA DIRECTOR	APP - 125.45 MHz - JAKARTA ARRIVAL
APP - 124.55 MHz - JAKARTA DIRECTOR	APP - 123.75 MHz - JAKARTA DIRECTOR
APP - 125.05 MHz - JAKARTA DIRECTOR	APP - 124.95 MHz - JAKARTA DIRECTOR
APP - 124.15 MHz - JAKARTA RADAR	APP - 127.90 MHz - JAKARTA DIRECTOR
APP - 125.35 MHz - JAKARTA RADAR	APP - 124.35 MHz - JAKARTA RADAR
APP - 127.95 MHz - JAKARTA RADAR	APP - 126.45 MHz - JAKARTA RADAR
	APP - 130.10 MHz - JAKARTA RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	150 ft	8,202 ft	68.13	ASPHALT	328 ft	846 ft
	46 m	2,500 m	67.61		100 m	258 m
24	150 ft	8,202 ft	248.13	ASPHALT	0 ft	0 ft
	46 m	2,500 m	247.60		0 m	0 m
07L	197 ft	11,820 ft	68.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	67.62		0 m	0 m
25R	197 ft	11,820 ft	248.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	247.62		0 m	0 m
07R	197 ft	12,015 ft	68.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	67.59		0 m	0 m
25L	197 ft	12,015 ft	248.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	247.59		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	LOC-ILS	ICHL	111.50 MHz	18 nm	68.13	-	21 ft
				33 km	67.60		21 m
07R	LOC-ILS	ICHR	110.50 MHz	18 nm	68.13	-	27 ft
				33 km	67.60		27 m
25L	LOC-ILS	ICGL	111.10 MHz	18 nm	248.12	-	34 ft
				33 km	247.59		34 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	LOC-ILS	ICGR	110.90 MHz	18 nm	248.13	-	29 ft
				33 km	247.60		29 m
07L	GS	ICHL	111.50 MHz	10 nm	68.25	3.00	29 ft
				19 km	67.72		29 m
07R	GS	ICHR	110.50 MHz	10 nm	68.24	3.00	34 ft
				19 km	67.71		34 m
25L	GS	ICGL	111.10 MHz	10 nm	248.24	3.00	27 ft
				19 km	247.71		27 m
25R	GS	ICGR	110.90 MHz	10 nm	248.25	3.00	21 ft
				19 km	247.72		21 m