

KSLC

Salt Lake City Intl


KLAX

Los Angeles Intl

2024/05/13 1822Z

KSLC DTA **V21** MLF **J107** NORRA **J100** DAG **V394** BASAL KLAX

532.30 nm / 985.81 km

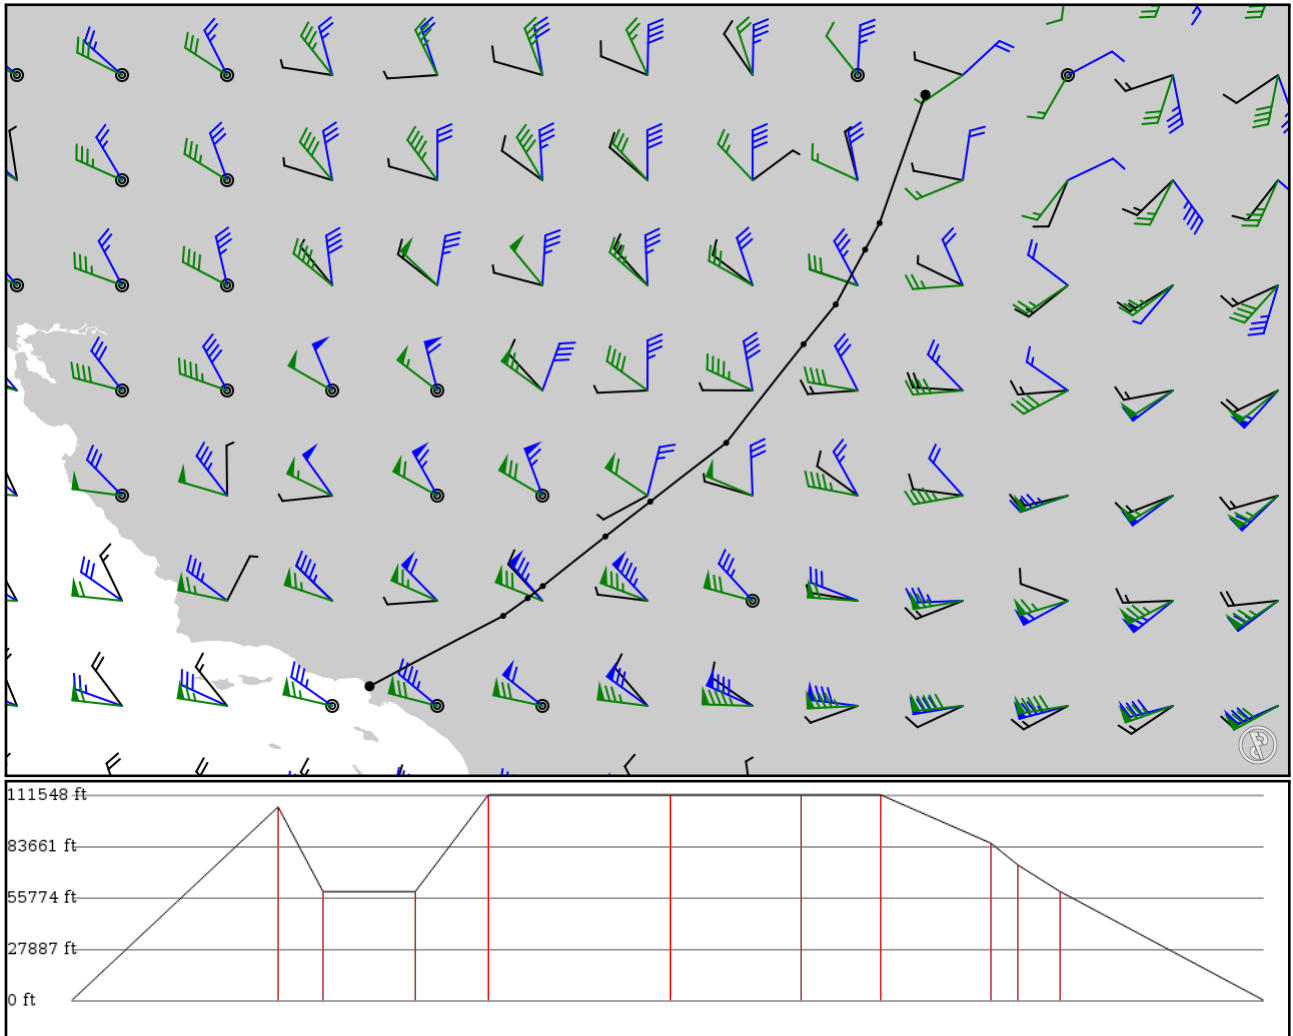

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSLC APT	-	40.78697 -111.97543	0 ft 0 m	-	Salt Lake City Intl
DTA VOR	-	39.30222 -112.50556	32,000 ft 9,754 m	92	DELTA VORTAC
ZIBRA FIX	V21 AWY-LO	38.99513 -112.67275	18,000 ft 5,486 m	20	-
MLF VOR	V21 AWY-LO	38.36036 -113.01322	18,000 ft 5,486 m	41	MILFORD VORTAC
BERYL FIX	J107 AWY-HI	37.90005 -113.38572	34,000 ft 10,363 m	32	-
NORRA FIX	J107 AWY-HI	36.75931 -114.28109	34,000 ft 10,363 m	80	-
LAS DME	J100 AWY-HI	36.07970 -115.15979	34,000 ft 10,363 m	58	LAS VEGAS VORTAC
CLARR FIX	J100 AWY-HI	35.67568 -115.67975	34,000 ft 10,363 m	35	-
MISEN FIX	J100 AWY-HI	35.10235 -116.40385	26,000 ft 7,925 m	49	-
DAG VOR	J100 AWY-HI	34.96244 -116.57817	22,400 ft 6,828 m	12	DAGGETT VORTAC
BASAL FIX	V394 AWY-LO	34.75778 -116.86183	18,000 ft 5,486 m	18	-
KLAX APT	-	33.94313 -118.40892	0 ft 0 m	90	Los Angeles Intl

KSLC

Region: UNITED STATES

Timezone: AMERICA/DENVER

Runways: 4

Elevation: 4,227 ft / 1,288 m

Location: 40.787000 -111.975000

Magnetic Var: 10.770 E

METAR

KSLC 131754Z 17008KT 10SM FEW095 SCT140 SCT230 25/02 A2997 RMK A02 SLP104 CB DSNT NW ACC DSNT NE-E T02500017 10250

TAF

TAF KSLC 131720Z 1318/1424 15009KT P6SM FEW120 FM131900 32008KT P6SM SCT120 BKN150 FM140300 34006KT P6SM VCSH SCT

Frequencies

REC - 124.75 MHz - ATIS

COM - 122.95 MHz - UNICOM

GND - 121.90 MHz -

TWR - 118.30 MHz -

TWR - 132.65 MHz -

APP - 124.30 MHz - APP/DEP

APP - 126.25 MHz - APP/DEP

REC - 127.62 MHz - ATIS

CLD - 127.30 MHz - CLNC DEL

GND - 133.65 MHz -

TWR - 119.05 MHz -

APP - 121.10 MHz - APP/DEP

APP - 124.90 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	12,013 ft	174.97	ASPHALT	0 ft	394 ft
	46 m	3,662 m	164.20		0 m	120 m
34R	151 ft	12,013 ft	354.98	ASPHALT	0 ft	400 ft
	46 m	3,662 m	344.21		0 m	122 m
16R	151 ft	12,013 ft	174.97	CONCRETE	0 ft	400 ft
	46 m	3,662 m	164.20		0 m	122 m
34L	151 ft	12,013 ft	354.97	CONCRETE	0 ft	400 ft
	46 m	3,662 m	344.20		0 m	122 m
17	151 ft	9,606 ft	179.99	ASPHALT	0 ft	102 ft
	46 m	2,928 m	169.22		0 m	31 m
35	151 ft	9,606 ft	359.99	ASPHALT	335 ft	312 ft
	46 m	2,928 m	349.22		102 m	95 m
14	151 ft	4,896 ft	153.08	ASPHALT	0 ft	0 ft
	46 m	1,492 m	142.31		0 m	0 m
32	151 ft	4,896 ft	333.09	ASPHALT	0 ft	0 ft
	46 m	1,492 m	322.32		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	DME	IMOY	109.50 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m
16R	DME	IUAT	111.90 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m
17	DME	IBNT	111.50 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m
34L	DME	IUUH	111.90 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m
34R	DME	ISLC	109.50 MHz	18 nm	-	-	4,227 ft
				33 km	-		4,227 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16L	LOC-ILS	IMOY	109.50 MHz	18 nm 33 km	174.98 164.21	-	4,227 ft 4,227 m
16R	LOC-ILS	IUAT	111.90 MHz	18 nm 33 km	174.97 164.20	-	4,227 ft 4,227 m
17	LOC-ILS	IBNT	111.50 MHz	18 nm 33 km	179.99 169.22	-	4,227 ft 4,227 m
34L	LOC-ILS	IUUH	111.90 MHz	18 nm 33 km	354.97 344.20	-	4,227 ft 4,227 m
34R	LOC-ILS	ISLC	109.50 MHz	18 nm 33 km	354.98 344.21	-	4,227 ft 4,227 m
35	LOC-ILS	IUTJ	111.50 MHz	18 nm 33 km	359.99 349.22	-	4,227 ft 4,227 m
16L	GS	IMOY	109.50 MHz	10 nm 19 km	174.98 164.21	3.00	4,227 ft 4,227 m
16R	GS	IUAT	111.90 MHz	10 nm 19 km	174.97 164.20	3.00	4,227 ft 4,227 m
17	GS	IBNT	111.50 MHz	10 nm 19 km	179.99 169.22	3.00	4,227 ft 4,227 m
34L	GS	IUUH	111.90 MHz	10 nm 19 km	354.97 344.20	3.00	4,227 ft 4,227 m
34R	GS	ISLC	109.50 MHz	10 nm 19 km	354.98 344.21	3.00	4,227 ft 4,227 m
35	GS	IUTJ	111.50 MHz	10 nm 19 km	359.99 349.22	3.00	4,227 ft 4,227 m

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.440 E

METAR

KLAX 131753Z 27008KT 7SM OVC017 16/13 A2998 RMK A02 SLP150 T01610128 10161 20139 53001

TAF

KLAX 131741Z 1318/1424 VRB03KT P6SM OVC015 FM131900 25008KT P6SM BKN015 FM132100 26012KT P6SM BKN015 FM140700 VRB

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.51		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.52		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m