

LFPG

Paris Charles De Gaulle


EDDF

Frankfurt

2024/05/08 0017Z

LFPG MMD **Z110** LIMGO EDDF

241.25 nm / 446.80 km

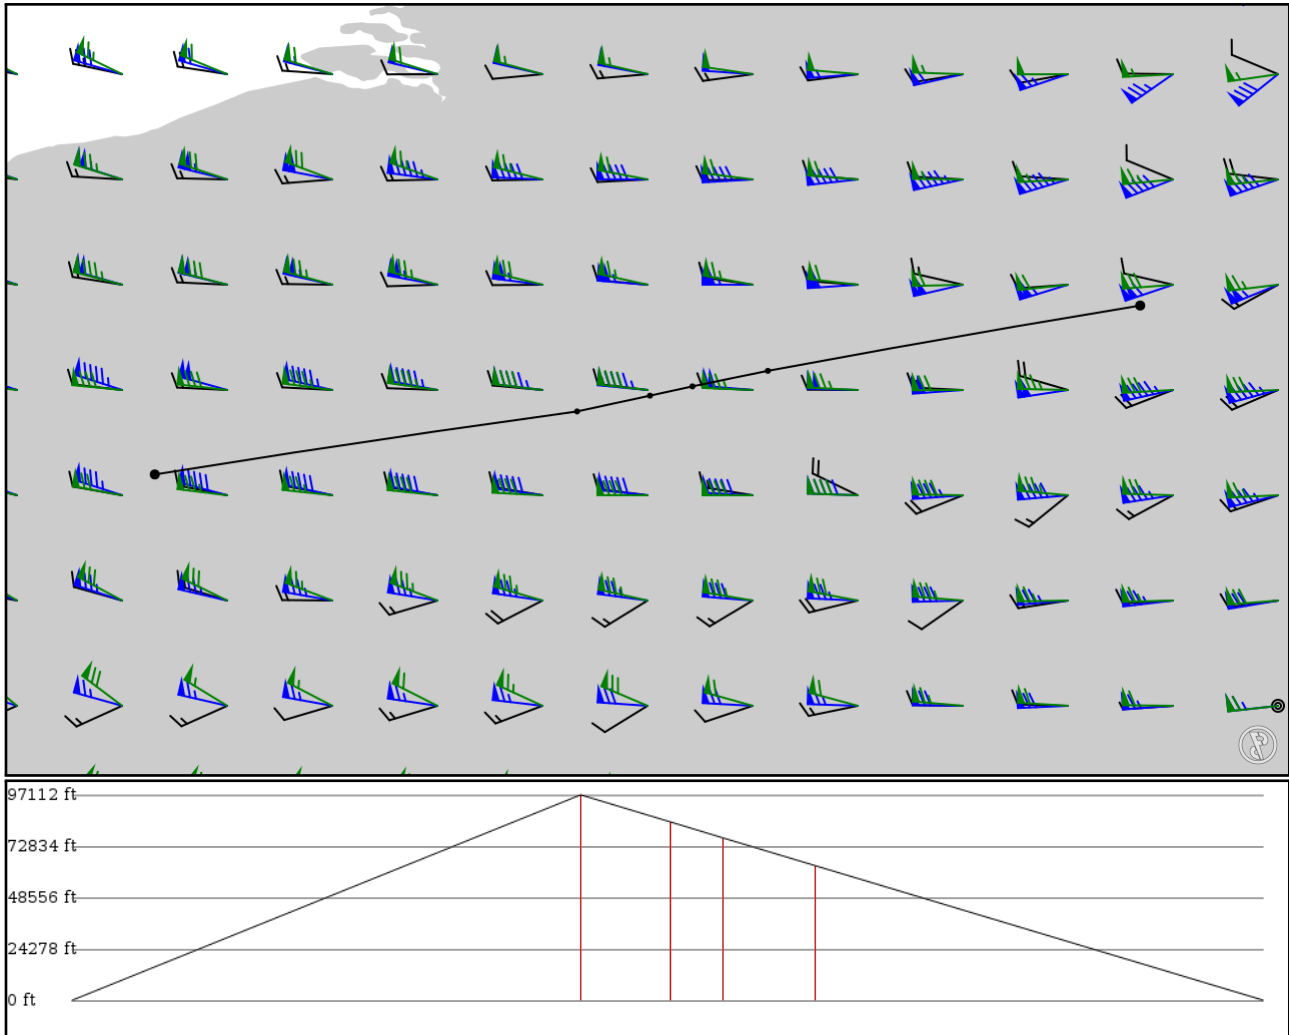

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFPG APT	-	49.00970 2.56257	0 ft 0 m	-	Paris Charles De Gaulle
MMD VOR	-	49.39130 5.12442	29,600 ft 9,022 m	103	MONTMEDY
VAVOT FIX	Z110 AWY-LO	49.48690 5.56667	25,700 ft 7,833 m	18	-
FIR63 FIX	Z110 AWY-LO	49.54310 5.82417	23,400 ft 7,132 m	10	-
LIMGO FIX	Z110 AWY-LO	49.63720 6.28167	19,400 ft 5,913 m	18	-
EDDF APT	-	50.03260 8.54067	0 ft 0 m	90	Frankfurt

LFPG

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 4

Elevation: 392 ft / 119 m
Location: 49.009700 2.562570
Magnetic Var: 1.494 E

METAR

LFPG 080000Z 01007KT 340V110 CAVOK 11/07 Q1025 NOSIG

TAF

TAF LFPG 072300Z 0800/0906 01010KT CAVOK TX18/0815Z TN09/0805Z PROB40 TEMPO 0804/0808 BKN006 PROB30 TEMPO 0804/0808

Frequencies

REC - 128.32 MHz - ATIS	REC - 127.12 MHz - ATIS
TWR - 120.90 MHz - DE GAULLE TOWER	TWR - 125.32 MHz - DE GAULLE TOWER
TWR - 119.62 MHz - DE GAULLE TOWER	TWR - 119.25 MHz - DE GAULLE TOWER
TWR - 118.65 MHz - DE GAULLE TOWER	TWR - 123.60 MHz - DE GAULLE TOWER
TWR - 120.65 MHz - DE GAULLE TOWER	GND - 121.90 MHz - DE GAULLE GROUND
GND - 125.30 MHz - DE GAULLE GROUND	GND - 121.70 MHz - DE GAULLE GROUND
CLD - 121.80 MHz - CLEARANCE DELIVERY	APP - 118.15 MHz - DE GAULLE APPROACH
APP - 119.85 MHz - DE GAULLE APPROACH	APP - 121.15 MHz - DE GAULLE APPROACH
APP - 125.82 MHz - DE GAULLE APPROACH	APP - 126.42 MHz - DE GAULLE APPROACH
DEP - 124.35 MHz - DE GAULLE DEPARTURE	DEP - 126.57 MHz - DE GAULLE DEPARTURE
DEP - 131.20 MHz - DE GAULLE DEPARTURE	DEP - 133.37 MHz - DE GAULLE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	148 ft	13,713 ft	85.31	ASPHALT	0 ft	489 ft
	45 m	4,180 m	83.81		0 m	149 m
26R	148 ft	13,713 ft	265.35	ASPHALT	1,877 ft	279 ft
	45 m	4,180 m	263.86		572 m	85 m
09L	197 ft	8,866 ft	85.32	ASPHALT	0 ft	0 ft
	60 m	2,703 m	83.82		0 m	0 m
27R	197 ft	8,866 ft	265.35	ASPHALT	0 ft	0 ft
	60 m	2,703 m	263.85		0 m	0 m
08R	197 ft	8,833 ft	85.33	ASPHALT	0 ft	489 ft
	60 m	2,692 m	83.83		0 m	149 m
26L	197 ft	8,833 ft	265.35	ASPHALT	0 ft	486 ft
	60 m	2,692 m	263.86		0 m	148 m
09R	148 ft	13,746 ft	85.30	ASPHALT	0 ft	0 ft
	45 m	4,190 m	83.80		0 m	0 m
27L	148 ft	13,746 ft	265.34	ASPHALT	1,959 ft	0 ft
	45 m	4,190 m	263.85		597 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	DSE	108.55 MHz	18 nm	-	-	358 ft
				33 km	-		358 m
09L	DME	PNE	109.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
09R	DME	CGE	110.10 MHz	18 nm	-	-	392 ft
				33 km	-		392 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	DME	DSU	108.35 MHz	18 nm	-	-	338 ft
				33 km	-		338 m
27L	DME	CGW	110.70 MHz	18 nm	-	-	407 ft
				33 km	-		407 m
27R	DME	PNW	110.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
08L	LOC-ILS	GLE	108.70 MHz	18 nm	85.33	-	392 ft
				33 km	83.84		392 m
08R	LOC-ILS	DSE	108.55 MHz	18 nm	85.34	-	392 ft
				33 km	83.85		392 m
09L	LOC-ILS	PNE	109.35 MHz	18 nm	85.33	-	392 ft
				33 km	83.84		392 m
09R	LOC-ILS	CGE	110.10 MHz	18 nm	85.32	-	392 ft
				33 km	83.83		392 m
26L	LOC-ILS	DSU	108.35 MHz	18 nm	265.34	-	392 ft
				33 km	263.85		392 m
26R	LOC-ILS	GAU	111.95 MHz	18 nm	265.33	-	392 ft
				33 km	263.84		392 m
27L	LOC-ILS	CGW	110.70 MHz	18 nm	265.32	-	392 ft
				33 km	263.83		392 m
27R	LOC-ILS	PNW	110.35 MHz	18 nm	265.33	-	392 ft
				33 km	263.84		392 m
08L	GS	GLE	108.70 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.84		392 m
08R	GS	DSE	108.55 MHz	10 nm	85.34	3.00	392 ft
				19 km	83.85		392 m
09L	GS	PNE	109.35 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.84		392 m
09R	GS	CGE	110.10 MHz	10 nm	85.32	3.00	392 ft
				19 km	83.83		392 m
26L	GS	DSU	108.35 MHz	10 nm	265.34	3.00	392 ft
				19 km	263.85		392 m
26R	GS	GAU	111.95 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.84		392 m
27L	GS	CGW	110.70 MHz	10 nm	265.32	3.00	392 ft
				19 km	263.83		392 m
27R	GS	PNW	110.35 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.84		392 m

EDDF

Region: GERMANY - CIVIL
Timezone: EUROPE/BERLIN
Runways: 4

Elevation: 362 ft / 110 m
Location: 50.032600 8.540670
Magnetic Var: 3.172 E

METAR

EDDF 072350Z AUTO 01007KT CAVOK 12/09 Q1021 NOSIG

TAF

TAF EDDF 072300Z 0800/0906 02008KT CAVOK= TAF EDDL 072300Z 0800/0906 35006KT CAVOK BECMG 0801/0804 BKN007 TEMPO 0805/0808 BKN007

Frequencies

REC - 118.02 MHz - ATIS ARRIVAL
GND - 121.80 MHz - GROUND
GND - 121.70 MHz - APRON RAMP/TAXI
GND - 121.85 MHz - APRON RAMP/TAXI
TWR - 118.77 MHz - TOWER
TWR - 124.85 MHz - TOWER
TWR - 136.50 MHz - TOWER
APP - 127.27 MHz - FRANKFURT DIRECT
APP - 125.35 MHz - LANGEN RADAR
APP - 120.80 MHz - LANGEN RADAR
APP - 136.12 MHz - LANGEN RADAR

REC - 118.72 MHz - ATIS DEPARTURE
GND - 121.65 MHz - APRON RAMP/TAXI
GND - 121.95 MHz - APRON RAMP/TAXI
GND - 121.75 MHz - APRON RAMP/TAXI
TWR - 119.90 MHz - TOWER
TWR - 127.32 MHz - TOWER
CLD - 121.90 MHz - CLEARANCE DELIVERY
APP - 118.50 MHz - FRANKFURT DIRECT
APP - 126.55 MHz - LANGEN RADAR
APP - 120.15 MHz - LANGEN RADAR
APP - 119.02 MHz - LANGEN RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	148 ft	9,194 ft	69.56	CONCRETE	0 ft	0 ft
	45 m	2,802 m	66.39		0 m	0 m
25R	148 ft	9,194 ft	249.59	CONCRETE	0 ft	0 ft
	45 m	2,802 m	246.42		0 m	0 m
07C	197 ft	13,134 ft	69.57	ASPHALT	0 ft	203 ft
	60 m	4,003 m	66.40		0 m	62 m
25C	197 ft	13,134 ft	249.61	ASPHALT	0 ft	935 ft
	60 m	4,003 m	246.44		0 m	285 m
07R	148 ft	13,134 ft	69.59	ASPHALT	0 ft	213 ft
	45 m	4,003 m	66.41		0 m	65 m
25L	148 ft	13,134 ft	249.63	ASPHALT	0 ft	1,775 ft
	45 m	4,003 m	246.45		0 m	541 m
18	148 ft	13,083 ft	179.64	ASPHALT	0 ft	0 ft
	45 m	3,988 m	176.47		0 m	0 m
36	148 ft	13,083 ft	359.64	ASPHALT	0 ft	121 ft
	45 m	3,988 m	356.47		0 m	37 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IFNE	111.75 MHz	18 nm	-	-	357 ft
				33 km	-		357 m
25C	DME	IFCW	111.55 MHz	18 nm	-	-	364 ft
				33 km	-		364 m
25R	DME	IFNW	111.35 MHz	18 nm	-	-	357 ft
				33 km	-		357 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07C	LOC-ILS	IFCE	110.55 MHz	18 nm	69.59	-	362 ft
				33 km	66.42		362 m
07L	LOC-ILS	IFNE	111.75 MHz	18 nm	69.58	-	362 ft
				33 km	66.41		362 m
07R	LOC-ILS	IFSE	110.95 MHz	18 nm	69.61	-	362 ft
				33 km	66.44		362 m
25C	LOC-ILS	IFCW	111.55 MHz	18 nm	249.59	-	362 ft
				33 km	246.42		362 m
25L	LOC-ILS	IFSW	111.15 MHz	18 nm	249.61	-	362 ft
				33 km	246.44		362 m
25R	LOC-ILS	IFNW	111.35 MHz	18 nm	249.58	-	362 ft
				33 km	246.41		362 m
07C	GS	IFCE	110.55 MHz	10 nm	69.59	3.00	362 ft
				19 km	66.42		362 m
07L	GS	IFNE	111.75 MHz	10 nm	69.58	3.00	362 ft
				19 km	66.41		362 m
07R	GS	IFSE	110.95 MHz	10 nm	69.61	3.00	362 ft
				19 km	66.44		362 m
25C	GS	IFCW	111.55 MHz	10 nm	249.59	3.00	362 ft
				19 km	246.42		362 m
25L	GS	IFSW	111.15 MHz	10 nm	249.61	3.00	362 ft
				19 km	246.44		362 m
25R	GS	IFNW	111.35 MHz	10 nm	249.58	3.00	362 ft
				19 km	246.41		362 m