


2024/05/18 0311Z

RJOB CUE **Y88** SENJO RJTT

298.76 nm / 553.30 km

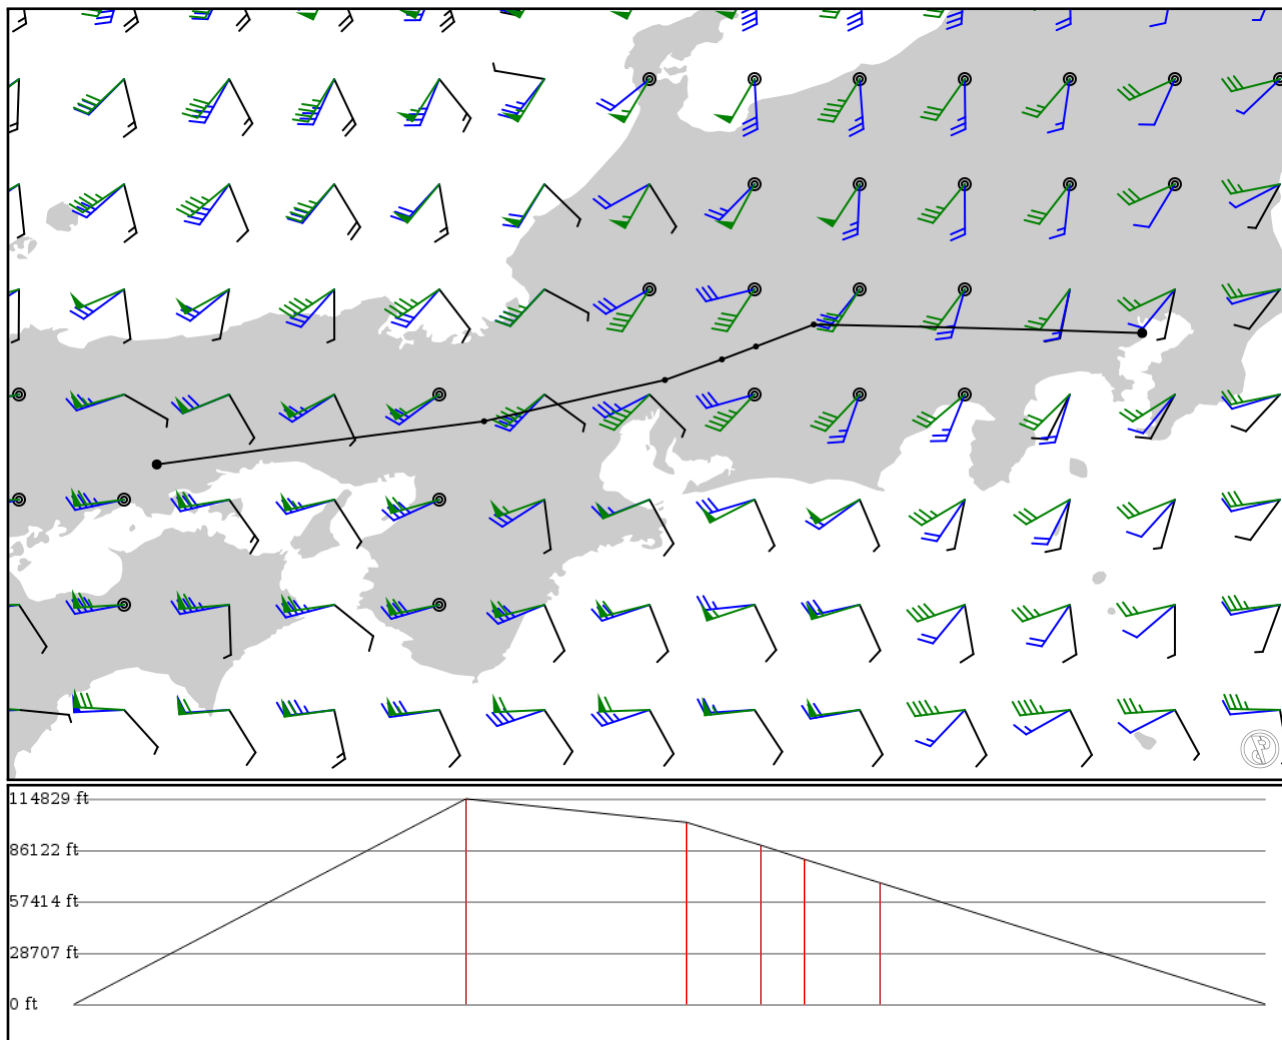

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJOB	-	34.75690	0 ft	-	Okayama
APT	-	133.85500	0 m		
CUE	-	35.01700	35,000 ft	98	OTSU
VOR	-	135.82600	10,668 m		
KCC	Y88	35.26530	31,000 ft	55	NAGOYA
VOR	AWY-HI	136.91500	9,449 m		
SWING	Y88	35.38940	27,100 ft	18	-
FIX	AWY-HI	137.25800	8,260 m		
NAKTU	Y88	35.46710	24,700 ft	11	-
FIX	AWY-HI	137.46300	7,529 m		
SENJO	Y88	35.59930	20,700 ft	18	-
FIX	AWY-HI	137.81100	6,309 m		
RJTT	-	35.54790	0 ft	96	Tokyo Intl
APT	-	139.78900	0 m		

## RJOB

Region: JAPAN  
Timezone: ASIA/TOKYO  
Runways: 1

Elevation: 785 ft / 239 m  
Location: 34.756900 133.855000  
Magnetic Var: 8.211 W

## METAR

RJOB 180300Z 21006KT 170V260 CAVOK 26/08 Q1019

## TAF

TAF RJOB 172305Z 1800/1906 14004KT 9999 FEW030

## Frequencies

TWR - 124.30 MHz - OKAYAMA TOWER  
DEP - 120.40 MHz - KANSAI DEPARTURE

APP - 121.20 MHz - KANSAI APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	150 ft	9,851 ft	59.11	ASPHALT	0 ft	184 ft
	46 m	3,003 m	67.32		0 m	56 m
25	150 ft	9,851 ft	239.12	ASPHALT	0 ft	187 ft
	46 m	3,003 m	247.34		0 m	57 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	LOC-ILS	IOY	110.30 MHz	18 nm	59.12	-	806 ft
				33 km	67.33		806 m
07	GS	IOY	110.30 MHz	10 nm	59.22	3.00	806 ft
				19 km	67.43		806 m

## RJTT

Region: JAPAN  
Timezone: ASIA/TOKYO  
Runways: 4

Elevation: 20 ft / 6 m  
Location: 35.547900 139.789000  
Magnetic Var: 7.807 W

## METAR

RJTT 180300Z 04003KT 360V080 9999 FEW030 SCT/// 25/15 Q1019 BECMG 08006KT

## TAF

TAF RJTT 172306Z 1800/1906 36006KT 9999 FEW030 BECMG 1800/1802 08004KT BECMG 1805/1807 20012KT BECMG 1815/1818 34

## Frequencies

REC - 128.80 MHz - TOKYO ATIS	CLD - 121.87 MHz - TOKYO DELIVERY
CLD - 121.82 MHz - TOKYO DELIVERY	GND - 118.22 MHz - TOKYO GROUND
GND - 121.62 MHz - TOKYO GROUND	GND - 121.70 MHz - TOKYO GROUND
GND - 121.97 MHz - TOKYO GROUND	GND - 122.07 MHz - TOKYO GROUND
TWR - 118.10 MHz - TOKYO TOWER	TWR - 118.57 MHz - TOKYO TOWER
TWR - 118.72 MHz - TOKYO TOWER	TWR - 124.35 MHz - TOKYO TOWER
TWR - 118.80 MHz - TOKYO TOWER	TWR - 116.20 MHz - TOKYO TOWER
APP - 119.10 MHz - TOKYO APPROACH	APP - 119.40 MHz - TOKYO APPROACH
APP - 119.65 MHz - TOKYO APPROACH	APP - 119.70 MHz - TOKYO APPROACH
APP - 125.40 MHz - TOKYO APPROACH	APP - 121.27 MHz - TOKYO APPROACH
APP - 124.40 MHz - TOKYO APPROACH	APP - 125.20 MHz - TOKYO APPROACH
APP - 125.80 MHz - TOKYO APPROACH	APP - 127.70 MHz - TOKYO APPROACH
DEP - 126.00 MHz - TOKYO DEPARTURE	DEP - 120.80 MHz - TOKYO DEPARTURE
DEP - 127.50 MHz - TOKYO DEPARTURE	DEP - 127.60 MHz - TOKYO DEPARTURE
DEP - 124.20 MHz - TOKYO DEPARTURE	DEP - 119.60 MHz - TOKYO DEPARTURE
DEP - 120.60 MHz - TOKYO DEPARTURE	DEP - 125.52 MHz - TOKYO DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	197 ft	11,039 ft	150.01	ASPHALT	0 ft	190 ft
	60 m	3,365 m	157.82		0 m	58 m
34R	197 ft	11,039 ft	330.02	ASPHALT	1,181 ft	194 ft
	60 m	3,365 m	337.83		360 m	59 m
04	197 ft	8,211 ft	34.92	ASPHALT	0 ft	194 ft
	60 m	2,503 m	42.73		0 m	59 m
22	197 ft	8,211 ft	214.93	ASPHALT	0 ft	190 ft
	60 m	2,503 m	222.74		0 m	58 m
16R	197 ft	9,855 ft	149.98	ASPHALT	0 ft	0 ft
	60 m	3,004 m	157.79		0 m	0 m
34L	197 ft	9,855 ft	329.99	ASPHALT	0 ft	190 ft
	60 m	3,004 m	337.80		0 m	58 m
05	197 ft	8,206 ft	42.44	ASPHALT	0 ft	190 ft
	60 m	2,501 m	50.25		0 m	58 m
23	197 ft	8,206 ft	222.45	ASPHALT	0 ft	194 ft
	60 m	2,501 m	230.26		0 m	59 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22	DME	IAD	108.10 MHz	18 nm	-	-	46 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	-		46 m
23	DME	ITD	110.50 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
34L	DME	IHA	111.70 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
34R	DME	ITC	108.90 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
16L	LOC-ILS	IOC	111.95 MHz	18 nm	150.02	-	20 ft
				33 km	157.83		20 m
16R	LOC-ILS	ITA	111.55 MHz	18 nm	149.99	-	20 ft
				33 km	157.80		20 m
22	LOC-ILS	IAD	108.10 MHz	18 nm	214.93	-	20 ft
				33 km	222.74		20 m
23	LOC-ILS	ITD	110.50 MHz	18 nm	222.45	-	20 ft
				33 km	230.26		20 m
34L	LOC-ILS	IHA	111.70 MHz	18 nm	329.99	-	20 ft
				33 km	337.80		20 m
34R	LOC-ILS	ITC	108.90 MHz	18 nm	330.02	-	20 ft
				33 km	337.83		20 m
16L	GS	IOC	111.95 MHz	10 nm	150.02	3.00	20 ft
				19 km	157.83		20 m
16R	GS	ITA	111.55 MHz	10 nm	149.99	3.00	20 ft
				19 km	157.80		20 m
22	GS	IAD	108.10 MHz	10 nm	214.93	3.00	20 ft
				19 km	222.74		20 m
23	GS	ITD	110.50 MHz	10 nm	222.45	3.00	20 ft
				19 km	230.26		20 m
34L	GS	IHA	111.70 MHz	10 nm	329.99	3.00	20 ft
				19 km	337.80		20 m
34R	GS	ITC	108.90 MHz	10 nm	330.02	3.00	20 ft
				19 km	337.83		20 m