

# KJFK

John F. Kennedy Intl


# MDST

Cibao Intl

2024/05/01 1927Z

KJFK WUZYU **L454** OKONU LEXAD **L453** LAMER **A554** CERDA **L464** LENUS MDST

1328.18 nm / 2459.79 km

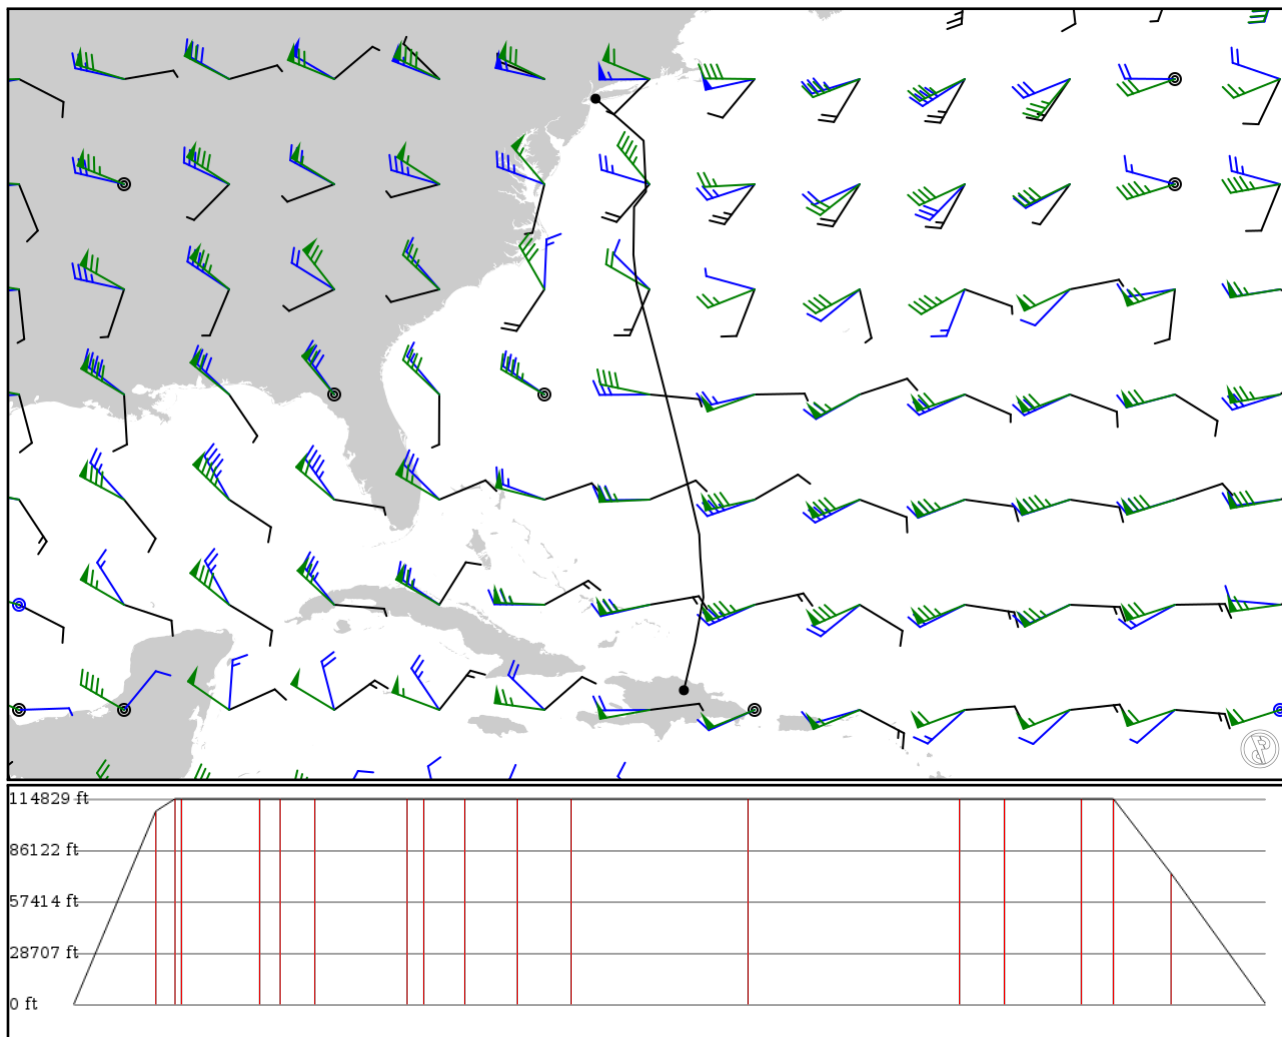

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KJFK APT	-	40.64010 -73.77650	0 ft 0 m	-	John F. Kennedy Intl
WUZYU FIX	-	39.48760 -72.44940	32,900 ft 10,028 m	92	-
ANNGO FIX	L454 AWY-HI	39.21860 -72.14780	35,000 ft 10,668 m	21	-
BERGH FIX	L454 AWY-HI	39.13250 -72.05160	35,000 ft 10,668 m	6	-
WEBBB FIX	L454 AWY-HI	37.67150 -71.98200	35,000 ft 10,668 m	87	-
OKONU FIX	L454 AWY-HI	37.30590 -71.96510	35,000 ft 10,668 m	21	-
LEXAD FIX	-	36.75550 -72.39400	35,000 ft 10,668 m	38	-
PAEPR FIX	L453 AWY-HI	35.04200 -72.41660	35,000 ft 10,668 m	102	-
SAUCR FIX	L453 AWY-HI	34.72430 -72.38190	35,000 ft 10,668 m	19	-
ONGOT FIX	L453 AWY-HI	33.98180 -72.30170	35,000 ft 10,668 m	44	-
LSIER FIX	L453 AWY-HI	33.02800 -72.04180	35,000 ft 10,668 m	58	-
ALOB1 FIX	L453 AWY-HI	32.04540 -71.78000	35,000 ft 10,668 m	60	-
BOREX FIX	L453 AWY-HI	28.85140 -70.96680	35,000 ft 10,668 m	196	-
LAMER FIX	L453 AWY-HI	25.00000 -70.05150	35,000 ft 10,668 m	236	-
RODRK FIX	A554 AWY-HI	24.17680 -70.01370	35,000 ft 10,668 m	49	-
CERDA FIX	A554 AWY-HI	22.74540 -69.90250	35,000 ft 10,668 m	86	-
MANII FIX	L464 AWY-HI	22.16210 -70.01060	35,000 ft 10,668 m	35	-
LENUS FIX	L464 AWY-HI	21.10120 -70.20510	22,300 ft 6,797 m	64	-
MDST APT	-	19.40610 -70.60470	0 ft 0 m	104	Cibao Intl

## KJFK

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 12 ft / 4 m  
Location: 40.640100 -73.776500  
Magnetic Var: 12.820 W

## METAR

KJFK 011851Z 14010KT 10SM FEW038 FEW060 SCT250 22/14 A2991 RMK A02 SLP127 T02170139

## TAF

TAF KJFK 011722Z 0118/0224 16010KT P6SM SCT060 FM012300 15008KT P6SM SCT007 SCT070 TEMPO 0200/0202 BKN007 FM020300

## Frequencies

REC - 115.40 MHz - D-ATIS	REC - 117.70 MHz - D-ATIS
REC - 128.72 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 135.05 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - KENNEDY GROUND
GND - 121.65 MHz - KENNEDY GROUND	TWR - 119.10 MHz - KENNEDY TOWER
TWR - 123.90 MHz - KENNEDY TOWER	APP - 125.70 MHz - NEW YORK APPROACH
APP - 128.12 MHz - NEW YORK APPROACH	APP - 118.40 MHz - NEW YORK APPROACH
APP - 123.70 MHz - NEW YORK APPROACH	APP - 126.80 MHz - NEW YORK APPROACH
APP - 132.40 MHz - NEW YORK APPROACH	APP - 134.35 MHz - NEW YORK APPROACH
DEP - 135.90 MHz - NEW YORK DEPARTURE	DEP - 123.70 MHz - NEW YORK DEPARTURE
DEP - 124.75 MHz - NEW YORK DEPARTURE	DEP - 134.35 MHz - NEW YORK DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	200 ft	14,526 ft	120.83	CONCRETE	2,057 ft	390 ft
	61 m	4,428 m	133.65		627 m	119 m
31L	200 ft	14,526 ft	300.86	CONCRETE	3,271 ft	495 ft
	61 m	4,428 m	313.68		997 m	151 m
13L	151 ft	10,010 ft	120.85	CONCRETE	912 ft	387 ft
	46 m	3,051 m	133.67		278 m	118 m
31R	151 ft	10,010 ft	300.87	CONCRETE	1,037 ft	177 ft
	46 m	3,051 m	313.69		316 m	54 m
04R	200 ft	8,407 ft	30.67	ASPHALT	0 ft	440 ft
	61 m	2,562 m	43.49		0 m	134 m
22L	200 ft	8,407 ft	210.68	ASPHALT	0 ft	505 ft
	61 m	2,562 m	223.50		0 m	154 m
04L	200 ft	12,091 ft	30.67	CONCRETE	459 ft	200 ft
	61 m	3,685 m	43.49		140 m	61 m
22R	200 ft	12,091 ft	210.68	CONCRETE	3,425 ft	407 ft
	61 m	3,685 m	223.50		1,044 m	124 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHIQ	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04R	DME	IJFK	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
13L	DME	ITLK	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
22L	DME	IIWY	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22R	DME	IJOC	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
31R	DME	IRTH	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04L	LOC-ILS	IHIQ	110.90 MHz	18 nm	30.68	-	12 ft
				33 km	43.50		12 m
04R	LOC-ILS	IJFK	109.50 MHz	18 nm	30.67	-	12 ft
				33 km	43.49		12 m
13L	LOC-ILS	ITLK	111.50 MHz	18 nm	120.87	-	12 ft
				33 km	133.69		12 m
22L	LOC-ILS	IIWY	110.90 MHz	18 nm	210.67	-	12 ft
				33 km	223.49		12 m
22R	LOC-ILS	IJOC	109.50 MHz	18 nm	210.68	-	12 ft
				33 km	223.50		12 m
31L	LOC-ILS	IMOH	111.35 MHz	18 nm	300.84	-	12 ft
				33 km	313.66		12 m
31R	LOC-ILS	IRTH	111.50 MHz	18 nm	300.87	-	12 ft
				33 km	313.69		12 m
04L	GS	IHIQ	110.90 MHz	10 nm	30.68	3.00	12 ft
				19 km	43.50		12 m
04R	GS	IJFK	109.50 MHz	10 nm	30.67	3.00	12 ft
				19 km	43.49		12 m
13L	GS	ITLK	111.50 MHz	10 nm	120.87	3.00	12 ft
				19 km	133.69		12 m
22L	GS	IIWY	110.90 MHz	10 nm	210.67	3.00	12 ft
				19 km	223.49		12 m
22R	GS	IJOC	109.50 MHz	10 nm	210.68	3.00	12 ft
				19 km	223.50		12 m
31L	GS	IMOH	111.35 MHz	10 nm	300.84	3.00	12 ft
				19 km	313.66		12 m
31R	GS	IRTH	111.50 MHz	10 nm	300.87	3.00	12 ft
				19 km	313.69		12 m

## MDST

Region: DOMINICAN REPUBLIC  
Timezone: AMERICA/SANTO\_DOMINGO  
Runways: 1

Elevation: 567 ft / 173 m  
Location: 19.406100 -70.604700  
Magnetic Var: 11.631 W

## METAR

MDST 011900Z 08008KT 060V130 8000 -RA FEW016CB BKN017 24/23 Q1011 CB/E/SE/S/SW/W/N

## TAF

TAF MDST 011600Z 0118/0218 12008KT 9999 BKN017 BKN070 PROB40 0118/0200 5000 TSRA FEW014CB BKN015 OVC070

## Frequencies

GND - 121.90 MHz - SANTIAGO GROUND  
APP - 119.00 MHz - PUERTO PLATA APPROACH

TWR - 118.30 MHz - SANTIAGO TOWER

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
11	148 ft	8,610 ft	103.16	ASPHALT	0 ft	184 ft
	45 m	2,625 m	114.79		0 m	56 m
29	148 ft	8,610 ft	283.16	ASPHALT	108 ft	194 ft
	45 m	2,625 m	294.80		33 m	59 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
11	DME	EXP	109.30 MHz	18 nm	-	-	563 ft
				33 km	-		563 m
11	LOC-ILS	EXP	109.30 MHz	18 nm	103.11	-	565 ft
				33 km	114.74		565 m
11	GS	EXP	109.30 MHz	10 nm	103.16	2.80	565 ft
				19 km	114.79		565 m