

LIPZ

Venezia-Tessera "Marco Polo"


LFPG

Paris Charles De Gaulle

2024/06/06 0531Z

LIPZ UNTAD **Q333** RESIA **UP131** ARGAX **UL613** LUL **G4** RESPO **UL613** RLP **B13** SOMDA LFPG

457.11 nm / 846.57 km

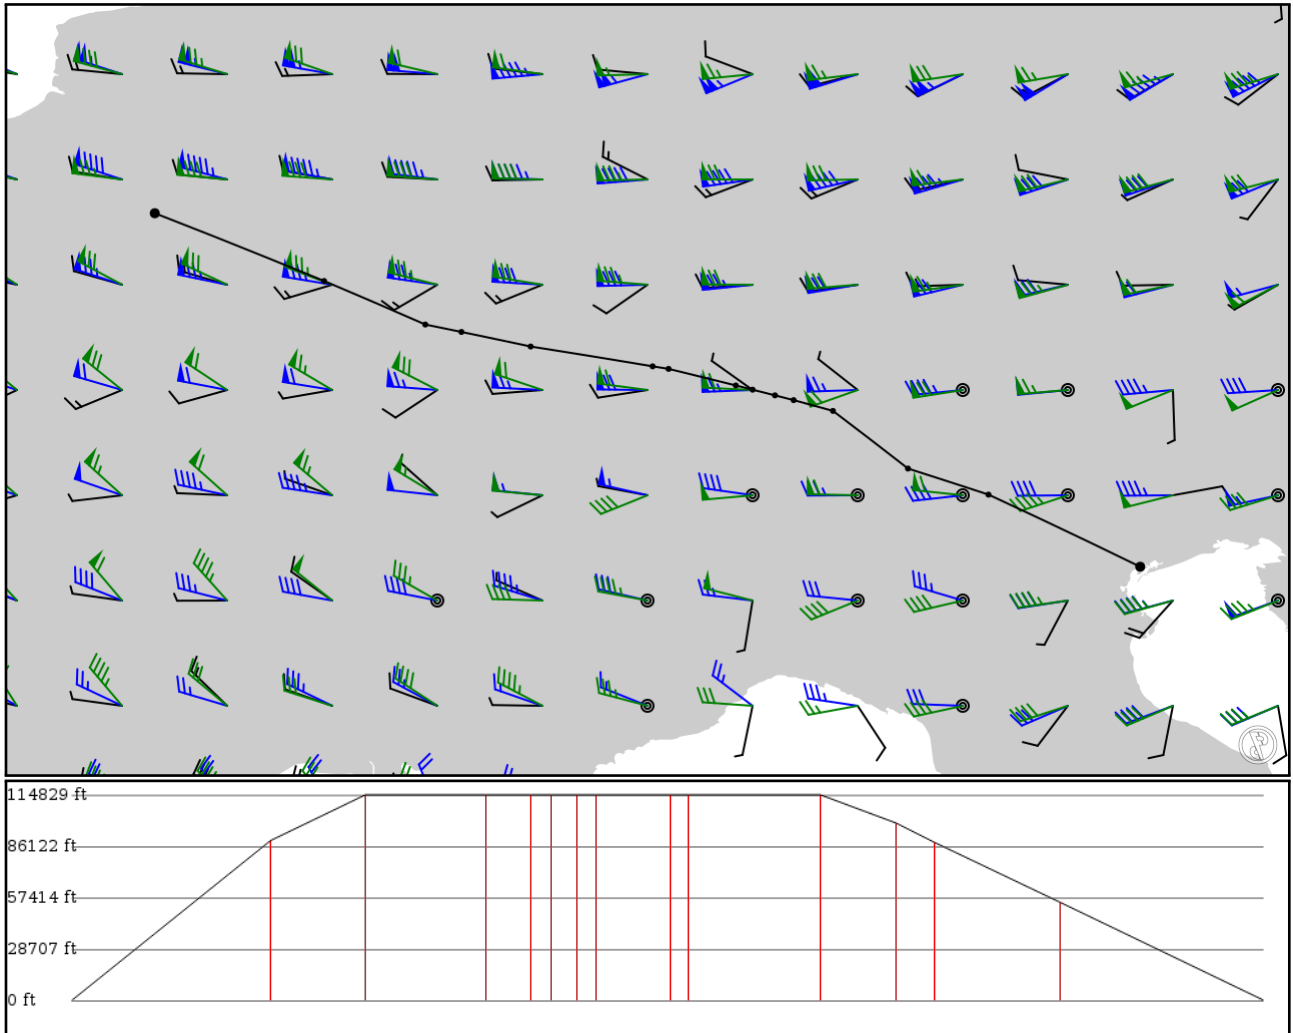

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIPZ APT	-	45.50480 12.34970	0 ft 0 m	-	Venezia-Tessera "Marco Polo"
UNTAD FIX	-	46.22000 10.84280	27,200 ft 8,291 m	76	-
RESIA FIX	Q333 AWY-HI	46.47830 10.04330	35,000 ft 10,668 m	36	-
ARGAX FIX	UP131 AWY-HI	47.05000 9.29806	35,000 ft 10,668 m	46	-
ELMUR FIX	UL613 AWY-HI	47.15680 8.90761	35,000 ft 10,668 m	17	-
MANEG FIX	UL613 AWY-HI	47.20420 8.72222	35,000 ft 10,668 m	8	-
RIPUS FIX	UL613 AWY-HI	47.26030 8.50000	35,000 ft 10,668 m	9	-
DITON FIX	UL613 AWY-HI	47.30220 8.33333	35,000 ft 10,668 m	7	-
HOC DME	UL613 AWY-HI	47.46660 7.66544	35,000 ft 10,668 m	28	HOCHWALD VOR-DME
NATLI FIX	UL613 AWY-HI	47.49190 7.50722	35,000 ft 10,668 m	6	-
LUL VOR	UL613 AWY-HI	47.68830 6.29558	35,000 ft 10,668 m	50	LUXEUIL
RESPO FIX	G4 AWY-LO	47.83280 5.60800	30,200 ft 9,205 m	29	-
RLP VOR	UL613 AWY-HI	47.90630 5.24917	26,900 ft 8,199 m	15	ROLAMPONT
SOMDA FIX	B13 AWY-LO	48.33780 4.24444	16,700 ft 5,090 m	47	-
LFPG APT	-	49.00970 2.56257	0 ft 0 m	77	Paris Charles De Gaulle

LIPZ

Region: ITALY
Timezone: EUROPE/ROME
Runways: 2

Elevation: 4 ft / 1 m
Location: 45.504800 12.349700
Magnetic Var: 3.913 E

METAR

LIPZ 060450Z AUTO 04005KT 9999 NCD 20/19 Q1016

TAF

TAF LIPZ 052300Z 0600/0706 VRB05KT CAVOK BECMG 0609/0611 15010KT BECMG 0617/0619 VRB05KT

Frequencies

REC - 128.65 MHz - ATIS
TWR - 120.20 MHz - VENEZIA TOWER
APP - 118.25 MHz - VENEZIA APPROACH
GND - 121.70 MHz - VENEZIA GROUND
APP - 118.90 MHz - VENEZIA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	148 ft	10,836 ft	42.03	ASPHALT	0 ft	0 ft
	45 m	3,303 m	38.12		0 m	0 m
22L	148 ft	10,836 ft	222.05	ASPHALT	0 ft	0 ft
	45 m	3,303 m	218.14		0 m	0 m
04L	148 ft	9,129 ft	42.03	ASPHALT	318 ft	0 ft
	45 m	2,782 m	38.12		97 m	0 m
22R	148 ft	9,129 ft	222.05	ASPHALT	0 ft	0 ft
	45 m	2,782 m	218.13		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	VTS	109.95 MHz	18 nm	-	-	26 ft
				33 km	-		26 m
04R	LOC-ILS	VTS	109.95 MHz	18 nm	42.04	-	4 ft
				33 km	38.13		4 m
04R	GS	VTS	109.95 MHz	10 nm	42.04	3.00	4 ft
				19 km	38.13		4 m

LFPG

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 4

Elevation: 392 ft / 119 m
Location: 49.009700 2.562570
Magnetic Var: 1.505 E

METAR

LFPG 060500Z 02004KT 350V110 CAVOK 10/08 Q1017 NOSIG

TAF

TAF LFPG 052300Z 0600/0706 03005KT CAVOK TX20/0615Z TN11/0603Z BECMG 0608/0610 30010KT

Frequencies

REC - 128.32 MHz - ATIS	REC - 127.12 MHz - ATIS
TWR - 120.90 MHz - DE GAULLE TOWER	TWR - 125.32 MHz - DE GAULLE TOWER
TWR - 119.62 MHz - DE GAULLE TOWER	TWR - 119.25 MHz - DE GAULLE TOWER
TWR - 118.65 MHz - DE GAULLE TOWER	TWR - 123.60 MHz - DE GAULLE TOWER
TWR - 120.65 MHz - DE GAULLE TOWER	GND - 121.90 MHz - DE GAULLE GROUND
GND - 125.30 MHz - DE GAULLE GROUND	GND - 121.70 MHz - DE GAULLE GROUND
CLD - 121.80 MHz - CLEARANCE DELIVERY	APP - 118.15 MHz - DE GAULLE APPROACH
APP - 119.85 MHz - DE GAULLE APPROACH	APP - 121.15 MHz - DE GAULLE APPROACH
APP - 125.82 MHz - DE GAULLE APPROACH	APP - 126.42 MHz - DE GAULLE APPROACH
DEP - 124.35 MHz - DE GAULLE DEPARTURE	DEP - 126.57 MHz - DE GAULLE DEPARTURE
DEP - 131.20 MHz - DE GAULLE DEPARTURE	DEP - 133.37 MHz - DE GAULLE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	148 ft	13,713 ft	85.31	ASPHALT	0 ft	489 ft
	45 m	4,180 m	83.80		0 m	149 m
26R	148 ft	13,713 ft	265.35	ASPHALT	1,877 ft	279 ft
	45 m	4,180 m	263.85		572 m	85 m
09L	197 ft	8,866 ft	85.32	ASPHALT	0 ft	0 ft
	60 m	2,703 m	83.81		0 m	0 m
27R	197 ft	8,866 ft	265.35	ASPHALT	0 ft	0 ft
	60 m	2,703 m	263.84		0 m	0 m
08R	197 ft	8,833 ft	85.33	ASPHALT	0 ft	489 ft
	60 m	2,692 m	83.82		0 m	149 m
26L	197 ft	8,833 ft	265.35	ASPHALT	0 ft	486 ft
	60 m	2,692 m	263.85		0 m	148 m
09R	148 ft	13,746 ft	85.30	ASPHALT	0 ft	0 ft
	45 m	4,190 m	83.79		0 m	0 m
27L	148 ft	13,746 ft	265.34	ASPHALT	1,959 ft	0 ft
	45 m	4,190 m	263.84		597 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	DSE	108.55 MHz	18 nm	-	-	358 ft
				33 km	-		358 m
09L	DME	PNE	109.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
09R	DME	CGE	110.10 MHz	18 nm	-	-	392 ft
				33 km	-		392 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	DME	DSU	108.35 MHz	18 nm	-	-	338 ft
				33 km	-		338 m
27L	DME	CGW	110.70 MHz	18 nm	-	-	407 ft
				33 km	-		407 m
27R	DME	PNW	110.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
08L	LOC-ILS	GLE	108.70 MHz	18 nm	85.33	-	392 ft
				33 km	83.82		392 m
08R	LOC-ILS	DSE	108.55 MHz	18 nm	85.34	-	392 ft
				33 km	83.83		392 m
09L	LOC-ILS	PNE	109.35 MHz	18 nm	85.33	-	392 ft
				33 km	83.82		392 m
09R	LOC-ILS	CGE	110.10 MHz	18 nm	85.32	-	392 ft
				33 km	83.81		392 m
26L	LOC-ILS	DSU	108.35 MHz	18 nm	265.34	-	392 ft
				33 km	263.83		392 m
26R	LOC-ILS	GAU	111.95 MHz	18 nm	265.33	-	392 ft
				33 km	263.82		392 m
27L	LOC-ILS	CGW	110.70 MHz	18 nm	265.32	-	392 ft
				33 km	263.81		392 m
27R	LOC-ILS	PNW	110.35 MHz	18 nm	265.33	-	392 ft
				33 km	263.82		392 m
08L	GS	GLE	108.70 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.82		392 m
08R	GS	DSE	108.55 MHz	10 nm	85.34	3.00	392 ft
				19 km	83.83		392 m
09L	GS	PNE	109.35 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.82		392 m
09R	GS	CGE	110.10 MHz	10 nm	85.32	3.00	392 ft
				19 km	83.81		392 m
26L	GS	DSU	108.35 MHz	10 nm	265.34	3.00	392 ft
				19 km	263.83		392 m
26R	GS	GAU	111.95 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.82		392 m
27L	GS	CGW	110.70 MHz	10 nm	265.32	3.00	392 ft
				19 km	263.81		392 m
27R	GS	PNW	110.35 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.82		392 m