

KSNA

John Wayne/Orange County


KOAK

Metro Oakland Intl

2024/05/21 2250Z

KSNA GMN V137 AVE J1 OAK KOAK

323.77 nm / 599.62 km

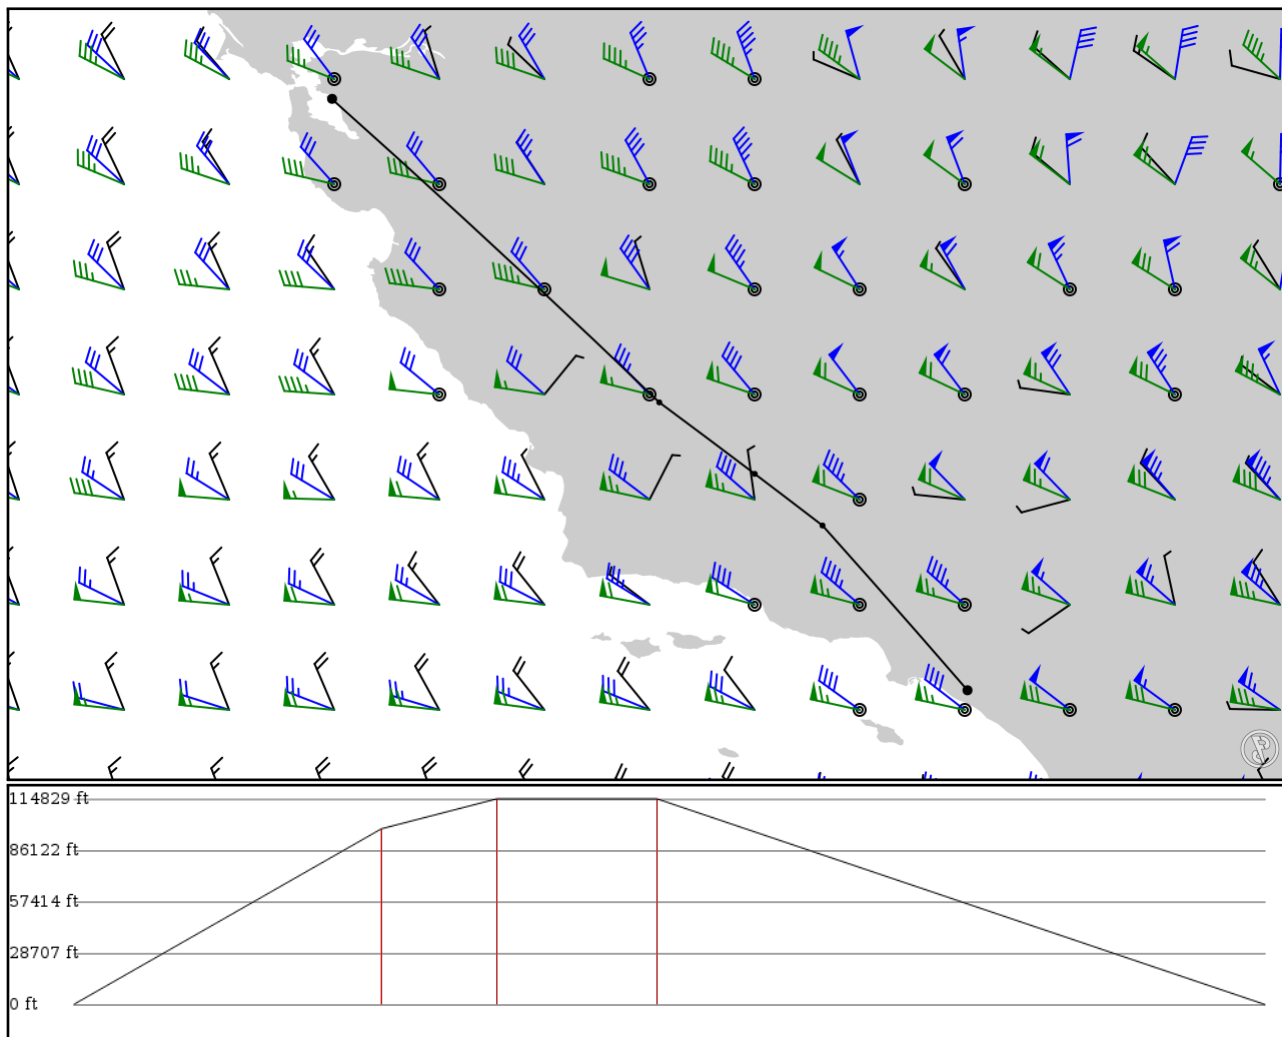

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSNA APT	-	33.67610 -117.86800	0 ft 0 m	-	John Wayne/Orange County
GMN VOR	-	34.80400 -118.86100	29,900 ft 9,114 m	83	GORMAN
TAFTO FIX	V137 AWY-LO	35.15760 -119.32500	35,000 ft 10,668 m	31	-
AVE VOR	V137 AWY-LO	35.64700 -119.97900	35,000 ft 10,668 m	43	AVENAL
OAK VOR	J1 AWY-HI	37.72590 -122.22400	0 ft 0 m	165	OAKLAND
KOAK APT	-	37.72500 -122.22000	0 ft 0 m	0	Metro Oakland Intl

KSNA

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 2

Elevation: 56 ft / 17 m
Location: 33.676100 -117.868000
Magnetic Var: 11.279 E

METAR

KSNA 212153Z 21007KT 10SM FEW027 SCT036 19/11 A2994 RMK A02 SLP139 T01940106

TAF

KSNA 211737Z 2118/2218 VRB04KT P6SM BKN025 FM212000 20005KT P6SM SCT025 FM220600 VRB04KT P6SM OVC018

Frequencies

REC - 126.00 MHz - ATIS	COM - 126.80 MHz - CTAF
COM - 122.95 MHz - UNICOM	CLD - 118.00 MHz - CLEARANCE DELIVERY
CLD - 121.85 MHz - CLEARANCE DELIVERY	GND - 120.80 MHz - JOHN WAYNE GROUND
GND - 132.25 MHz - JOHN WAYNE GROUND	TWR - 119.90 MHz - JOHN WAYNE TOWER
TWR - 126.80 MHz - JOHN WAYNE TOWER	TWR - 128.35 MHz - JOHN WAYNE TOWER
APP - 121.30 MHz - SOCAL APPROACH	DEP - 128.10 MHz - SOCAL DEPARTURE
DEP - 132.70 MHz - SOCAL DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02L	151 ft	5,711 ft	27.79	ASPHALT	0 ft	1,001 ft
	46 m	1,741 m	16.51		0 m	305 m
20R	151 ft	5,711 ft	207.80	ASPHALT	0 ft	194 ft
	46 m	1,741 m	196.52		0 m	59 m
02R	75 ft	2,891 ft	27.81	ASPHALT	0 ft	404 ft
	23 m	881 m	16.53		0 m	123 m
20L	75 ft	2,891 ft	207.81	ASPHALT	0 ft	151 ft
	23 m	881 m	196.53		0 m	46 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
20R	DME	IOJW	108.30 MHz	18 nm	-	-	40 ft
				33 km	-		40 m
20R	DME	ISNA	111.75 MHz	18 nm	-	-	68 ft
				33 km	-		68 m
20R	LOC-ILS	ISNA	111.75 MHz	18 nm	207.81	-	56 ft
				33 km	196.53		56 m
20R	GS	ISNA	111.75 MHz	10 nm	207.81	3.00	56 ft
				19 km	196.53		56 m

KOAK

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 8 ft / 2 m
Location: 37.725000 -122.220000
Magnetic Var: 12.837 E

METAR

KOAK 212153Z 30011KT 10SM FEW200 22/09 A2996 RMK AO2 SLP150 T02220094 \$

TAF

TAF KOAK 211720Z 2118/2224 27005KT P6SM FEW250 FM212000 27012KT P6SM SCT250 FM220500 21009KT P6SM SCT030 FM221800

Frequencies

REC - 133.77 MHz - OAKLAND ATIS	COM - 122.95 MHz - OAKLAND UNICOM
CLD - 121.10 MHz - OAKLAND CLEARANCE DELIVERY	GND - 121.90 MHz - OAKLAND GROUND NORTH
GND - 121.75 MHz - OAKLAND GROUND SOUTH	TWR - 118.30 MHz - OAKLAND TOWER NORTH
TWR - 127.20 MHz - OAKLAND TOWER SOUTH	TWR - 124.90 MHz - OAKLAND TOWER SOUTH
APP - 125.35 MHz - NORCAL APPROACH	APP - 128.32 MHz - NORCAL APPROACH EAST
APP - 135.10 MHz - NORCAL APPROACH EAST	APP - 133.95 MHz - NORCAL APPROACH WEST
APP - 134.50 MHz - NORCAL APPROACH WEST	DEP - 120.90 MHz - NORCAL DEPARTURE NORTH WEST
DEP - 135.10 MHz - NORCAL DEPARTURE WEST	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	150 ft	10,530 ft	130.11	ASPHALT	0 ft	397 ft
	46 m	3,210 m	117.27		0 m	121 m
30	150 ft	10,530 ft	310.13	ASPHALT	128 ft	397 ft
	46 m	3,210 m	297.29		39 m	121 m
10R	150 ft	6,219 ft	112.25	ASPHALT	0 ft	774 ft
	46 m	1,896 m	99.42		0 m	236 m
28L	150 ft	6,219 ft	292.27	ASPHALT	0 ft	390 ft
	46 m	1,896 m	279.43		0 m	119 m
10L	150 ft	5,463 ft	112.24	ASPHALT	0 ft	390 ft
	46 m	1,665 m	99.40		0 m	119 m
28R	150 ft	5,463 ft	292.25	ASPHALT	0 ft	259 ft
	46 m	1,665 m	279.42		0 m	79 m
15	75 ft	3,379 ft	164.48	ASPHALT	0 ft	0 ft
	23 m	1,030 m	151.64		0 m	0 m
33	75 ft	3,379 ft	344.48	ASPHALT	0 ft	0 ft
	23 m	1,030 m	331.64		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	LOC-ILS	IAAZ	111.90 MHz	18 nm	130.11	-	8 ft
				33 km	117.27		8 m
28R	LOC-ILS	IOAK	109.90 MHz	18 nm	292.25	-	8 ft
				33 km	279.41		8 m
30	LOC-ILS	IINB	108.70 MHz	18 nm	310.11	-	8 ft
				33 km	297.27		8 m
12	GS	IAAZ	111.90 MHz	10 nm	130.11	2.75	8 ft
				19 km	117.27		8 m
28R	GS	IOAK	109.90 MHz	10 nm	292.25	3.00	8 ft
				19 km	279.41		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	GS	IINB	108.70 MHz	10 nm	310.11	3.00	8 ft
				19 km	297.27		8 m