


2024/05/25 0407Z

EGSS ING **UL15** RIPUS ALBIX **M858** CANNE **L995** LOMED **Z910** KUTID LICA

1046.19 nm / 1937.54 km

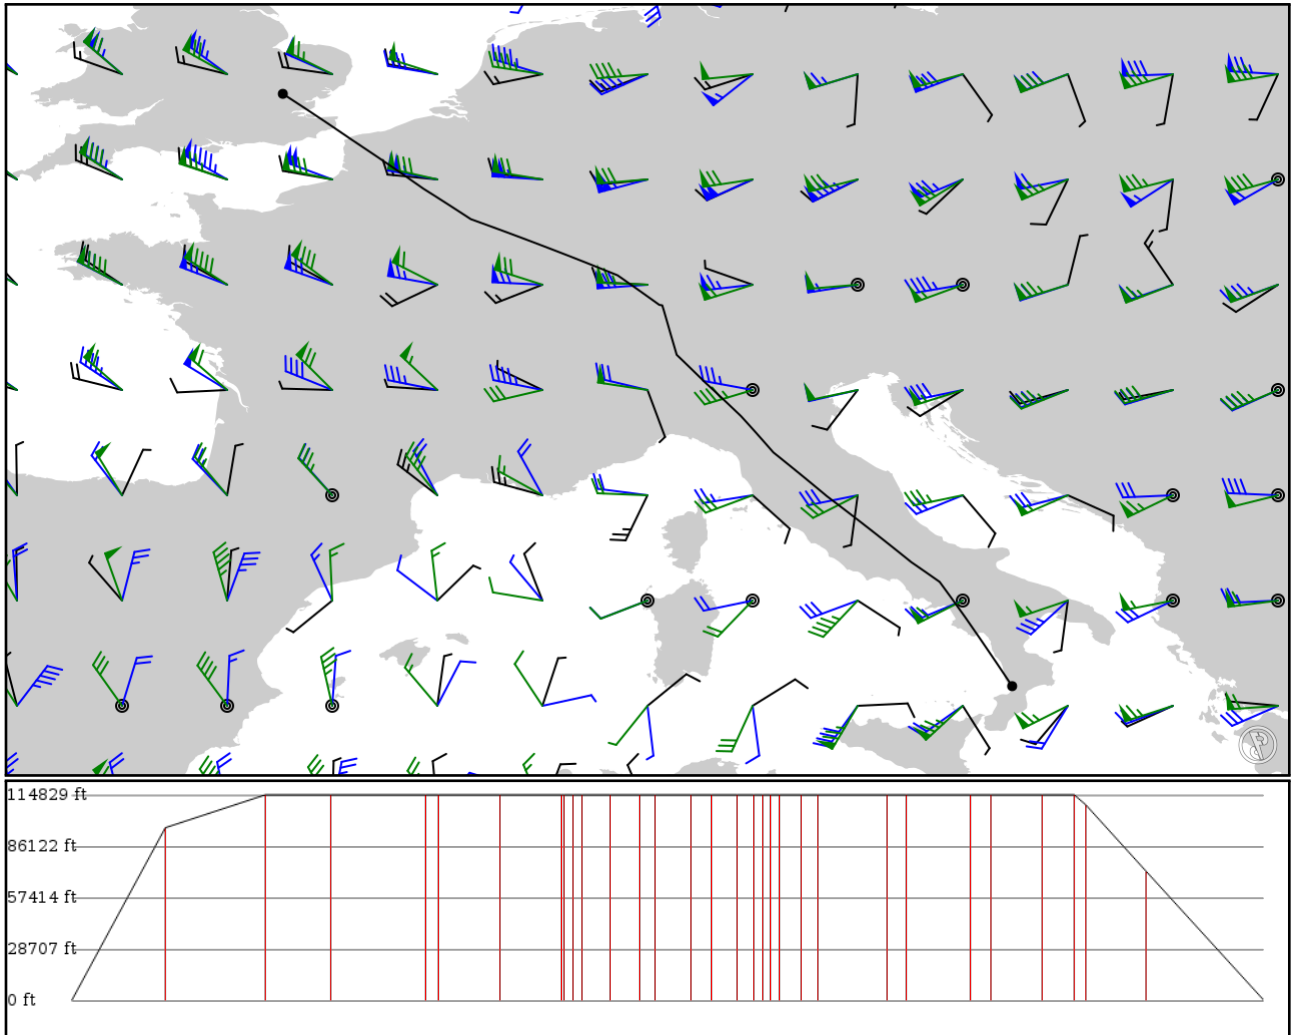

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EGSS	-	51.88510	0 ft	-	Stansted
APT	-	0.23499	0 m		
ING	-	50.88320	29,400 ft	82	SAINT INGLEVERT
NDB	-	1.74181	8,961 m		
LESDO	UL15	49.80830	35,000 ft	88	-
FIX	AWY-HI	3.31806	10,668 m		
RANUX	UL15	49.13890	35,000 ft	57	-
FIX	AWY-HI	4.36167	10,668 m		
NEBAX	UL15	48.45690	35,000 ft	83	-
FIX	AWY-HI	6.19444	10,668 m		
OBAKI	UL15	48.36580	35,000 ft	10	-
FIX	AWY-HI	6.43056	10,668 m		
BEGAR	UL15	47.90830	35,000 ft	53	-
FIX	AWY-HI	7.58333	10,668 m		
RIPUS	UL15	47.26030	35,000 ft	53	-
FIX	AWY-HI	8.50000	10,668 m		
ALBIX	-	47.24980	35,000 ft	2	-
FIX	-	8.56457	10,668 m		
AGERI	M858	47.11710	35,000 ft	8	-
FIX	AWY-LO	8.60503	10,668 m		
URNAS	M858	47.00230	35,000 ft	7	-
FIX	AWY-LO	8.63828	10,668 m		
LUKOM	M858	46.58500	35,000 ft	25	-
FIX	AWY-LO	8.75861	10,668 m		
CANNE	M858	46.16670	35,000 ft	25	-
FIX	AWY-LO	8.88111	10,668 m		
PEPAG	L995	45.98390	35,000 ft	13	-
FIX	AWY-HI	9.07139	10,668 m		
TZO	L995	45.55920	35,000 ft	31	TREZZO
VOR	AWY-HI	9.50700	10,668 m		
BEKAN	L995	45.32500	35,000 ft	17	-
FIX	AWY-HI	9.76111	10,668 m		
MISPO	L995	45.02390	35,000 ft	22	-
FIX	AWY-HI	10.08060	10,668 m		
OSBUL	L995	44.82220	35,000 ft	15	-
FIX	AWY-HI	10.29330	10,668 m		
IVLOX	L995	44.71940	35,000 ft	7	-
FIX	AWY-HI	10.38690	10,668 m		
RIPDU	L995	44.62250	35,000 ft	6	-
FIX	AWY-HI	10.47500	10,668 m		
LUPOS	L995	44.50470	35,000 ft	8	-
FIX	AWY-HI	10.58140	10,668 m		
IPLUB	L995	44.24830	35,000 ft	18	-
FIX	AWY-HI	10.80890	10,668 m		
LOMED	L995	44.02720	35,000 ft	15	-
FIX	AWY-HI	11.00330	10,668 m		
VERUN	Z910	43.28140	35,000 ft	59	-
FIX	AWY-HI	11.92140	10,668 m		
NIKMA	Z910	43.06640	35,000 ft	17	-
FIX	AWY-HI	12.18030	10,668 m		
GENGI	Z910	42.39580	35,000 ft	55	-
FIX	AWY-HI	13.05580	10,668 m		
EVULI	Z910	42.16890	35,000 ft	18	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	13.34560	10,668 m		
ERIKA	Z910	41.62280	35,000 ft	44	-
FIX	AWY-HI	14.03110	10,668 m		
NEBAS	Z910	41.30420	35,000 ft	28	-
FIX	AWY-HI	14.49140	10,668 m		
AKAMO	Z910	41.19080	33,300 ft	9	-
FIX	AWY-HI	14.65330	10,150 m		
KUTID	Z910	40.42030	22,000 ft	52	-
FIX	AWY-HI	15.21170	6,706 m		
LICA	-	38.90500	0 ft	102	Lamezia Terme "Sant'Eufemia"
APT	-	16.24580	0 m		

EGSS

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 348 ft / 106 m
Location: 51.885100 0.234989
Magnetic Var: 0.584 E

METAR

EGSS 250320Z AUTO 07004KT 8000 BKN031 09/09 Q1019

TAF

TAF TAF EGSS 242314Z 2500/2606 VRB04KT 9999 SCT035 TEMPO 2501/2508 8000 PROB40 2503/2507 3000 BR MIFG BECMG 2600/2

Frequencies

DEP - 120.62 MHz - ESSEX RADAR	APP - 120.62 MHz - ESSEX RADAR
APP - 132.05 MHz - STANSTED APPROACH	CLD - 121.95 MHz - STANSTED CLEARANCE DELIVERY
GND - 121.72 MHz - STANSTED GROUND	TWR - 123.80 MHz - STANSTED TOWER
TWR - 125.55 MHz - STANSTED TOWER	APP - 136.20 MHz - STANSTED DIRECT
REC - 114.55 MHz - ATIS	REC - 127.17 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	9,984 ft	42.78	ASPHALT	974 ft	0 ft
	46 m	3,043 m	42.20		297 m	0 m
22	151 ft	9,984 ft	222.81	ASPHALT	0 ft	0 ft
	46 m	3,043 m	222.22		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	ISED	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
22	DME	ISX	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
04	LOC-ILS	ISED	110.50 MHz	18 nm	42.80	-	348 ft
				33 km	42.22		348 m
22	LOC-ILS	ISX	110.50 MHz	18 nm	222.80	-	348 ft
				33 km	222.22		348 m
04	GS	ISED	110.50 MHz	10 nm	42.80	3.00	348 ft
				19 km	42.22		348 m
22	GS	ISX	110.50 MHz	10 nm	222.80	3.00	348 ft
				19 km	222.22		348 m

LICA

Region: ITALY
Timezone: EUROPE/ROME
Runways: 1

Elevation: 39 ft / 12 m
Location: 38.905000 16.245800
Magnetic Var: 4.128 E

METAR

LICA 250320Z AUTO 09005KT 9999 FEW150/// 12/10 Q1016

TAF

TAF LICA 242300Z 2500/2524 VRB05KT 9999 FEW040 BECMG 2508/2510 28013KT TEMPO 2514/2518 4000 SHRA

Frequencies

TWR - 125.90 MHz - LAMEZIA TOWER
APP - 122.10 MHz - LAMEZIA APPROACH

TWR - 122.10 MHz - LAMEZIA TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	154 ft	9,908 ft	98.51	ASPHALT	328 ft	0 ft
	47 m	3,020 m	94.38		100 m	0 m
28	154 ft	9,908 ft	278.53	ASPHALT	1,224 ft	0 ft
	47 m	3,020 m	274.40		373 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	DME	LAM	110.30 MHz	25 nm	-	-	21 ft
				46 km	-		21 m
28	LOC-ILS	LAM	110.30 MHz	18 nm	278.56	-	39 ft
				33 km	274.43		39 m
28	GS	LAM	110.30 MHz	10 nm	278.56	3.00	39 ft
				19 km	274.43		39 m