


2024/05/27 0909Z

KABQ BLINI **V291** GUP **J72** PGS KLAS

425.42 nm / 787.88 km

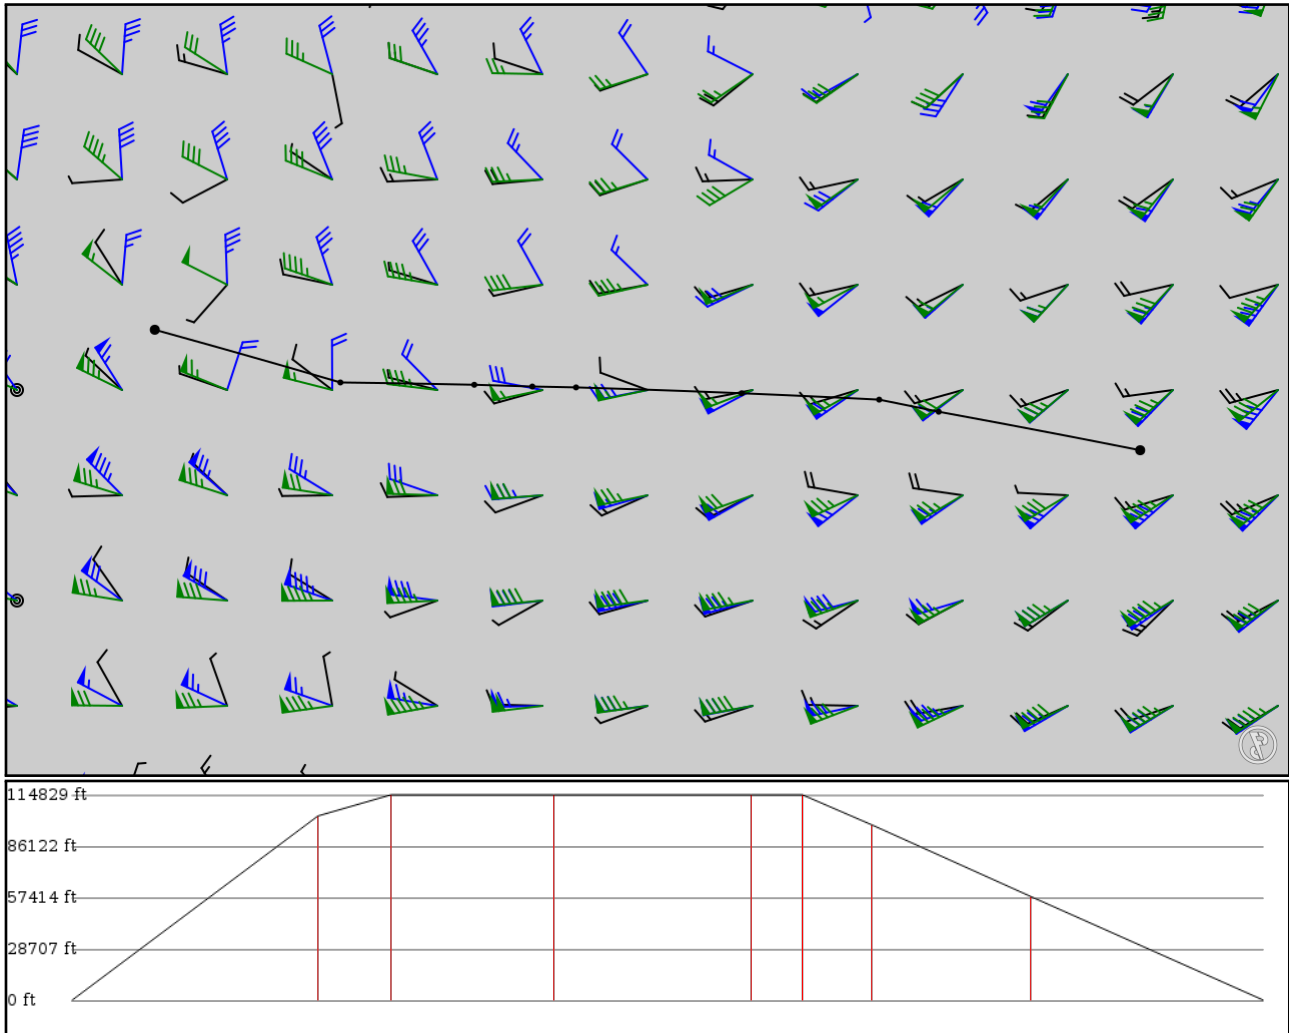

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KABQ	-	35.03820	0 ft	-	Albuquerque
APT	-	-106.61000	0 m		
BLINI	-	35.37130	31,400 ft	88	-
FIX	-	-108.35700	9,571 m		
GUP	V291	35.47600	35,000 ft	26	GALLUP
VOR	AWY-LO	-108.87300	10,668 m		
DILCO	J72	35.53120	35,000 ft	58	-
FIX	AWY-HI	-110.06500	10,668 m		
HMFRY	J72	35.58200	35,000 ft	70	-
FIX	AWY-HI	-111.50100	10,668 m		
BAVPE	J72	35.58950	35,000 ft	18	-
FIX	AWY-HI	-111.88000	10,668 m		
CUTRO	J72	35.60470	29,900 ft	24	-
FIX	AWY-HI	-112.38300	9,114 m		
PGS	J72	35.62470	17,700 ft	56	PEACH SPRINGS
VOR	AWY-HI	-113.54400	5,395 m		
KLAS	-	36.08070	0 ft	82	McCarran Intl
APT	-	-115.15300	0 m		

KABQ

Region: UNITED STATES

Timezone: AMERICA/DENVER

Runways: 3

Elevation: 5,354 ft / 1,632 m

Location: 35.038200 -106.610000

Magnetic Var: 7.887 E

METAR

KABQ 270752Z 00000KT 10SM CLR 16/M03 A3011 RMK A02 SLP122 T01611033

TAF

TAF KABQ 270540Z 2706/2806 36006KT P6SM SKC FM271700 20007KT P6SM SKC FM280200 10007KT P6SM SKC

Frequencies

REC - 118.00 MHz - ATIS

CLD - 119.20 MHz - CLNC DEL

TWR - 123.77 MHz -

APP - 123.90 MHz - APP/DEP

APP - 127.40 MHz - APP/DEP

COM - 122.95 MHz - UNICOM

GND - 121.90 MHz -

TWR - 120.30 MHz -

APP - 124.40 MHz - APP/DEP

APP - 134.80 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	150 ft	13,762 ft	90.43	CONCRETE	1,001 ft	551 ft
	46 m	4,195 m	82.54		305 m	168 m
26	150 ft	13,762 ft	270.45	CONCRETE	0 ft	1,001 ft
	46 m	4,195 m	262.56		0 m	305 m
03	150 ft	10,002 ft	44.66	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.77		0 m	122 m
21	150 ft	10,002 ft	224.67	CONCRETE	0 ft	0 ft
	46 m	3,049 m	216.78		0 m	0 m
12	150 ft	6,024 ft	128.99	CONCRETE	0 ft	0 ft
	46 m	1,836 m	121.10		0 m	0 m
30	150 ft	6,024 ft	309.00	CONCRETE	0 ft	0 ft
	46 m	1,836 m	301.11		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	ISPT	111.90 MHz	18 nm	-	-	5,374 ft
				33 km	-		5,374 m
03	LOC-ILS	IBZY	111.50 MHz	18 nm	44.67	-	5,354 ft
				33 km	36.78		5,354 m
08	LOC-ILS	ISPT	111.90 MHz	18 nm	90.44	-	5,354 ft
				33 km	82.55		5,354 m
03	GS	IBZY	111.50 MHz	10 nm	44.67	3.00	5,354 ft
				19 km	36.78		5,354 m
08	GS	ISPT	111.90 MHz	10 nm	90.44	3.00	5,354 ft
				19 km	82.55		5,354 m

KLAS

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 2,180 ft / 664 m
Location: 36.080700 -115.153000
Magnetic Var: 11.044 E

METAR

KLAS 270756Z 20003KT 10SM CLR 26/M04 A2990 RMK AO2 SLP098 T02611039 403500206 \$

TAF

TAF KLAS 270520Z 2706/2812 23008KT P6SM SKC FM271100 VRB05KT P6SM SKC FM271700 08006KT P6SM SKC FM272200 12007KT P

Frequencies

REC - 132.40 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.00 MHz - CLEARANCE DELIVERY	GND - 121.10 MHz - LAS VEGAS GROUND
GND - 121.90 MHz - LAS VEGAS GROUND	TWR - 128.80 MHz - LAS VEGAS TOWER
TWR - 118.75 MHz - LAS VEGAS TOWER	TWR - 119.90 MHz - LAS VEGAS TOWER
APP - 125.60 MHz - LAS VEGAS APPROACH	APP - 125.02 MHz - LAS VEGAS APPROACH
DEP - 125.90 MHz - LAS VEGAS DEPARTURE	DEP - 133.95 MHz - LAS VEGAS DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	151 ft	14,525 ft	89.92	CONCRETE	2,152 ft	0 ft
	46 m	4,427 m	78.88		656 m	0 m
26R	151 ft	14,525 ft	269.95	CONCRETE	1,414 ft	374 ft
	46 m	4,427 m	258.91		431 m	114 m
08R	151 ft	10,535 ft	89.92	CONCRETE	0 ft	381 ft
	46 m	3,211 m	78.88		0 m	116 m
26L	151 ft	10,535 ft	269.94	CONCRETE	0 ft	381 ft
	46 m	3,211 m	258.90		0 m	116 m
01R	151 ft	9,779 ft	24.82	CONCRETE	486 ft	400 ft
	46 m	2,981 m	13.78		148 m	122 m
19L	151 ft	9,779 ft	204.83	CONCRETE	876 ft	394 ft
	46 m	2,981 m	193.79		267 m	120 m
01L	151 ft	8,998 ft	24.82	CONCRETE	584 ft	400 ft
	46 m	2,743 m	13.78		178 m	122 m
19R	151 ft	8,998 ft	204.83	CONCRETE	0 ft	0 ft
	46 m	2,743 m	193.79		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	DME	ICUA	110.10 MHz	18 nm	-	-	2,092 ft
				33 km	-		2,092 m
26R	DME	ILAS	110.30 MHz	18 nm	-	-	2,203 ft
				33 km	-		2,203 m
01L	LOC-ILS	ICUA	110.10 MHz	18 nm	24.83	-	2,180 ft
				33 km	13.79		2,180 m
26L	LOC-ILS	IRLE	111.50 MHz	18 nm	269.93	-	2,180 ft
				33 km	258.89		2,180 m
26R	LOC-ILS	ILAS	110.30 MHz	18 nm	269.94	-	2,180 ft
				33 km	258.90		2,180 m
01L	GS	ICUA	110.10 MHz	10 nm	24.83	3.40	2,180 ft
				19 km	13.79		2,180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	GS	IRLE	111.50 MHz	10 nm	269.93	3.00	2,180 ft
				19 km	258.89		2,180 m
26R	GS	ILAS	110.30 MHz	10 nm	269.94	3.00	2,180 ft
				19 km	258.90		2,180 m