

LIPK

Forlì "Luigi Ridolfi"


LICJ

Palermo-Punta Raisi "Falcone e Borsellino"

2024/05/04 0017Z

LIPK GIKIN **Q789** PNZ **M726** DORAS LICJ

369.34 nm / 684.02 km

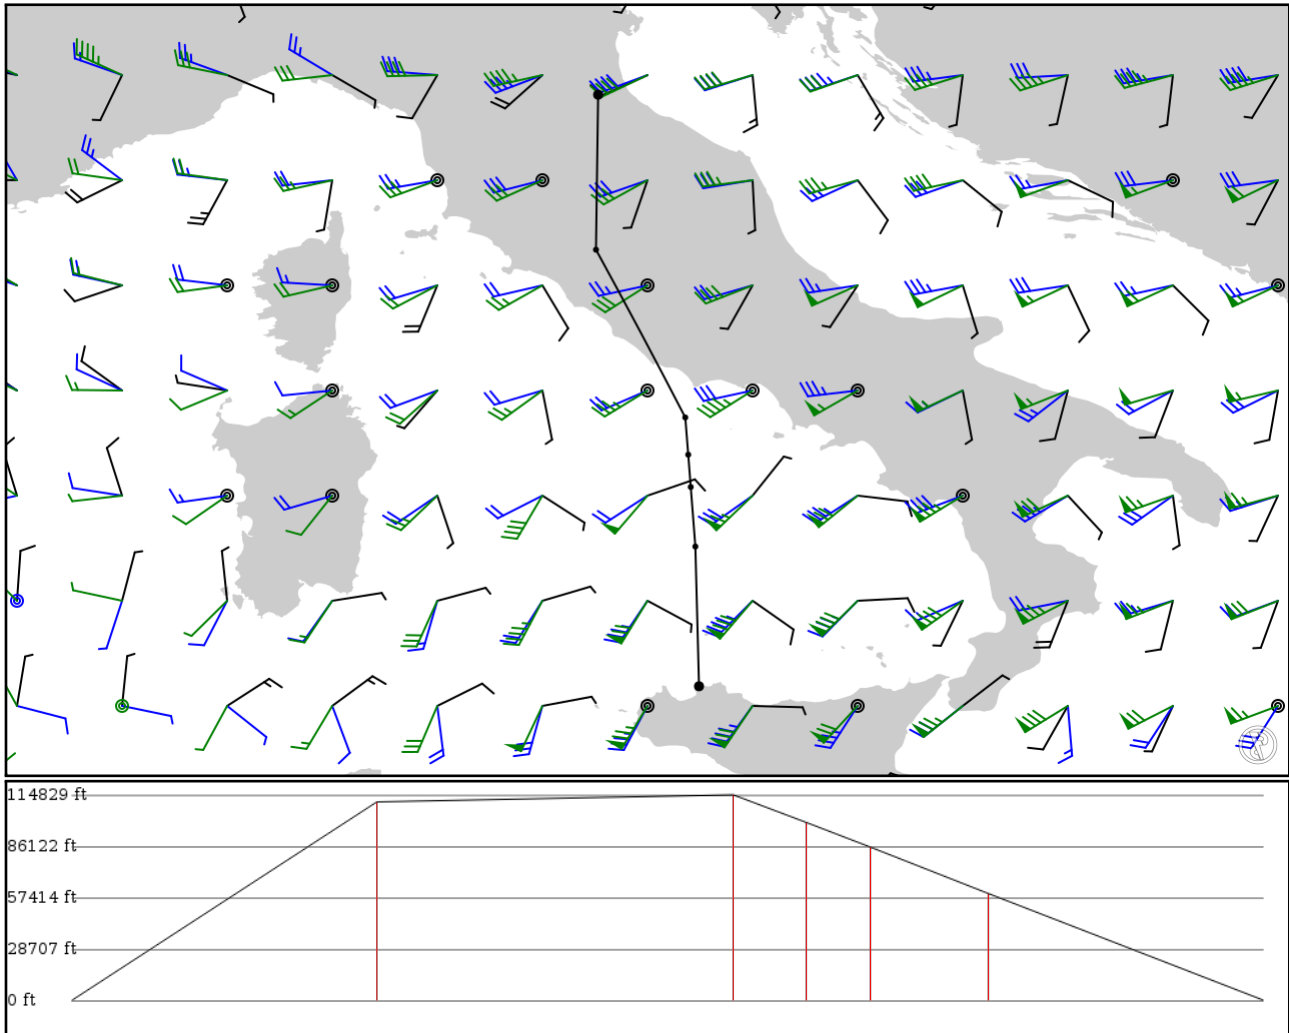

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident		Via	Lat	Alt	Dist	Name
Type			Lon		(nm)	
LIPK	-	44.19490	0 ft	-	Forli	"Luigi Ridolfi"
APT	-	12.07050	0 m			
GIKIN	-	42.61830	33,800 ft	94	-	
FIX	-	12.04860	10,302 m			
PNZ	Q789	40.91190	35,000 ft	110	PONZA	
VOR	AWY-HI	12.95740	10,668 m			
ENSOT	M726	40.53330	30,300 ft	22	-	
FIX	AWY-LO	12.98750	9,235 m			
BEROL	M726	40.20470	26,100 ft	19	-	
FIX	AWY-LO	13.01310	7,955 m			
DORAS	M726	39.59890	18,200 ft	36	-	
FIX	AWY-LO	13.06000	5,547 m			
LICJ	-	38.17750	0 ft	85	Palermo-Punta Raisi	"Falcone e Borsellino"
APT	-	13.09720	0 m			

LIPK

Region: ITALY
Timezone: EUROPE/ROME
Runways: 1

Elevation: 97 ft / 30 m
Location: 44.194900 12.070500
Magnetic Var: 3.770 E

METAR

UNKNOWN

TAF

TAF LIPK 032103Z 0318/0418 CNL

Frequencies

TWR - 118.95 MHz - FORLI TOWER
APP - 118.15 MHz - ROMAGNA RADAR
APP - 124.85 MHz - ROMAGNA RADAR

TWR - 119.75 MHz - FORLI TOWER
APP - 122.10 MHz - ROMAGNA RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	8,388 ft	117.00	ASPHALT	0 ft	0 ft
	45 m	2,557 m	113.23		0 m	0 m
30	148 ft	8,388 ft	297.02	ASPHALT	479 ft	0 ft
	45 m	2,557 m	293.25		146 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	LOC-ILS	FOR	109.70 MHz	18 nm	116.98	-	97 ft
				33 km	113.21		97 m
12	GS	FOR	109.70 MHz	10 nm	116.98	3.33	97 ft
				19 km	113.21		97 m

LICJ

Region: ITALY
Timezone: EUROPE/ROME
Runways: 2

Elevation: 63 ft / 19 m
Location: 38.177500 13.097200
Magnetic Var: 3.572 E

METAR

LICJ 032350Z 20011KT CAVOK 16/10 Q1017

TAF

TAF LICJ 032300Z 0400/0424 26014KT 9999 FEW020 BECMG 0416/0418 VRB05KT

Frequencies

GND - 121.62 MHz - RAISI GROUND
APP - 120.20 MHz - PALERMO APPROACH
REC - 123.87 MHz - ATIS

TWR - 119.05 MHz - RAISI TOWER
APP - 118.65 MHz - PALERMO APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	148 ft	6,791 ft	23.79	ASPHALT	0 ft	0 ft
	45 m	2,070 m	20.22		0 m	0 m
20	148 ft	6,791 ft	203.80	ASPHALT	0 ft	0 ft
	45 m	2,070 m	200.23		0 m	0 m
07	197 ft	10,922 ft	66.82	ASPHALT	404 ft	577 ft
	60 m	3,329 m	63.25		123 m	176 m
25	197 ft	10,922 ft	246.84	ASPHALT	669 ft	302 ft
	60 m	3,329 m	243.27		204 m	92 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
20	DME	ITO	110.55 MHz	18 nm	-	-	38 ft
				33 km	-		38 m
25	DME	RAI	109.50 MHz	18 nm	-	-	65 ft
				33 km	-		65 m
20	LOC-ILS	ITO	110.55 MHz	18 nm	203.92	-	64 ft
				33 km	200.35		64 m
25	LOC-ILS	RAI	109.50 MHz	18 nm	246.80	-	64 ft
				33 km	243.23		64 m
20	GS	ITO	110.55 MHz	10 nm	203.92	3.00	64 ft
				19 km	200.35		64 m
25	GS	RAI	109.50 MHz	10 nm	246.80	3.00	64 ft
				19 km	243.23		64 m