

KATL

Hartsfield-Jackson Atlanta Intl


KCLT

Charlotte Douglas Intl

2024/05/08 0819Z

KATL MPASS ZELAN SMOGG PHIIL CNTLR KCLT

226.81 nm / 420.04 km

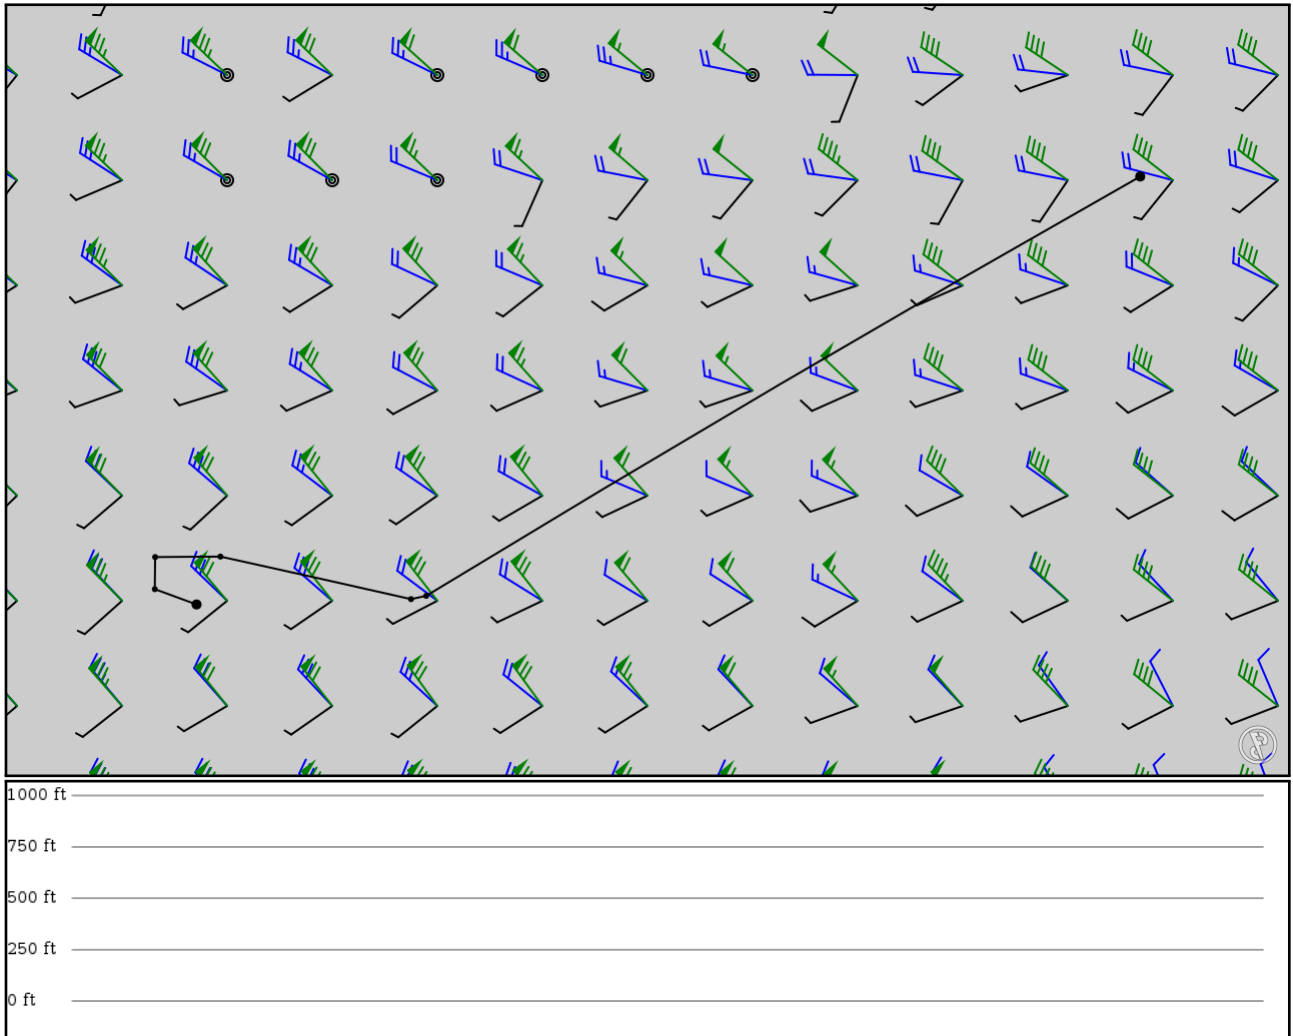

Notes

Requested: KATL MPASS ZELAN SMOGG PHIIL LAGGR MULSN HRTWL CNTLR KCLT

Unmatched points: HRTWL

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KATL APT	-	33.63660 -84.42800	0 ft 0 m	-	Hartsfield-Jackson Atlanta Intl
MPASS FIX	-	33.69300 -84.58200	0 ft 0 m	8	-
ZELAN FIX	-	33.81130 -84.58070	0 ft 0 m	7	-
SMOGG FIX	-	33.81310 -84.34000	0 ft 0 m	12	-
PHIIL FIX	-	33.65630 -83.63720	0 ft 0 m	36	-
CNTRLR FIX	-	33.66840 -83.58120	0 ft 0 m	2	-
KCLT APT	-	35.21380 -80.94850	0 ft 0 m	160	Charlotte Douglas Intl

KATL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 5

Elevation: 1,026 ft / 313 m
Location: 33.636600 -84.428000
Magnetic Var: 5.630 W

METAR

KATL 080752Z 24007KT 10SM FEW050 FEW250 23/19 A2984 RMK A02 SLP094 T02330189

TAF

TAF AMD KATL 080744Z 0808/0912 24009KT P6SM SCT050 SCT080 FM081000 24005KT P6SM SCT008 BKN012 TEMPO 0811/0815 BKN012

Frequencies

REC - 119.65 MHz - D-ATIS	REC - 125.55 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 121.65 MHz - ATLANTA GROUND	GND - 121.75 MHz - ATLANTA GROUND
GND - 121.90 MHz - ATLANTA GROUND	TWR - 119.10 MHz - ATLANTA TOWER
TWR - 119.30 MHz - ATLANTA TOWER	TWR - 119.50 MHz - ATLANTA TOWER
TWR - 123.85 MHz - ATLANTA TOWER	TWR - 125.32 MHz - ATLANTA TOWER
APP - 127.90 MHz - ATLANTA APPROACH	APP - 128.00 MHz - ATLANTA APPROACH
DEP - 125.65 MHz - ATLANTA DEPARTURE	DEP - 125.70 MHz - ATLANTA DEPARTURE
DEP - 135.37 MHz - ATLANTA DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	151 ft	12,400 ft	89.99	CONCRETE	0 ft	0 ft
	46 m	3,780 m	95.62		0 m	0 m
27R	151 ft	12,400 ft	270.01	CONCRETE	518 ft	0 ft
	46 m	3,780 m	275.64		158 m	0 m
09R	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
27L	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08L	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
26R	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
10	151 ft	9,008 ft	89.97	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.60		0 m	0 m
28	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08R	151 ft	10,009 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	95.61		0 m	0 m
26L	151 ft	10,009 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	3,051 m	275.62		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IHFW	109.30 MHz	18 nm	-	-	993 ft
				33 km	-		993 m
08R	DME	IATL	109.90 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IHZK	110.50 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
09R	DME	IFUN	108.90 MHz	18 nm	-	-	987 ft
				33 km	-		987 m
10	DME	IOMO	111.55 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
26L	DME	IBRU	108.70 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m
26R	DME	IGXZ	110.10 MHz	18 nm	-	-	1,000 ft
				33 km	-		1,000 m
27L	DME	IFSQ	108.50 MHz	18 nm	-	-	1,020 ft
				33 km	-		1,020 m
27R	DME	IAFA	111.30 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
28	DME	IPKU	111.75 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
08L	LOC-ILS	IHFV	109.30 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
08R	LOC-ILS	IATL	109.90 MHz	18 nm	89.99	-	1,026 ft
				33 km	95.62		1,026 m
09L	LOC-ILS	IHZK	110.50 MHz	18 nm	90.01	-	968 ft
				33 km	95.64		968 m
09R	LOC-ILS	IFUN	108.90 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
10	LOC-ILS	IOMO	111.55 MHz	18 nm	89.98	-	970 ft
				33 km	95.61		970 m
26L	LOC-ILS	IBRU	108.70 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
26R	LOC-ILS	IGXZ	110.10 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27L	LOC-ILS	IFSQ	108.50 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27R	LOC-ILS	IAFA	111.30 MHz	18 nm	270.00	-	1,026 ft
				33 km	275.62		1,026 m
28	LOC-ILS	IPKU	111.75 MHz	18 nm	269.97	-	970 ft
				33 km	275.60		970 m
08L	GS	IHFV	109.30 MHz	10 nm	90.96	3.00	1,008 ft
				19 km	96.59		1,008 m
08R	GS	IATL	109.90 MHz	10 nm	90.96	3.00	1,012 ft
				19 km	96.59		1,012 m
09L	GS	IHZK	110.50 MHz	10 nm	90.02	3.00	1,017 ft
				19 km	95.65		1,017 m
09R	GS	IFUN	108.90 MHz	10 nm	90.96	3.00	1,021 ft
				19 km	96.59		1,021 m
10	GS	IOMO	111.55 MHz	10 nm	90.94	3.00	985 ft
				19 km	96.57		985 m
26L	GS	IBRU	108.70 MHz	10 nm	270.96	3.00	992 ft
				19 km	276.59		992 m
26R	GS	IGXZ	110.10 MHz	10 nm	270.96	3.00	984 ft
				19 km	276.59		984 m
27L	GS	IFSQ	108.50 MHz	10 nm	270.96	3.00	990 ft
				19 km	276.59		990 m
27R	GS	IAFA	111.30 MHz	10 nm	270.02	3.00	981 ft
				19 km	275.65		981 m
28	GS	IPKU	111.75 MHz	10 nm	270.94	3.00	990 ft
				19 km	276.57		990 m

KCLT

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 748 ft / 228 m
Location: 35.213800 -80.948500
Magnetic Var: 8.054 W

METAR

KCLT 080752Z 24004KT 10SM BKN090 OVC250 22/18 A2980 RMK A02 SLP097 T02220178

TAF

TAF AMD KCLT 080748Z 0808/0912 24006KT P6SM FEW100 BKN120 FM080900 23004KT P6SM BKN110 FM081400 24006KT P6SM SCT100

Frequencies

REC - 121.15 MHz - ATIS (ARRIVAL)	REC - 132.10 MHz - ATIS (DEPARTURE)
COM - 122.95 MHz - UNICOM	CLD - 127.15 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - CHARLOTTE GROUND	GND - 121.90 MHz - CHARLOTTE GROUND
TWR - 133.35 MHz - CHARLOTTE TOWER	TWR - 126.40 MHz - CHARLOTTE TOWER
TWR - 118.10 MHz - CHARLOTTE TOWER	DEP - 134.75 MHz - CHARLOTTE DEPARTURE
DEP - 128.32 MHz - CHARLOTTE DEPARTURE	DEP - 124.00 MHz - CHARLOTTE DEPARTURE
DEP - 120.50 MHz - CHARLOTTE DEPARTURE	DEP - 120.05 MHz - CHARLOTTE DEPARTURE
APP - 134.75 MHz - CHARLOTTE APPROACH	APP - 128.32 MHz - CHARLOTTE APPROACH
APP - 126.15 MHz - CHARLOTTE APPROACH	APP - 124.00 MHz - CHARLOTTE APPROACH
APP - 120.50 MHz - CHARLOTTE APPROACH	APP - 120.05 MHz - CHARLOTTE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18R	151 ft	9,008 ft	175.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	184.04		0 m	0 m
36L	151 ft	9,008 ft	355.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	4.04		0 m	0 m
18C	151 ft	10,009 ft	175.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	184.03		0 m	0 m
36C	151 ft	10,009 ft	355.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	4.03		0 m	0 m
18L	151 ft	8,686 ft	176.00	ASPHALT	0 ft	0 ft
	46 m	2,648 m	184.05		0 m	0 m
36R	151 ft	8,686 ft	356.00	ASPHALT	0 ft	0 ft
	46 m	2,648 m	4.05		0 m	0 m
05	151 ft	7,510 ft	48.35	ASPHALT	0 ft	148 ft
	46 m	2,289 m	56.40		0 m	45 m
23	151 ft	7,510 ft	228.36	ASPHALT	0 ft	148 ft
	46 m	2,289 m	236.41		0 m	45 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18R	DME	IRGS	110.15 MHz	18 nm	-	-	749 ft
				33 km	-		749 m
23	DME	IAPU	109.50 MHz	18 nm	-	-	749 ft
				33 km	-		749 m
36L	DME	IXUU	110.15 MHz	18 nm	-	-	749 ft
				33 km	-		749 m
36R	DME	IBQC	108.90 MHz	18 nm	-	-	749 ft
				33 km	-		749 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05	LOC-ILS	ICLT	110.95 MHz	18 nm	48.37	-	749 ft
				33 km	56.42		749 m
18C	LOC-ILS	IPEP	111.30 MHz	18 nm	175.98	-	748 ft
				33 km	184.03		748 m
18L	LOC-ILS	IVKQ	110.35 MHz	18 nm	176.00	-	748 ft
				33 km	184.05		748 m
18R	LOC-ILS	IRGS	110.15 MHz	18 nm	175.98	-	748 ft
				33 km	184.03		748 m
23	LOC-ILS	IAPU	109.50 MHz	18 nm	228.35	-	748 ft
				33 km	236.40		748 m
36C	LOC-ILS	IDQG	111.70 MHz	18 nm	355.98	-	748 ft
				33 km	4.03		748 m
36L	LOC-ILS	IXUU	110.15 MHz	18 nm	355.98	-	748 ft
				33 km	4.03		748 m
36R	LOC-ILS	IBQC	108.90 MHz	18 nm	356.00	-	748 ft
				33 km	4.05		748 m
05	GS	ICLT	110.95 MHz	10 nm	48.35	3.00	748 ft
				19 km	56.40		748 m
18C	GS	IPEP	111.30 MHz	10 nm	175.98	3.00	748 ft
				19 km	184.03		748 m
18L	GS	IVKQ	110.35 MHz	10 nm	176.00	3.00	748 ft
				19 km	184.05		748 m
18R	GS	IRGS	110.15 MHz	10 nm	175.98	3.00	748 ft
				19 km	184.03		748 m
23	GS	IAPU	109.50 MHz	10 nm	228.35	3.00	748 ft
				19 km	236.40		748 m
36C	GS	IDQG	111.70 MHz	10 nm	355.98	3.00	748 ft
				19 km	4.03		748 m
36L	GS	IXUU	110.15 MHz	10 nm	355.98	3.00	748 ft
				19 km	4.03		748 m
36R	GS	IBQC	108.90 MHz	10 nm	356.00	3.00	748 ft
				19 km	4.05		748 m