


2024/05/29 0247Z

GMMX PELAX GMMN

108.18 nm / 200.34 km

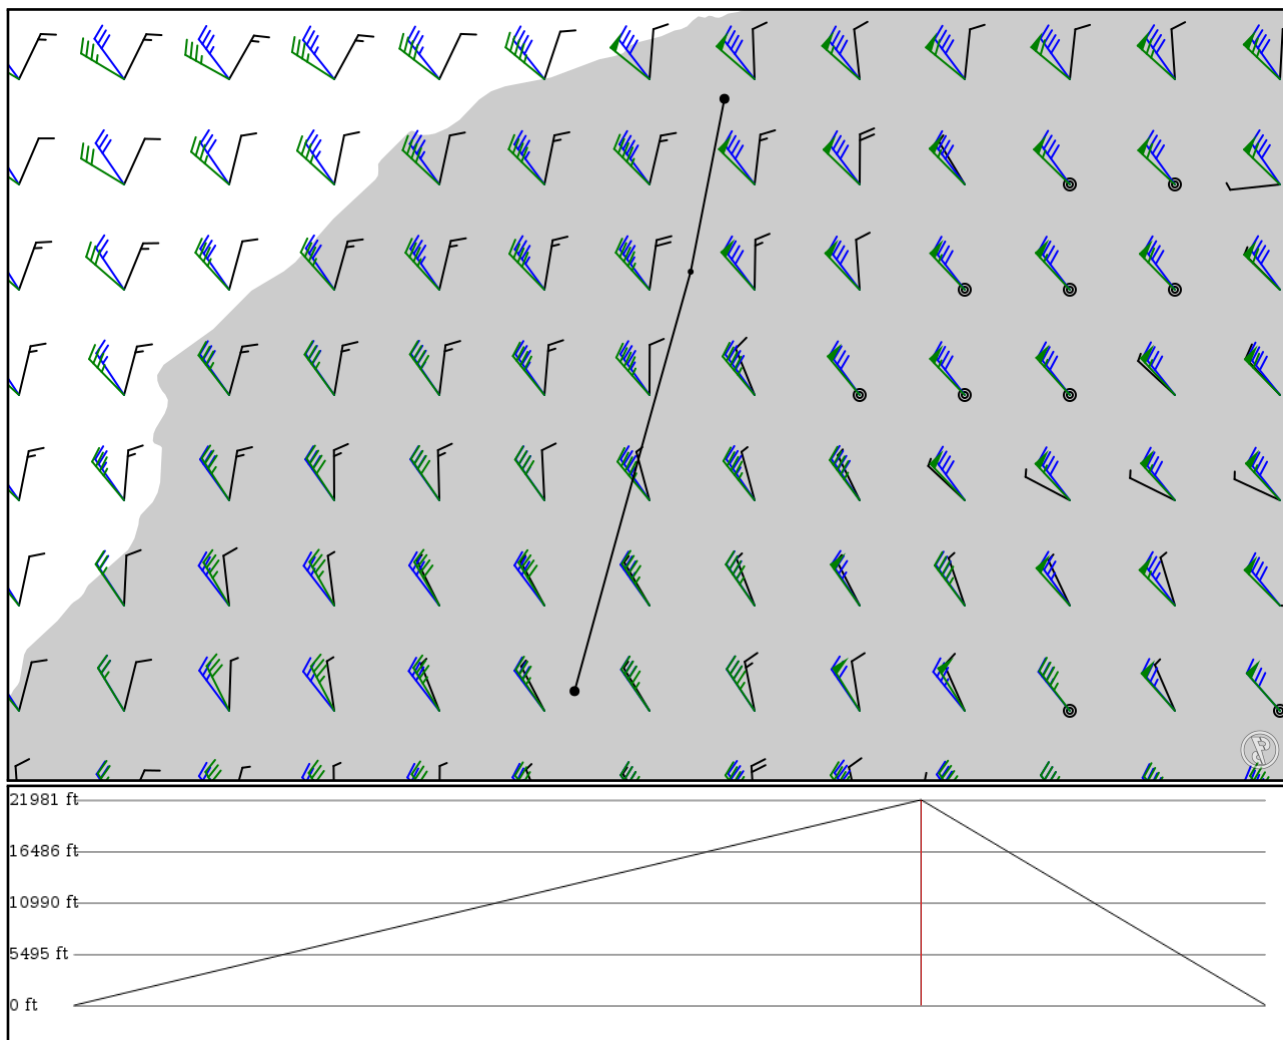

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
GMMX	-	31.60690	0 ft	-	MENARA
APT	-	-8.03627	0 m		
PELAX	-	32.85360	6,700 ft	76	-
FIX	-	-7.69050	2,042 m		
GMMN	-	33.36740	0 ft	31	Casablanca Mohammed V Intl
APT	-	-7.58998	0 m		

GMMX

Region: MOROCCO
Timezone: AFRICA/CASABLANCA
Runways: 1

Elevation: 1,544 ft / 471 m
Location: 31.606900 -8.036270
Magnetic Var: 1.291 W

METAR

GMMX 290230Z 26006KT CAVOK 21/12 Q1014 NOSIG

TAF

TAF TAF GMMX 282300Z 2900/3006 26006KT 8000 NSC TEMPO 2915/2921 34016KT SCT030 FEW040CB

Frequencies

TWR - 118.70 MHz - MARRAKECH TWR
REC - 121.95 MHz - MARRAKECH ATIS

APP - 119.70 MHz - MARRAKECH APP
GND - 118.70 MHz - MARRAKECH GND

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	147 ft	10,123 ft	95.92	ASPHALT	0 ft	33 ft
	45 m	3,085 m	97.21		0 m	10 m
28	147 ft	10,123 ft	275.93	ASPHALT	0 ft	20 ft
	45 m	3,085 m	277.22		0 m	6 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	LOC-ILS	MAR	109.70 MHz	18 nm	96.03	-	1,545 ft
				33 km	97.32		1,545 m
10	GS	MAR	109.70 MHz	10 nm	95.92	3.00	1,545 ft
				19 km	97.21		1,545 m

GMMN

Region: MOROCCO
Timezone: AFRICA/CASABLANCA
Runways: 2

Elevation: 655 ft / 200 m
Location: 33.367400 -7.589980
Magnetic Var: 1.096 W

METAR

GMMN 290230Z 36005KT 320V030 8000 BKN006 18/16 Q1013 NOSIG

TAF

TAF GMMN 282300Z 2900/3006 32005KT CAVOK PROB30 TEMPO 2900/2907 3000 BR BKN006 BECMG 2910/2913 34013KT BECMG 2920/

Frequencies

REC - 126.30 MHz - ATIS
APP - 121.30 MHz -

TWR - 118.50 MHz -
GND - 130.60 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17L	148 ft	12,231 ft	163.94	ASPHALT	0 ft	988 ft
	45 m	3,728 m	165.04		0 m	301 m
35R	148 ft	12,231 ft	343.95	ASPHALT	0 ft	1,004 ft
	45 m	3,728 m	345.04		0 m	306 m
17R	148 ft	12,188 ft	163.98	ASPHALT	0 ft	207 ft
	45 m	3,715 m	165.07		0 m	63 m
35L	148 ft	12,188 ft	343.98	ASPHALT	0 ft	223 ft
	45 m	3,715 m	345.08		0 m	68 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
35L	DME	INL	110.70 MHz	18 nm	-	-	656 ft
				33 km	-		656 m
17R	LOC-ILS	CAS	108.30 MHz	18 nm	163.98	-	655 ft
				33 km	165.08		655 m
35L	LOC-ILS	INL	110.70 MHz	18 nm	343.98	-	655 ft
				33 km	345.08		655 m
35R	LOC-ILS	INR	109.90 MHz	18 nm	343.95	-	655 ft
				33 km	345.05		655 m
17R	GS	CAS	108.30 MHz	10 nm	163.98	3.00	655 ft
				19 km	165.08		655 m
35L	GS	INL	110.70 MHz	10 nm	343.98	3.00	655 ft
				19 km	345.08		655 m
35R	GS	INR	109.90 MHz	10 nm	343.95	2.70	655 ft
				19 km	345.05		655 m