

KDTW

Detroit Metro Wayne Co


KMIA

Miami Intl

2024/05/04 0946Z

KDTW KIRBY V45 APE J83 SPA J53 CRG J113 LLNCH KMIA

1006.04 nm / 1863.19 km

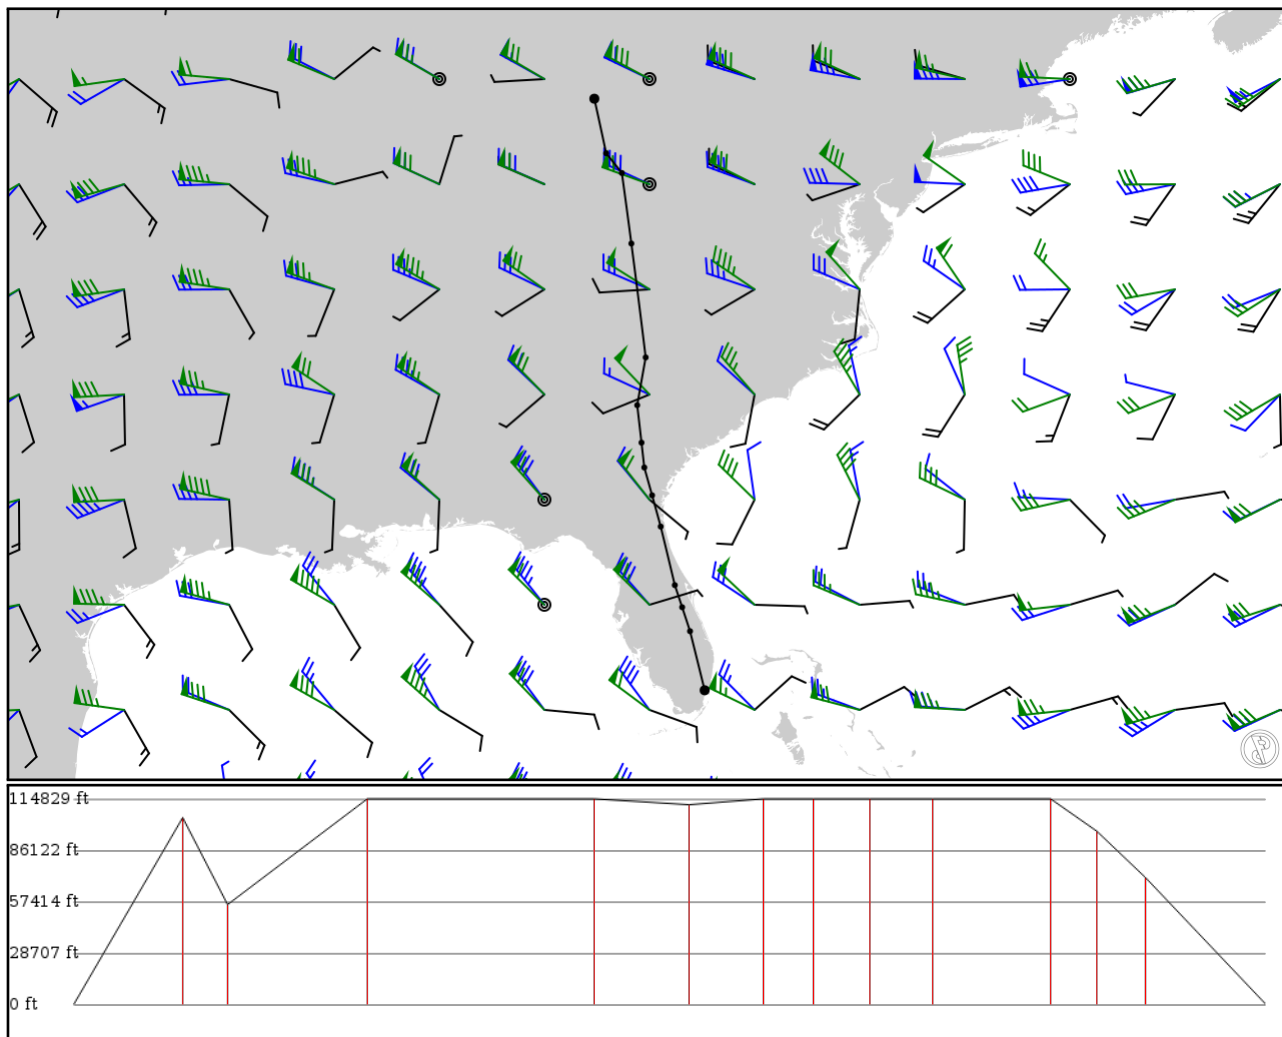

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KDTW	-	42.21220	0 ft	-	Detroit Metro Wayne Co
APT	-	-83.35259	0 m	-	
KIRBY	-	40.69823	31,800 ft	92	-
FIX	-	-83.02430	9,693 m	-	
APE	V45	40.15106	17,000 ft	38	APPLETON VORTAC
VOR	AWY-LO	-82.58831	5,182 m	-	
SPAYD	J83	38.19349	35,000 ft	118	-
FIX	AWY-HI	-82.32464	10,668 m	-	
SPA	J83	35.03364	35,000 ft	190	SPARTANBURG VORTAC
VOR	AWY-HI	-81.92700	10,668 m	-	
IRQ	J53	33.70736	34,000 ft	80	COLLIERS VORTAC
VOR	AWY-HI	-82.16206	10,363 m	-	
GRADY	J53	32.66776	35,000 ft	62	-
FIX	AWY-HI	-82.04293	10,668 m	-	
DUNKN	J53	31.97829	35,000 ft	41	-
FIX	AWY-HI	-81.96544	10,668 m	-	
NOWAY	J53	31.20655	35,000 ft	47	-
FIX	AWY-HI	-81.74899	10,668 m	-	
CRG	J53	30.33889	35,000 ft	53	CRAIG VORTAC
VOR	AWY-HI	-81.50992	10,668 m	-	
DRUDJ	J113	28.71382	35,000 ft	99	-
FIX	AWY-HI	-81.11827	10,668 m	-	
DEARY	J113	28.10070	29,500 ft	38	-
FIX	AWY-HI	-80.91428	8,992 m	-	
LLNCH	J113	27.43546	21,600 ft	41	-
FIX	AWY-HI	-80.69568	6,584 m	-	
KMIA	-	25.79617	0 ft	100	Miami Intl
APT	-	-80.28974	0 m	-	

KDTW

Region: UNITED STATES
Timezone: AMERICA/DETROIT
Runways: 6

Elevation: 645 ft / 197 m
Location: 42.212200 -83.352600
Magnetic Var: 7.490 W

METAR

KDTW 040853Z 05003KT 9SM SCT024 BKN075 OVC230 14/12 A3005 RMK A02 SLP175 T01390122 55002

TAF

KDTW 040852Z 0409/0512 04005KT P6SM BKN250 TEMPO 0411/0414 5SM BR BKN008 FM041400 11007KT P6SM BKN250 FM041700 14007KT

Frequencies

REC - 118.12 MHz - ATIS	REC - 133.67 MHz - ATIS
COM - 122.95 MHz - UNICOM	CLD - 120.65 MHz - CLEARANCE DELIVERY
GND - 119.25 MHz - METRO GROUND	GND - 119.45 MHz - METRO GROUND
GND - 121.80 MHz - METRO GROUND	GND - 132.72 MHz - METRO GROUND
TWR - 118.40 MHz - METRO TOWER	TWR - 128.12 MHz - METRO TOWER
TWR - 128.75 MHz - METRO TOWER	TWR - 135.00 MHz - METRO TOWER
APP - 124.05 MHz - DETROIT APPROACH	APP - 125.15 MHz - DETROIT APPROACH
DEP - 118.95 MHz - DETROIT DEPARTURE	DEP - 125.52 MHz - DETROIT DEPARTURE
DEP - 132.02 MHz - DETROIT DEPARTURE	DEP - 134.30 MHz - DETROIT DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	200 ft	12,011 ft	28.61	CONCRETE	512 ft	397 ft
	61 m	3,661 m	36.10		156 m	121 m
22L	200 ft	12,011 ft	208.63	CONCRETE	0 ft	433 ft
	61 m	3,661 m	216.12		0 m	132 m
03R	151 ft	10,005 ft	28.61	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.10		0 m	122 m
21L	151 ft	10,005 ft	208.62	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.11		0 m	122 m
04L	151 ft	10,003 ft	28.58	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.07		0 m	122 m
22R	151 ft	10,003 ft	208.59	CONCRETE	0 ft	400 ft
	46 m	3,049 m	216.08		0 m	122 m
09L	151 ft	8,687 ft	88.70	CONCRETE	0 ft	400 ft
	46 m	2,648 m	96.19		0 m	122 m
27R	151 ft	8,687 ft	268.72	CONCRETE	0 ft	400 ft
	46 m	2,648 m	276.21		0 m	122 m
03L	150 ft	8,505 ft	28.62	CONCRETE	0 ft	400 ft
	46 m	2,592 m	36.11		0 m	122 m
21R	150 ft	8,505 ft	208.63	CONCRETE	0 ft	397 ft
	46 m	2,592 m	216.12		0 m	121 m
09R	151 ft	8,480 ft	88.71	CONCRETE	0 ft	400 ft
	46 m	2,585 m	96.20		0 m	122 m
27L	151 ft	8,480 ft	268.73	CONCRETE	0 ft	400 ft
	46 m	2,585 m	276.22		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
--------	------	-------	-----------	-------	-------------------------	-------	-----------

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHJT	111.95 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
04R	DME	IDTW	110.70 MHz	18 nm	-	-	650 ft
				33 km	-		650 m
22L	DME	IDWC	110.70 MHz	18 nm	-	-	646 ft
				33 km	-		646 m
03R	LOC-ILS	IHUU	111.50 MHz	18 nm	28.62	-	645 ft
				33 km	36.11		645 m
04L	LOC-ILS	IHJT	111.95 MHz	18 nm	28.59	-	645 ft
				33 km	36.08		645 m
04R	LOC-ILS	IDTW	110.70 MHz	18 nm	28.63	-	645 ft
				33 km	36.12		645 m
21L	LOC-ILS	IEJR	111.50 MHz	18 nm	208.62	-	645 ft
				33 km	216.11		645 m
22L	LOC-ILS	IDWC	110.70 MHz	18 nm	208.63	-	645 ft
				33 km	216.12		645 m
22R	LOC-ILS	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
27L	LOC-ILS	IEPA	110.15 MHz	18 nm	268.72	-	645 ft
				33 km	276.21		645 m
27R	LOC-ILS	IDMI	108.50 MHz	18 nm	268.71	-	645 ft
				33 km	276.20		645 m
22R	LOC-LOC	IJKI	111.95 MHz	18 nm	208.59	-	645 ft
				33 km	216.08		645 m
03R	GS	IHUU	111.50 MHz	10 nm	28.62	3.00	645 ft
				19 km	36.11		645 m
04L	GS	IHJT	111.95 MHz	10 nm	28.59	3.00	645 ft
				19 km	36.08		645 m
04R	GS	IDTW	110.70 MHz	10 nm	28.63	3.00	645 ft
				19 km	36.12		645 m
21L	GS	IEJR	111.50 MHz	10 nm	208.62	3.00	645 ft
				19 km	216.11		645 m
22L	GS	IDWC	110.70 MHz	10 nm	208.63	2.85	645 ft
				19 km	216.12		645 m
22R	GS	IJKI	111.95 MHz	10 nm	208.59	3.00	645 ft
				19 km	216.08		645 m
27L	GS	IEPA	110.15 MHz	10 nm	268.72	3.00	645 ft
				19 km	276.21		645 m
27R	GS	IDMI	108.50 MHz	10 nm	268.71	3.00	645 ft
				19 km	276.20		645 m

KMIA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 11 ft / 3 m
Location: 25.796200 -80.289700
Magnetic Var: 7.272 W

METAR

KMIA 040853Z 11007KT 10SM SCT026 25/21 A2995 RMK AO2 SLP140 T02500206 56006 \$

TAF

KMIA 040835Z 0409/0512 09008KT P6SM SCT030 BKN050 FM041600 10012G22KT P6SM SCT030 FM050200 10009KT P6SM FEW030

Frequencies

REC - 119.15 MHz - D-ATIS
COM - 123.00 MHz - UNICOM
GND - 121.80 MHz - MIAMI GROUND
TWR - 118.30 MHz - MIAMI TOWER
APP - 120.50 MHz - MIAMI APPROACH
APP - 125.75 MHz - MIAMI APPROACH
DEP - 125.50 MHz - MIAMI DEPARTURE

REC - 133.67 MHz - D-ATIS
CLD - 135.35 MHz - CLEARANCE DELIVERY
GND - 127.50 MHz - MIAMI GROUND
TWR - 123.90 MHz - MIAMI TOWER
APP - 124.85 MHz - MIAMI APPROACH
DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.64		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.66		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.65		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.66		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.65		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.66		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.88		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.89		289 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.64		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.64		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.87		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.64		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.64		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.87		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.63		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.63		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.64		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.64		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.87		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.64		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.64		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.87		4 m