


2024/05/22 0351Z

EHRD PEVAD EGSS

155.90 nm / 288.72 km

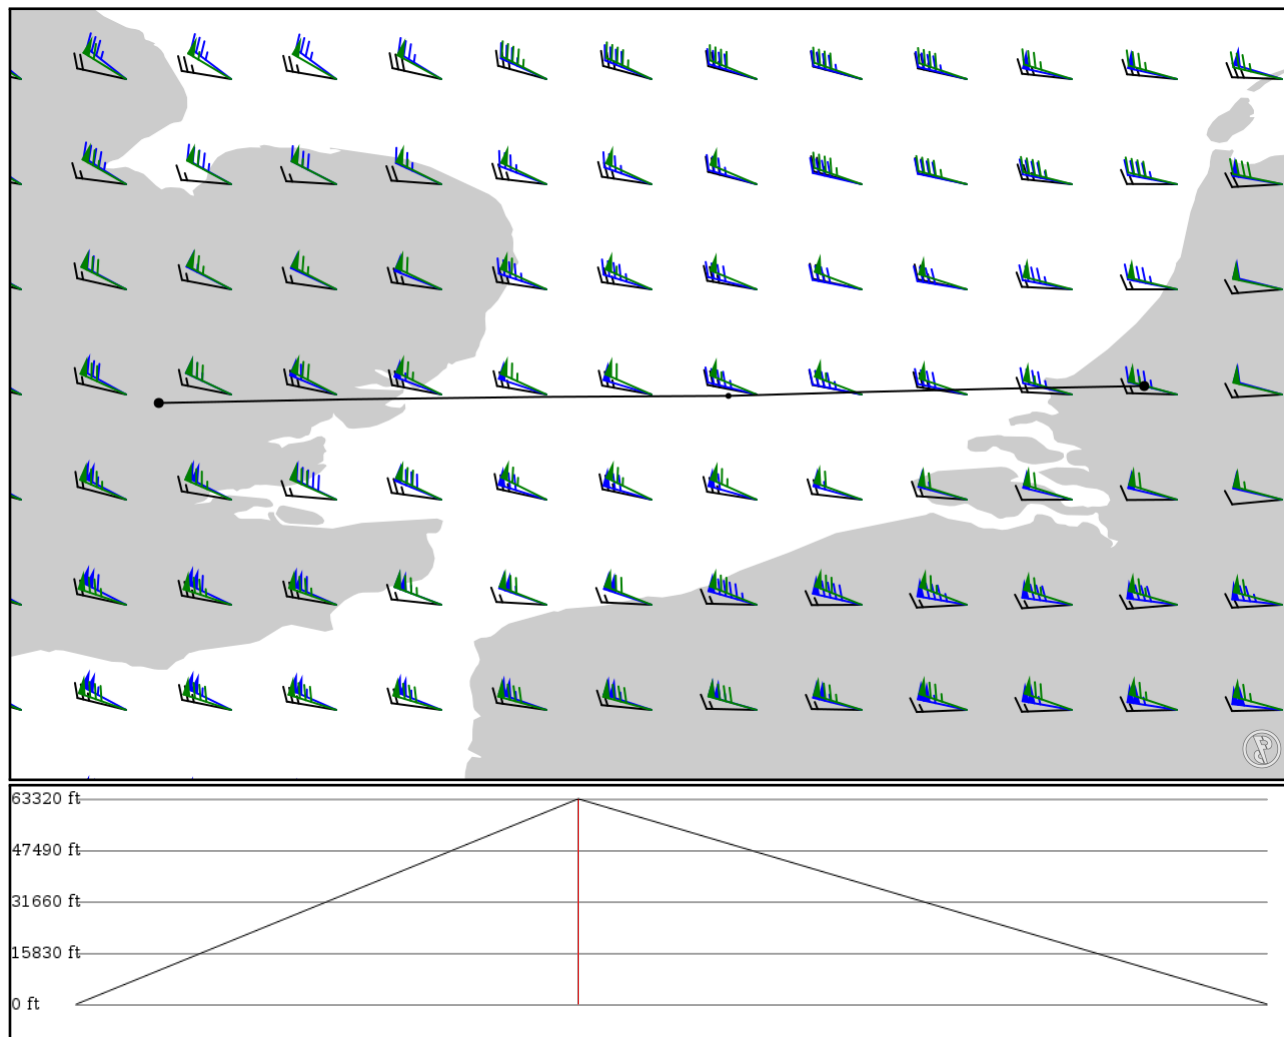

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EHRD	-	51.95750	0 ft	-	Rotterdam The Hague
APT	-	4.44169	0 m		
PEVAD	-	51.91540	19,300 ft	65	-
FIX	-	2.66691	5,883 m		
EGSS	-	51.88510	0 ft	90	Stansted
APT	-	0.23499	0 m		

## EHRD

Region: NETHERLANDS  
Timezone: EUROPE/AMSTERDAM  
Runways: 1

Elevation: -15 ft / -5 m  
Location: 51.957500 4.441690  
Magnetic Var: 1.956 E

## METAR

EHRD 220325Z AUTO 24006KT 210V270 6000 FEW006/// SCT010/// BKN013/// 14/14 Q1004 REDZ BECMG BKN006

## TAF

TAF TAF EHRD 212316Z 2200/2306 34005KT 6000 -RA FEW045 PROB30 TEMPO 2200/2204 4000 RA BKN005 BECMG 2201/2204 24010

## Frequencies

TWR - 118.20 MHz - ROTTERDAM TOWER  
REC - 110.40 MHz - ROTTERDAM ATIS  
GND - 122.17 MHz - ROTTERDAM GROUND

APP - 127.02 MHz - ROTTERDAM APPROACH  
CLD - 128.80 MHz - ROTTERDAM DELIVERY

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	7,198 ft	57.03	ASPHALT	643 ft	0 ft
	45 m	2,194 m	55.07		196 m	0 m
24	148 ft	7,198 ft	237.05	ASPHALT	646 ft	0 ft
	45 m	2,194 m	235.09		197 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	ROS	110.90 MHz	18 nm	-	-	-15 ft
				33 km	-		-15 m
24	DME	RSV	110.90 MHz	18 nm	-	-	-15 ft
				33 km	-		-15 m
06	LOC-ILS	ROS	109.10 MHz	18 nm	56.94	-	-15 ft
				33 km	54.99		-15 m
24	LOC-ILS	RSV	110.90 MHz	18 nm	236.94	-	-15 ft
				33 km	234.99		-15 m

## EGSS

Region: UNITED KINGDOM  
Timezone: EUROPE/LONDON  
Runways: 1

Elevation: 348 ft / 106 m  
Location: 51.885100 0.234989  
Magnetic Var: 0.583 E

## METAR

EGSS 220320Z AUTO 33004KT 300V010 6000 -RA BKN003/// OVC030/// //TCU 13/12 Q1005

## TAF

TAF AMD EGSS 220255Z 2202/2306 32005KT 6000 -RA OVC003 TEMPO 2202/2207 4000 RA BR PROB40 2202/2207 0300 FG OVC001 B

## Frequencies

DEP - 120.62 MHz - ESSEX RADAR	APP - 120.62 MHz - ESSEX RADAR
APP - 132.05 MHz - STANSTED APPROACH	CLD - 121.95 MHz - STANSTED CLEARANCE DELIVERY
GND - 121.72 MHz - STANSTED GROUND	TWR - 123.80 MHz - STANSTED TOWER
TWR - 125.55 MHz - STANSTED TOWER	APP - 136.20 MHz - STANSTED DIRECT
REC - 114.55 MHz - ATIS	REC - 127.17 MHz - ATIS

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	9,984 ft	42.78	ASPHALT	974 ft	0 ft
	46 m	3,043 m	42.20		297 m	0 m
22	151 ft	9,984 ft	222.81	ASPHALT	0 ft	0 ft
	46 m	3,043 m	222.23		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	ISED	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
22	DME	ISX	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
04	LOC-ILS	ISED	110.50 MHz	18 nm	42.80	-	348 ft
				33 km	42.22		348 m
22	LOC-ILS	ISX	110.50 MHz	18 nm	222.80	-	348 ft
				33 km	222.22		348 m
04	GS	ISED	110.50 MHz	10 nm	42.80	3.00	348 ft
				19 km	42.22		348 m
22	GS	ISX	110.50 MHz	10 nm	222.80	3.00	348 ft
				19 km	222.22		348 m