

HKJK

Nairobi-Jomo Kenyatta Intl


HAAB

Bole Intl-Addis Ababa

2024/06/07 1804Z

HKJK APGEP **UM441** LOTAS **UM308** SHALA HAAB

648.69 nm / 1201.37 km

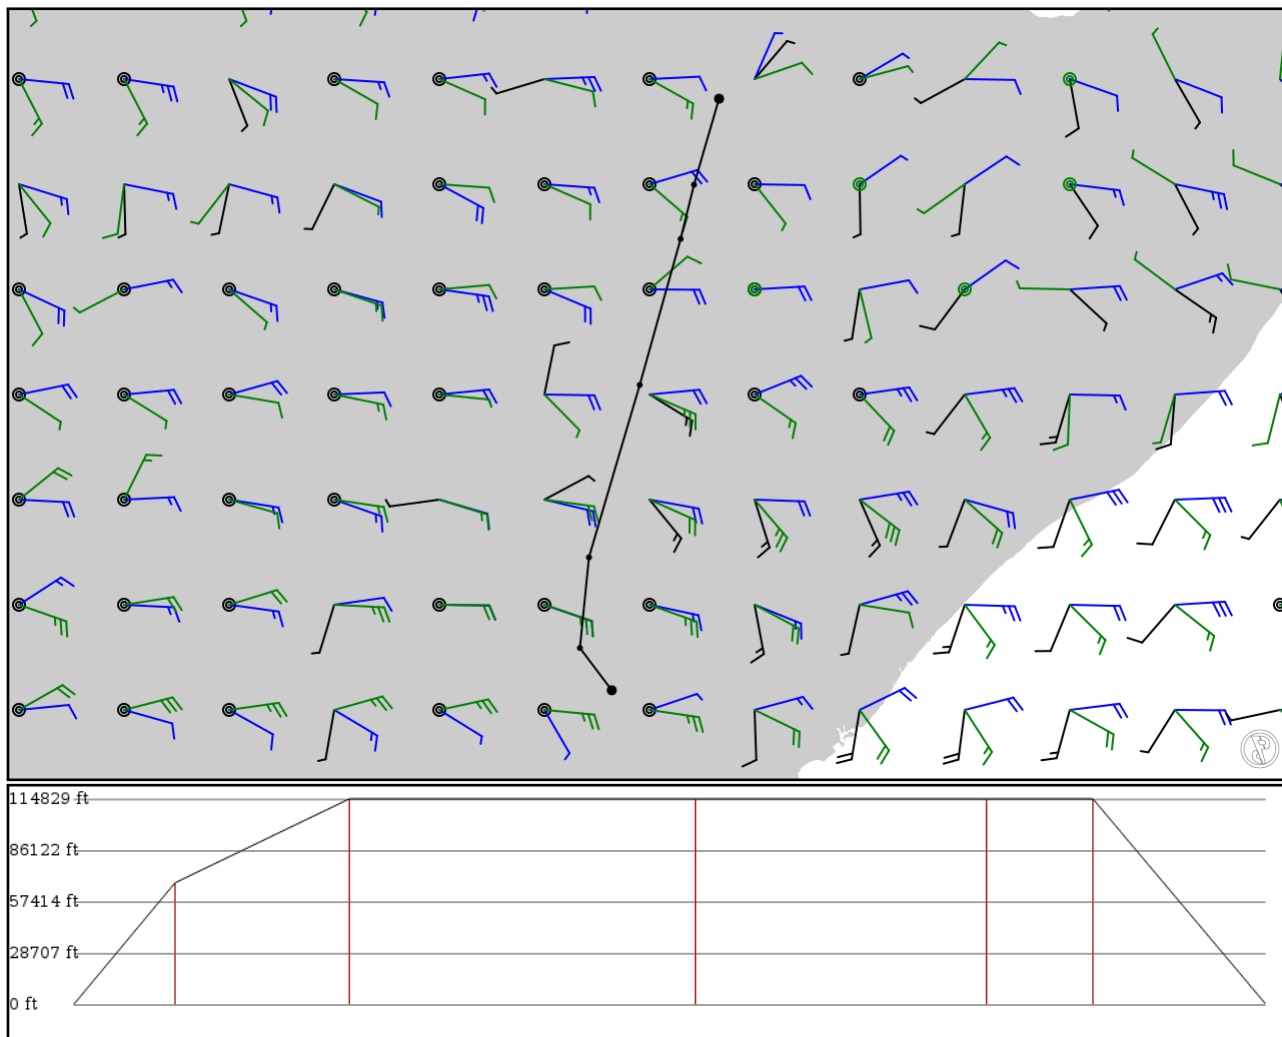

Notes

Basic altitude profile:

- Ascent Rate: 3500ft/min
- Ascent Speed: 285kts
- Cruise Altitude: 35000ft
- Cruise Speed: 560kts
- Descent Rate: 4000ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
HKJK APT	-	-1.31665 36.93130	0 ft 0 m	-	Nairobi-Jomo Kenyatta Intl
APGEP FIX	-	-0.58074 36.37680	20,700 ft 6,309 m	55	-
LOTAS FIX	UM441 AWY-HI	0.99721 36.53420	35,000 ft 10,668 m	95	-
RUDOL FIX	UM308 AWY-HI	3.99667 37.41830	35,000 ft 10,668 m	187	-
OKNET FIX	UM308 AWY-HI	6.53833 38.13000	35,000 ft 10,668 m	158	-
SHALA FIX	UM308 AWY-HI	7.48167 38.36330	35,000 ft 10,668 m	58	-
HAAB APT	-	8.97793 38.79930	0 ft 0 m	93	Bole Intl-Addis Ababa

HKJK

Region: KENYA
Timezone: AFRICA/NAIROBI
Runways: 1

Elevation: 5,330 ft / 1,625 m
Location: -1.316650 36.931300
Magnetic Var: 0.802 E

METAR

HKJK 071730Z 03004KT 9999 BKN023 19/16 Q1024 NOSIG

TAF

TAF HKJK 071100Z 0712/0818 12010KT 9999 BKN025 BECMG 0720/0723 03005K T SCT020 BECMG 0800/0803 21005KT SCT007 BKN023

Frequencies

REC - 126.20 MHz - NAIROBI ATIS
TWR - 118.70 MHz - NAIROBI TOWER
DEP - 119.70 MHz - NAIROBI DEPARTURE
GND - 121.60 MHz - NAIROBI GROUND
APP - 119.70 MHz - NAIROBI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	13,528 ft	53.83	ASPHALT	0 ft	194 ft
	45 m	4,123 m	53.03		0 m	59 m
24	148 ft	13,528 ft	233.83	ASPHALT	0 ft	197 ft
	45 m	4,123 m	233.03		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	NL	110.30 MHz	18 nm	53.83	-	5,330 ft
				33 km	53.03		5,330 m
06	GS	NL	110.30 MHz	10 nm	53.83	3.00	5,330 ft
				19 km	53.03		5,330 m

HAAB

Region: ETHIOPIA
Timezone: AFRICA/ADDIS_ABABA
Runways: 2

Elevation: 7,625 ft / 2,324 m
Location: 8.977930 38.799300
Magnetic Var: 2.573 E

METAR

HAAB 071700Z 13004KT 9999 SCT025 23/06 Q1026

TAF

TAF HAAB 070930Z 0712/0818 12008KT 9999 SCT025 SCT070 BECMG 0715/0720 06006KT BKN060 BECMG 0723/0803 34003KT FEW0

Frequencies

REC - 128.50 MHz - BOLE ATIS
TWR - 118.10 MHz - BOLE TOWER

GND - 121.90 MHz - BOLE GROUND
APP - 119.70 MHz - BOLE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	148 ft	12,456 ft	73.56	ASPHALT	1,175 ft	0 ft
	45 m	3,797 m	70.99		358 m	0 m
25L	148 ft	12,456 ft	253.56	ASPHALT	1,175 ft	0 ft
	45 m	3,797 m	250.99		358 m	0 m
07L	148 ft	12,134 ft	73.56	ASPHALT	817 ft	0 ft
	45 m	3,698 m	70.99		249 m	0 m
25R	148 ft	12,134 ft	253.57	ASPHALT	1,243 ft	0 ft
	45 m	3,698 m	251.00		379 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25L	LOC-ILS	ADS	112.90 MHz	18 nm	253.56	-	7,625 ft
				33 km	250.99		7,625 m