

# PANC

Ted Stevens Anchorage Intl


# PAEN

Kenai Muni

2024/06/05 0321Z

PANC SWANS PAEN

51.16 nm / 94.74 km

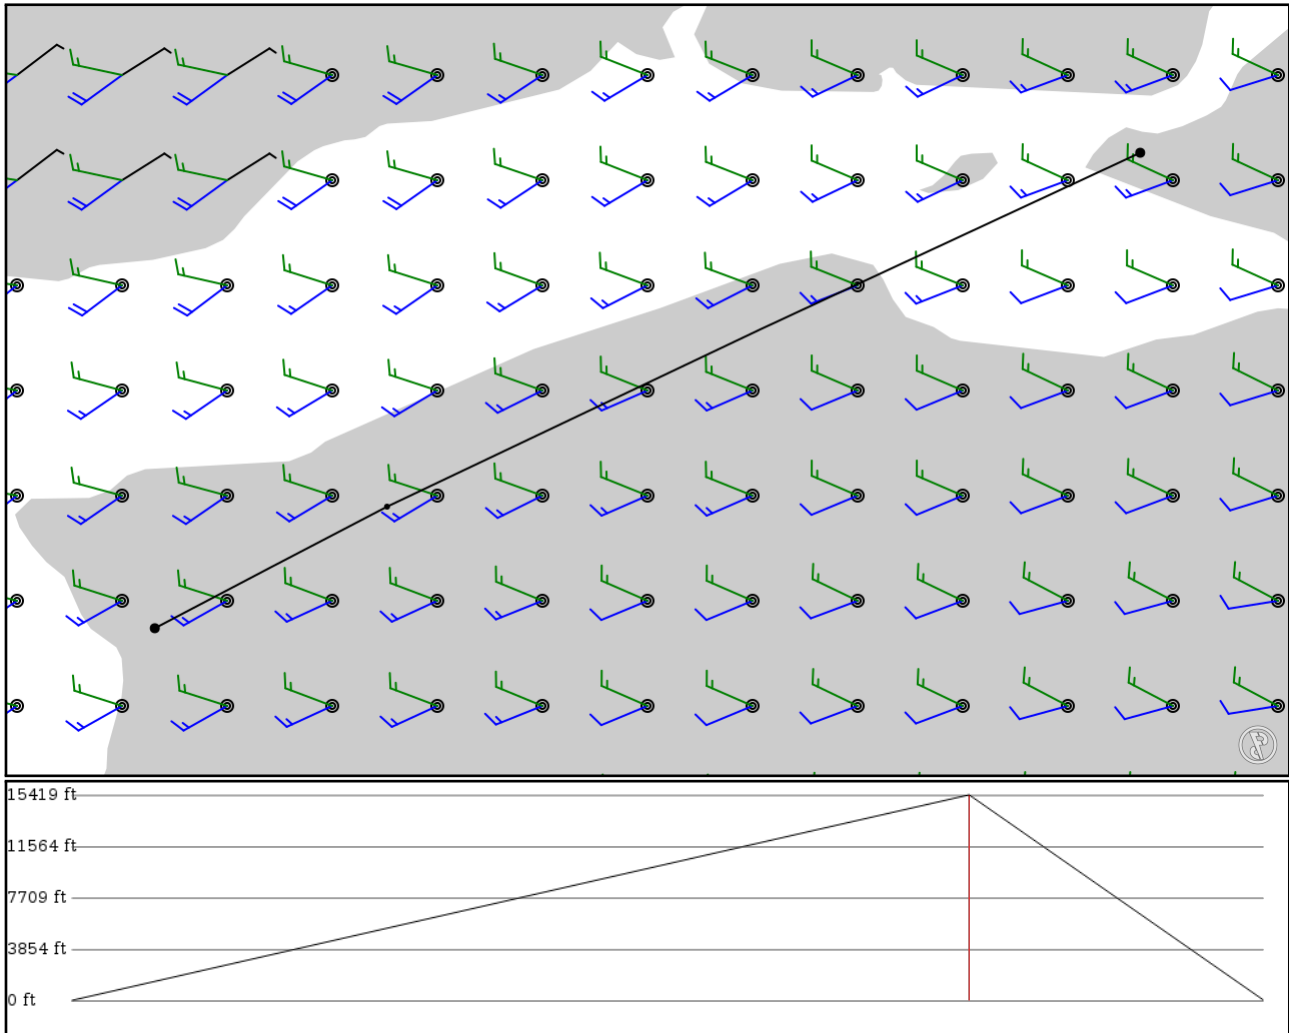

## Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 240kts
- Cruise Altitude: 5000ft
- Cruise Speed: 240kts
- Descent Rate: 1500ft/min
- Descent Speed: 240kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PANC	-	61.17430	0 ft	-	Ted Stevens Anchorage Intl
APT	-	-149.99800	0 m		
SWANS	-	60.72810	4,700 ft	38	-
FIX	-	-150.94800	1,433 m		
PAEN	-	60.57480	0 ft	12	Kenai Muni
APT	-	-151.24100	0 m		

## PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.000 E

## METAR

PANC 050253Z 26007KT 10SM FEW050 SCT200 17/06 A2925

## TAF

PANC 042328Z 0500/0606 27008KT P6SM FEW040 SCT200 FM050600 18008KT P6SM SCT100 BKN200 FM051200 15008KT P6SM -RA S

## Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.84		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.90		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.88		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.93		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.89		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.90		141 m	72 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.90		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.87		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.90		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.90		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.87		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.90		151 m

## PAEN

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 2

Elevation: 99 ft / 30 m

Location: 60.574800 -151.241000

Magnetic Var: 13.564 E

## METAR

PAEN 050253Z 29009KT 10SM SCT120 16/05 A2928

## TAF

TAF PAEN 042328Z 0500/0524 20007KT P6SM FEW050 SCT100 FM051800 21008KT P6SM SCT050 BKN100 OVC200 FM052100 21010KT

## Frequencies

REC - 133.35 MHz - ATIS

GND - 118.75 MHz - KENAI GROUND

COM - 121.30 MHz - CTAF

TWR - 121.30 MHz - KENAI TOWER

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02L	150 ft	7,841 ft	30.99	ASPHALT	282 ft	171 ft
	46 m	2,390 m	17.43		86 m	52 m
20R	150 ft	7,841 ft	211.01	ASPHALT	0 ft	207 ft
	46 m	2,390 m	197.45		0 m	63 m
02R	75 ft	2,006 ft	31.07	GRAVEL	0 ft	0 ft
	23 m	611 m	17.51		0 m	0 m
20L	75 ft	2,006 ft	211.07	GRAVEL	0 ft	0 ft
	23 m	611 m	197.51		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
20R	LOC-ILS	IENA	108.90 MHz	18 nm	211.01	-	99 ft
				33 km	197.45		99 m
20R	GS	IENA	108.90 MHz	10 nm	211.01	3.00	99 ft
				19 km	197.45		99 m