


2024/05/23 0247Z

CYQT YQT93 **V300** VBI **J504** YBR CYBR

428.59 nm / 793.75 km

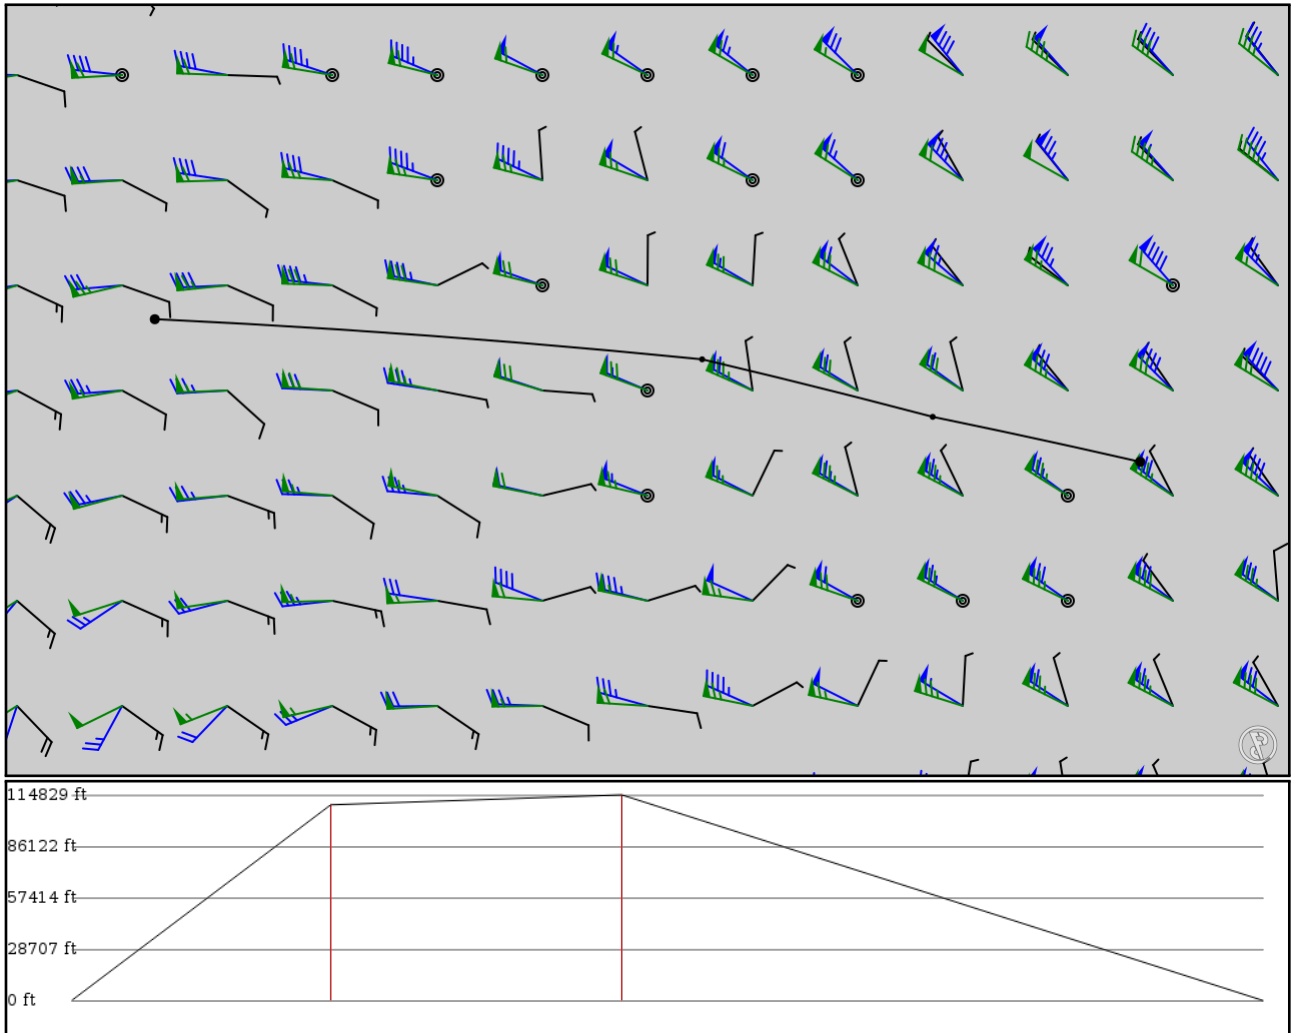

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
CYQT APT	-	48.37220 -89.32420	0 ft 0 m	-	Thunder Bay
YQT93 FIX	-	48.85720 -91.56080	33,300 ft 10,150 m	93	-
VBI VOR	V300 AWY-LO	49.47690 -94.04670	35,000 ft 10,668 m	104	SIOUX NARROWS
YBR VOR	J504 AWY-HI	49.90990 -99.94570	0 ft 0 m	230	BRANDON
CYBR APT	-	49.90890 -99.94730	0 ft 0 m	0	Brandon Municipal Airport

CYQT

Region: CANADA
Timezone: AMERICA/THUNDER_BAY
Runways: 2

Elevation: 652 ft / 199 m
Location: 48.372200 -89.324200
Magnetic Var: 3.925 W

METAR

CYQT 230200Z 27016G27KT 10SM -SHRA SCT025 OVC034 04/02 A2954 RMK SF4SC4 CVCTV CLD EMBD SLP012

TAF

TAF CYQT 230142Z 2302/2314 26012G22KT P6SM SCT020 OVC040 TEMPO 2302/2306 P6SM -SHRA BKN020 OVC040 BECMG 2302/2304

Frequencies

REC - 128.80 MHz - ATIS
TWR - 118.10 MHz -

GND - 121.90 MHz -
APP - 119.20 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	200 ft	7,283 ft	70.48	ASPHALT	0 ft	0 ft
	61 m	2,220 m	74.40		0 m	0 m
25	200 ft	7,283 ft	250.50	ASPHALT	0 ft	0 ft
	61 m	2,220 m	254.42		0 m	0 m
12	200 ft	5,287 ft	121.54	ASPHALT	0 ft	0 ft
	61 m	1,612 m	125.47		0 m	0 m
30	200 ft	5,287 ft	301.56	ASPHALT	0 ft	0 ft
	61 m	1,612 m	305.48		0 m	0 m

Approach Navaids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	LOC-ILS	IQT	109.50 MHz	18 nm	70.49	-	653 ft
				33 km	74.41		653 m
07	GS	IQT	109.50 MHz	10 nm	70.49	3.00	653 ft
				19 km	74.41		653 m

CYBR

Region: CANADA
Timezone: AMERICA/WINNIPEG
Runways: 2

Elevation: 1,342 ft / 409 m
Location: 49.908900 -99.947300
Magnetic Var: 4.737 E

METAR

CYBR 230200Z 05017KT 15SM BKN066 BKN250 12/07 A2977 RMK AC5CI1 SLP094

TAF

TAF CYBR 222340Z 2300/2312 06012G22KT P6SM BKN060 TEMPO 2300/2303 P6SM -SHRA VCTS OVC040CB FM230300 06012KT P6SM O

Frequencies

TWR - 122.10 MHz - CTAF
APP - 285.40 MHz - WINNIPEG CENTER
APP - 132.25 MHz - WINNIPEG CENTER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	150 ft	6,489 ft	90.34	ASPHALT	0 ft	0 ft
	46 m	1,978 m	85.61		0 m	0 m
26	150 ft	6,489 ft	270.37	ASPHALT	0 ft	0 ft
	46 m	1,978 m	265.63		0 m	0 m
14	60 ft	3,003 ft	150.46	GRAVEL	0 ft	0 ft
	18 m	915 m	145.72		0 m	0 m
32	60 ft	3,003 ft	330.46	GRAVEL	0 ft	0 ft
	18 m	915 m	325.73		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	IBR	110.10 MHz	18 nm	-	-	1,343 ft
				33 km	-		1,343 m
08	LOC-ILS	IBR	110.10 MHz	18 nm	90.36	-	1,342 ft
				33 km	85.62		1,342 m
08	GS	IBR	110.10 MHz	10 nm	90.36	3.00	1,342 ft
				19 km	85.62		1,342 m