

# KBWI

Baltimore Washington Intl


# KRDU

Raleigh Durham Intl

2024/05/09 0541Z

KBWI ROOKY V155 FAK V3 CARML KRDU

222.68 nm / 412.40 km

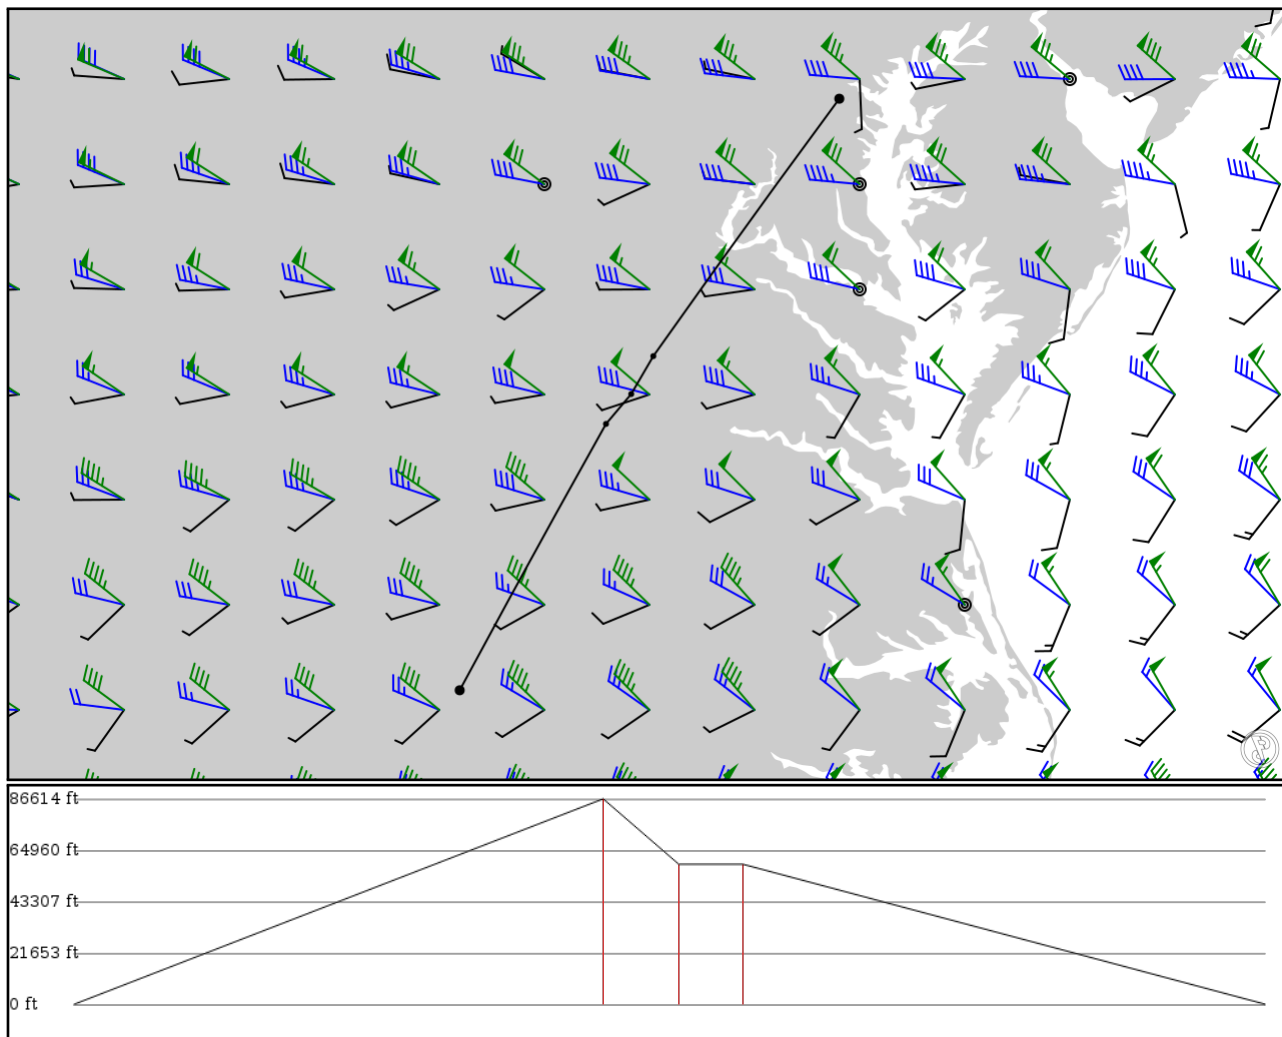

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 25000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KBWI APT	-	39.17601 -76.66682	0 ft 0 m	-	Baltimore Washington Intl
ROOKY FIX	-	37.74008 -77.70486	26,400 ft 8,047 m	99	-
FAK DME	V155 AWY-LO	37.52851 -77.82822	18,000 ft 5,486 m	13	FLAT ROCK VORTAC
CARML FIX	V3 AWY-LO	37.36182 -77.96900	18,000 ft 5,486 m	12	-
KRDU APT	-	35.87586 -78.78560	0 ft 0 m	97	Raleigh Durham Intl

## KBWI

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 3

Elevation: 145 ft / 44 m  
Location: 39.176800 -76.667200  
Magnetic Var: 11.133 W

## METAR

KBWI 090454Z 24004KT 10SM SCT250 19/14 A2969 RMK AO2 SLP054 T01890144 402940178

## TAF

TAF AMD KBWI 090252Z 0903/1006 26007KT P6SM FEW200 FM090900 36003KT P6SM BKN070 FM091600 07007KT P6SM -SHRA OVC050

## Frequencies

REC - 115.10 MHz - BALTIMORE ATIS  
CLD - 118.05 MHz - BALTIMORE CLEARANCE  
TWR - 119.40 MHz - BALTIMORE TOWER  
DEP - 124.55 MHz - POTOMAC DEPARTURE  
COM - 122.95 MHz - BALTIMORE UNICOM  
GND - 121.90 MHz - BALTIMORE GROUND  
APP - 119.00 MHz - POTOMAC APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	150 ft	10,512 ft	94.21	ASPHALT	548 ft	381 ft
	46 m	3,204 m	105.34		167 m	116 m
28	150 ft	10,512 ft	274.23	ASPHALT	699 ft	384 ft
	46 m	3,204 m	285.37		213 m	117 m
15R	150 ft	9,509 ft	144.32	ASPHALT	299 ft	397 ft
	46 m	2,899 m	155.46		91 m	121 m
33L	150 ft	9,509 ft	324.33	ASPHALT	499 ft	197 ft
	46 m	2,899 m	335.47		152 m	60 m
15L	100 ft	5,005 ft	144.33	ASPHALT	0 ft	0 ft
	30 m	1,525 m	155.46		0 m	0 m
33R	100 ft	5,005 ft	324.34	ASPHALT	0 ft	0 ft
	30 m	1,525 m	335.47		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	LOC-ILS	IBAL	109.70 MHz	18 nm	94.22	-	145 ft
				33 km	105.35		145 m
15L	LOC-ILS	IUQC	111.95 MHz	18 nm	144.34	-	145 ft
				33 km	155.47		145 m
15R	LOC-ILS	IFND	111.70 MHz	18 nm	144.33	-	145 ft
				33 km	155.46		145 m
28	LOC-ILS	IOEH	109.70 MHz	18 nm	274.22	-	145 ft
				33 km	285.35		145 m
33L	LOC-ILS	IRUX	111.70 MHz	18 nm	324.34	-	145 ft
				33 km	335.47		145 m
33R	LOC-ILS	IBWI	111.95 MHz	18 nm	324.33	-	145 ft
				33 km	335.46		145 m
10	GS	IBAL	109.70 MHz	10 nm	94.22	3.00	145 ft
				19 km	105.35		145 m
15L	GS	IUQC	111.95 MHz	10 nm	144.34	3.00	145 ft
				19 km	155.47		145 m
15R	GS	IFND	111.70 MHz	10 nm	144.33	3.00	145 ft
				19 km	155.46		145 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	GS	IOEH	109.70 MHz	10 nm	274.22	3.00	145 ft
				19 km	285.35		145 m
33L	GS	IRUX	111.70 MHz	10 nm	324.34	3.00	145 ft
				19 km	335.47		145 m
33R	GS	IBWI	111.95 MHz	10 nm	324.33	3.00	145 ft
				19 km	335.46		145 m

## KRDU

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 3

Elevation: 435 ft / 133 m  
Location: 35.875900 -78.785600  
Magnetic Var: 9.441 W

## METAR

KRDU 090451Z 23006KT 10SM BKN250 21/18 A2980 RMK AO2 SLP086 T02060178 403170206

## TAF

KRDU 082341Z 0900/0924 22006KT P6SM SCT100 FM090900 31011G22KT 4SM -TSRA BR BKN025CB FM091100 18003KT 2SM -TSRA BR

## Frequencies

REC - 123.80 MHz - ATIS	CLD - 120.10 MHz - CLEARANCE DELIVERY
GND - 121.70 MHz - RALEIGH GROUND	GND - 121.90 MHz - RALEIGH GROUND
GND - 130.17 MHz - RAMP CONTROL TERMINAL 2	TWR - 119.30 MHz - RALEIGH TOWER
TWR - 127.45 MHz - RALEIGH TOWER	APP - 127.67 MHz - RALEIGH APPROACH
DEP - 132.35 MHz - RALEIGH DEPARTURE	DEP - 125.30 MHz - RALEIGH DEPARTURE
COM - 122.95 MHz - RALEIGH UNICOM	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14	98 ft	3,573 ft	135.28	ASPHALT	0 ft	0 ft
	30 m	1,089 m	144.72		0 m	0 m
32	98 ft	3,573 ft	315.28	ASPHALT	0 ft	0 ft
	30 m	1,089 m	324.72		0 m	0 m
05R	151 ft	7,507 ft	45.02	ASPHALT	0 ft	197 ft
	46 m	2,288 m	54.46		0 m	60 m
23L	151 ft	7,507 ft	225.03	ASPHALT	0 ft	197 ft
	46 m	2,288 m	234.47		0 m	60 m
05L	151 ft	10,010 ft	45.02	CONCRETE	0 ft	197 ft
	46 m	3,051 m	54.46		0 m	60 m
23R	151 ft	10,010 ft	225.04	CONCRETE	0 ft	194 ft
	46 m	3,051 m	234.48		0 m	59 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	DME	IGKK	109.10 MHz	18 nm	-	-	411 ft
				33 km	-		411 m
23R	DME	IDMP	111.70 MHz	18 nm	-	-	435 ft
				33 km	-		435 m
05L	LOC-ILS	IGKK	109.10 MHz	18 nm	45.03	-	435 ft
				33 km	54.47		435 m
05R	LOC-ILS	IRDU	109.50 MHz	18 nm	45.03	-	435 ft
				33 km	54.47		435 m
23L	LOC-ILS	ILEI	108.50 MHz	18 nm	225.03	-	435 ft
				33 km	234.47		435 m
23R	LOC-ILS	IDMP	111.70 MHz	18 nm	225.03	-	435 ft
				33 km	234.47		435 m
05L	GS	IGKK	109.10 MHz	10 nm	45.03	3.00	435 ft
				19 km	54.47		435 m
05R	GS	IRDU	109.50 MHz	10 nm	45.03	3.00	435 ft
				19 km	54.47		435 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
23L	GS	ILEI	108.50 MHz	10 nm	225.03	3.00	435 ft
				19 km	234.47		435 m
23R	GS	IDMP	111.70 MHz	10 nm	225.03	3.00	435 ft
				19 km	234.47		435 m