

KANE

ANOKA CO BLAINE (Janes Field)


CZVL

Edmonton Villeneuve

2024/06/07 0628Z

KANE MAFLN T330 GFK V430 MOT J483 VLN J475 YWV J576 RYLEY CZVL

981.60 nm / 1817.93 km

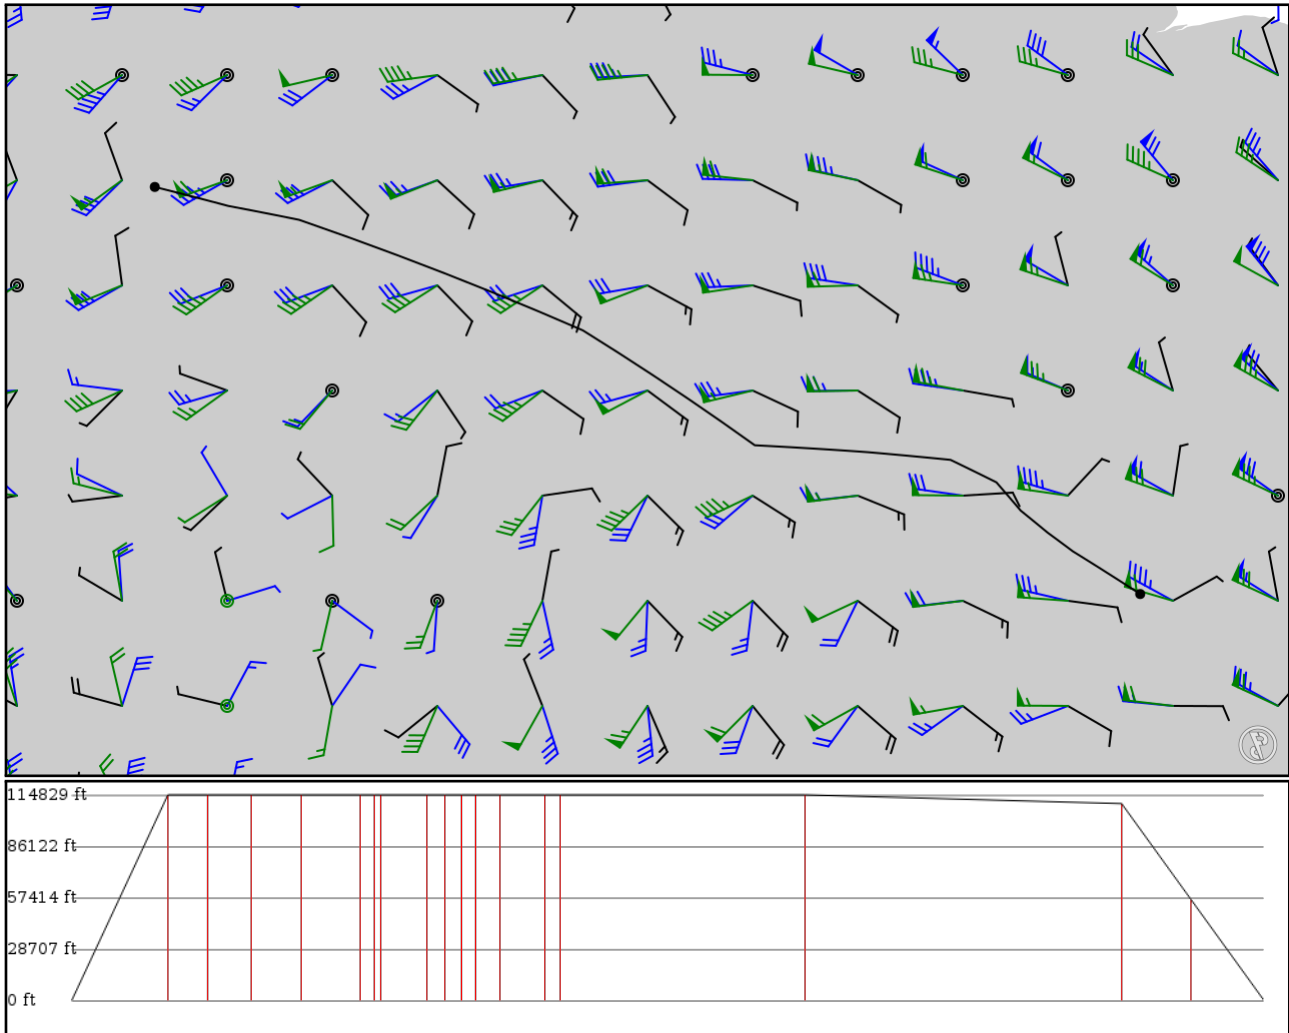

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 312kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KANE APT	-	45.14490 -93.21120	0 ft 0 m	-	ANOKA CO BLAINE (Janes Field)
MAFLN FIX	-	46.03960 -94.62270	35,000 ft 10,668 m	80	-
WATAM FIX	T330 AWY-LO	46.43140 -95.15190	35,000 ft 10,668 m	32	-
TAMMR FIX	T330 AWY-LO	46.89260 -95.71570	35,000 ft 10,668 m	36	-
BYZIN FIX	T330 AWY-LO	47.48440 -96.22450	35,000 ft 10,668 m	41	-
GFK VOR	T330 AWY-LO	47.95480 -97.18540	35,000 ft 10,668 m	48	GRAND FORKS
DITRE FIX	V430 AWY-LO	47.98410 -97.47980	35,000 ft 10,668 m	11	-
BISCA FIX	V430 AWY-LO	47.99600 -97.60260	35,000 ft 10,668 m	4	-
NERDE FIX	V430 AWY-LO	48.08310 -98.54260	35,000 ft 10,668 m	38	-
DVL VOR	V430 AWY-LO	48.11520 -98.91250	35,000 ft 10,668 m	14	DEVILS LAKE
SCULY FIX	V430 AWY-LO	48.13930 -99.25500	35,000 ft 10,668 m	13	-
CAREW FIX	V430 AWY-LO	48.15790 -99.53130	35,000 ft 10,668 m	11	-
BALTA FIX	V430 AWY-LO	48.19070 -100.04800	35,000 ft 10,668 m	20	-
ORMIE FIX	V430 AWY-LO	48.24350 -100.96400	35,000 ft 10,668 m	36	-
MOT VOR	V430 AWY-LO	48.26030 -101.28700	35,000 ft 10,668 m	12	MINOT
VLN VOR	J483 AWY-HI	50.66690 -104.89000	35,000 ft 10,668 m	201	LUMSDEN
YWV VOR	J475 AWY-HI	52.98140 -110.83300	33,500 ft 10,211 m	260	WAINWRIGHT
RYLEY FIX	J576 AWY-HI	53.27270 -112.32000	17,200 ft 5,243 m	56	-
CZVL APT	-	53.67000 -113.85800	0 ft 0 m	59	Edmonton Villeneuve

KANE

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 2

Elevation: 912 ft / 278 m
Location: 45.144900 -93.211200
Magnetic Var: 0.312 W

METAR

KANE 070530Z AUTO 24005KT 10SM CLR 16/09 A2975 RMK A02

TAF

UNKNOWN

Frequencies

REC - 120.62 MHz - ATIS
COM - 122.95 MHz - UNICOM
GND - 121.85 MHz -
APP - 126.50 MHz - MINNEAPOLIS APP/DEP
COM - 126.05 MHz - CTAF
CLD - 121.30 MHz - CLNC DEL
TWR - 126.05 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18	98 ft	4,861 ft	180.60	ASPHALT	0 ft	0 ft
	30 m	1,482 m	180.91		0 m	0 m
36	98 ft	4,861 ft	0.60	ASPHALT	0 ft	0 ft
	30 m	1,482 m	0.91		0 m	0 m
09	75 ft	3,990 ft	90.71	ASPHALT	0 ft	0 ft
	23 m	1,216 m	91.02		0 m	0 m
27	75 ft	3,990 ft	270.72	ASPHALT	0 ft	0 ft
	23 m	1,216 m	271.03		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
27	DME	IANE	111.15 MHz	18 nm	-	-	912 ft
				33 km	-		912 m
27	LOC-ILS	IANE	111.15 MHz	18 nm	270.71	-	912 ft
				33 km	271.03		912 m
27	GS	IANE	111.15 MHz	10 nm	271.43	3.00	912 ft
				19 km	271.74		912 m