

MMMX

Benito Juarez Intl


KMCO

Orlando Intl

2024/06/05 0828Z

MMMX REXES V14 NAU UM580 COFRE M580 XUBNO UM580 IRDOV M580 MINOW M215 KNOST DARBS KMCO

1133.54 nm / 2099.31 km

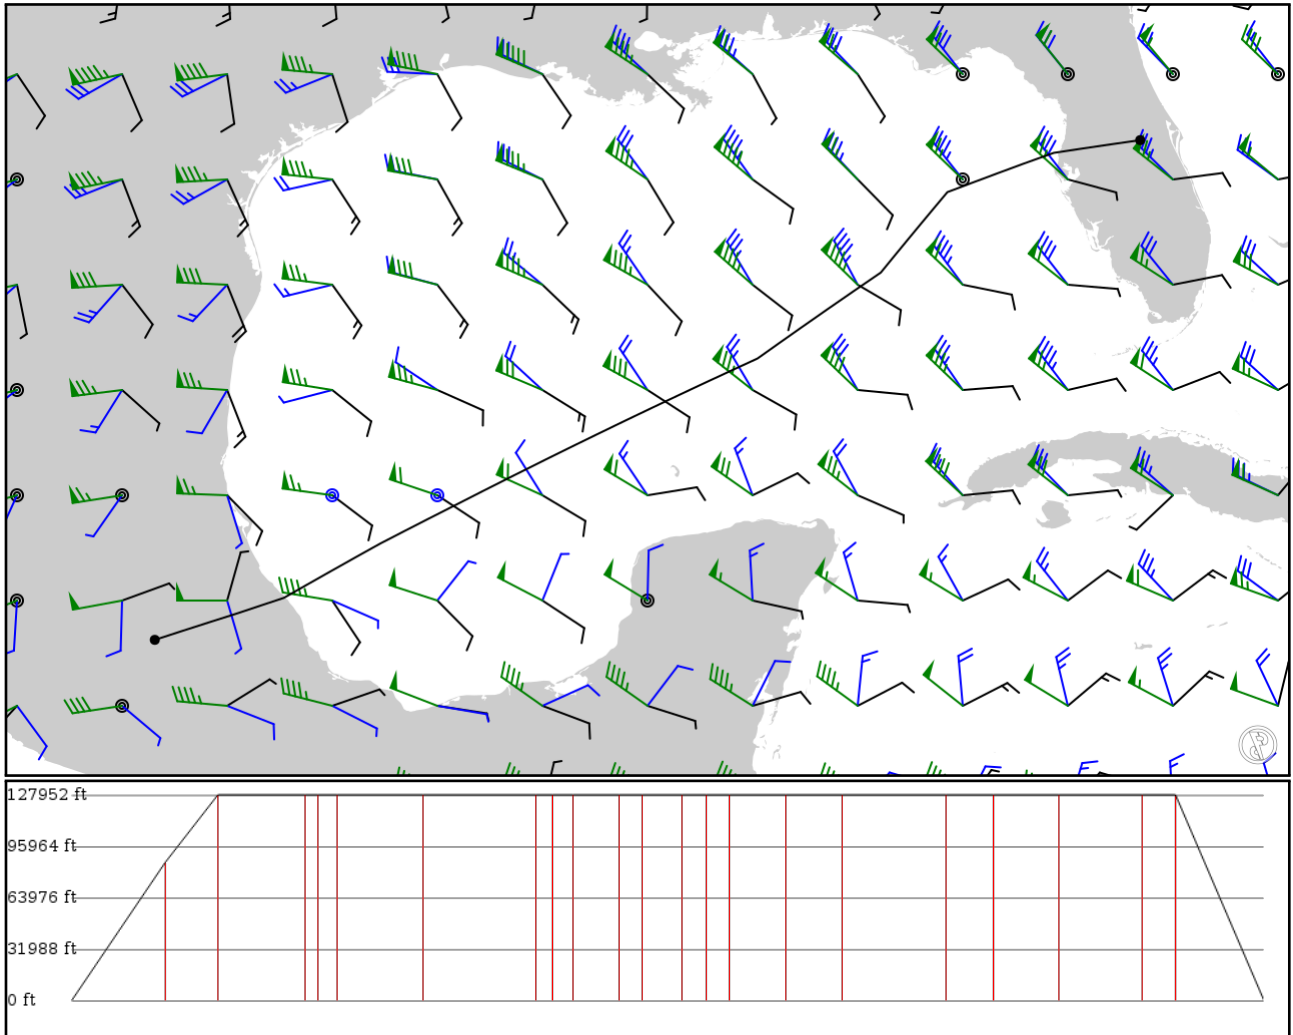

Notes

Basic altitude profile:

- Ascent Rate: 2200ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 39000ft
- Cruise Speed: 453kts
- Descent Rate: 5000ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
MMMX	-	19.43630	0 ft	-	Benito Juarez Intl
APT	-	-99.07210	0 m		
REXES	-	19.91920	26,200 ft	90	-
FIX	-	-97.56530	7,986 m		
NAU	V14	20.19170	39,000 ft	49	NAUTLA VOR-DME
DME	AWY-LO	-96.74550	11,887 m		
URLIX	UM580	20.90720	39,000 ft	83	-
FIX	AWY-HI	-95.47890	11,887 m		
NUBEL	UM580	21.01780	39,000 ft	12	-
FIX	AWY-HI	-95.28030	11,887 m		
TADET	UM580	21.17330	39,000 ft	18	-
FIX	AWY-HI	-95.00000	11,887 m		
COFRE	UM580	21.82560	39,000 ft	81	-
FIX	AWY-HI	-93.72440	11,887 m		
XUBNO	M580	22.67940	39,000 ft	107	-
FIX	AWY-LO	-92.02890	11,887 m		
AXOVI	UM580	22.80280	39,000 ft	15	-
FIX	AWY-HI	-91.77860	11,887 m		
OTOGU	UM580	22.95580	39,000 ft	19	-
FIX	AWY-HI	-91.46750	11,887 m		
AGPOD	UM580	23.30030	39,000 ft	44	-
FIX	AWY-HI	-90.75860	11,887 m		
MAPUM	UM580	23.46140	39,000 ft	20	-
FIX	AWY-HI	-90.42360	11,887 m		
TABSA	UM580	23.75690	39,000 ft	38	-
FIX	AWY-HI	-89.80280	11,887 m		
SUVUM	UM580	23.93610	39,000 ft	23	-
FIX	AWY-HI	-89.42280	11,887 m		
OTIPO	UM580	24.10000	39,000 ft	21	-
FIX	AWY-HI	-89.07250	11,887 m		
IRDOV	UM580	24.50000	39,000 ft	53	-
FIX	AWY-HI	-88.20580	11,887 m		
CCUDA	M580	25.05190	39,000 ft	53	-
FIX	AWY-HI	-87.42430	11,887 m		
MINOW	M580	26.04650	39,000 ft	98	-
FIX	AWY-HI	-85.98300	11,887 m		
SNOMN	M215	26.65180	39,000 ft	45	-
FIX	AWY-HI	-85.48580	11,887 m		
CIGAR	M215	27.49350	39,000 ft	62	-
FIX	AWY-HI	-84.78320	11,887 m		
KHOST	M215	28.00070	39,000 ft	78	-
FIX	AWY-HI	-83.42330	11,887 m		
DARBS	-	28.20000	39,000 ft	31	-
FIX	-	-82.86590	11,887 m		
KMCO	-	28.42920	0 ft	83	Orlando Intl
APT	-	-81.30680	0 m		

MMM

Region: MEXICO
Timezone: AMERICA/MEXICO_CITY
Runways: 2

Elevation: 7,315 ft / 2,230 m
Location: 19.436300 -99.072100
Magnetic Var: 3.894 E

METAR

UNKNOWN

TAF

TAF MMM 050504Z 0506/0606 34005KT P6SM SCT100 TX30/0521Z TN16/0512Z BECMG 0513/0514 6SM HZ 06005KT FM051800 3400

Frequencies

REC - 127.65 MHz - D-ATIS	CLD - 122.10 MHz - CLEARANCE DELIVERY
GND - 121.85 MHz - MEXICO GROUND	GND - 121.00 MHz - MEXICO GROUND
GND - 122.80 MHz - MEXICO GROUND	TWR - 118.55 MHz - MEXICO TOWER
TWR - 118.70 MHz - MEXICO TOWER	TWR - 118.15 MHz - MEXICO TOWER
APP - 119.75 MHz - MEXICO APPROACH	APP - 121.20 MHz - MEXICO APPROACH
DEP - 129.10 MHz - MEXICO DEPARTURE	DEP - 120.50 MHz - MEXICO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05R	148 ft	13,427 ft	59.24	ASPHALT	1,841 ft	325 ft
	45 m	4,093 m	55.35		561 m	99 m
23L	148 ft	13,427 ft	239.25	ASPHALT	289 ft	0 ft
	45 m	4,093 m	235.36		88 m	0 m
05L	148 ft	12,912 ft	59.25	ASPHALT	1,568 ft	0 ft
	45 m	3,936 m	55.36		478 m	0 m
23R	148 ft	12,912 ft	239.26	ASPHALT	1,670 ft	177 ft
	45 m	3,936 m	235.37		509 m	54 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05R	DME	IMWX	109.10 MHz	18 nm	-	-	7,316 ft
				33 km	-		7,316 m
23L	DME	IMEX	109.70 MHz	18 nm	-	-	7,316 ft
				33 km	-		7,316 m
05R	LOC-ILS	IMWX	109.10 MHz	18 nm	59.25	-	7,315 ft
				33 km	55.36		7,315 m
23L	LOC-ILS	IMEX	109.70 MHz	18 nm	239.25	-	7,315 ft
				33 km	235.36		7,315 m
05R	GS	IMWX	109.10 MHz	10 nm	59.25	3.00	7,315 ft
				19 km	55.36		7,315 m
23L	GS	IMEX	109.70 MHz	10 nm	239.25	3.00	7,315 ft
				19 km	235.36		7,315 m

KMCO

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 96 ft / 29 m
Location: 28.429200 -81.306800
Magnetic Var: 7.001 W

METAR

KMCO 050753Z 00000KT 10SM FEW030 23/22 A2993 RMK A02 SLP135 T02330217

TAF

TAF KMCO 050537Z 0506/0612 VRB04KT P6SM FEW030 FM051500 10006KT P6SM SCT040 FM052000 10011KT P6SM VCSH SCT050 SCT

Frequencies

REC - 120.52 MHz - D-ATIS
CLD - 134.70 MHz - CLEARANCE DELIVERY
GND - 126.40 MHz - ORLANDO GROUND
TWR - 124.30 MHz - ORLANDO TOWER
APP - 119.40 MHz - ORLANDO APPROACH
APP - 124.80 MHz - ORLANDO APPROACH
APP - 123.85 MHz - ORLANDO APPROACH
DEP - 119.40 MHz - ORLANDO DEPARTURE
DEP - 124.80 MHz - ORLANDO DEPARTURE

REC - 121.25 MHz - D-ATIS
COM - 122.95 MHz - UNICOM
GND - 121.80 MHz - ORLANDO GROUND
TWR - 118.45 MHz - ORLANDO TOWER
APP - 120.15 MHz - ORLANDO APPROACH
APP - 135.30 MHz - ORLANDO APPROACH
APP - 134.05 MHz - ORLANDO APPROACH
DEP - 120.15 MHz - ORLANDO DEPARTURE
DEP - 135.30 MHz - ORLANDO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17R	151 ft	10,036 ft	179.47	CONCRETE	0 ft	404 ft
	46 m	3,059 m	186.47		0 m	123 m
35L	151 ft	10,036 ft	359.47	CONCRETE	0 ft	400 ft
	46 m	3,059 m	6.47		0 m	122 m
17L	151 ft	9,028 ft	179.48	CONCRETE	0 ft	400 ft
	46 m	2,752 m	186.48		0 m	122 m
35R	151 ft	9,028 ft	359.48	CONCRETE	0 ft	404 ft
	46 m	2,752 m	6.48		0 m	123 m
18L	200 ft	12,049 ft	179.46	CONCRETE	0 ft	400 ft
	61 m	3,673 m	186.46		0 m	122 m
36R	200 ft	12,049 ft	359.46	CONCRETE	0 ft	407 ft
	61 m	3,673 m	6.46		0 m	124 m
18R	200 ft	12,049 ft	179.45	ASPHALT	0 ft	909 ft
	61 m	3,673 m	186.46		0 m	277 m
36L	200 ft	12,049 ft	359.45	ASPHALT	0 ft	702 ft
	61 m	3,673 m	6.46		0 m	214 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	IARK	110.95 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
17R	DME	IDIZ	111.75 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
18R	DME	ITFE	111.90 MHz	18 nm	-	-	86 ft
				33 km	-		86 m
35L	DME	IDDO	110.50 MHz	18 nm	-	-	100 ft
				33 km	-		100 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
35R	DME	ICER	111.15 MHz	18 nm	-	-	90 ft
				33 km	-		90 m
36R	DME	IOJP	110.70 MHz	18 nm	-	-	91 ft
				33 km	-		91 m
17L	LOC-ILS	IARK	110.95 MHz	18 nm	179.46	-	96 ft
				33 km	186.46		96 m
17R	LOC-ILS	IDIZ	111.75 MHz	18 nm	179.51	-	96 ft
				33 km	186.51		96 m
18R	LOC-ILS	ITFE	111.90 MHz	18 nm	179.50	-	96 ft
				33 km	186.50		96 m
35L	LOC-ILS	IDDO	110.50 MHz	18 nm	359.51	-	96 ft
				33 km	6.51		96 m
35R	LOC-ILS	ICER	111.15 MHz	18 nm	359.46	-	96 ft
				33 km	6.46		96 m
36R	LOC-ILS	IOJP	110.70 MHz	18 nm	359.50	-	96 ft
				33 km	6.50		96 m
17L	GS	IARK	110.95 MHz	10 nm	179.46	3.00	96 ft
				19 km	186.46		96 m
17R	GS	IDIZ	111.75 MHz	10 nm	179.51	3.00	96 ft
				19 km	186.51		96 m
18R	GS	ITFE	111.90 MHz	10 nm	179.50	3.00	96 ft
				19 km	186.50		96 m
35L	GS	IDDO	110.50 MHz	10 nm	359.51	3.00	96 ft
				19 km	6.51		96 m
35R	GS	ICER	111.15 MHz	10 nm	359.46	3.00	96 ft
				19 km	6.46		96 m
36R	GS	IOJP	110.70 MHz	10 nm	359.50	3.00	96 ft
				19 km	6.50		96 m