

KDAB

Daytona Beach Intl


KFLL

Fort Lauderdale-Hollywood Intl

2024/05/24 1040Z

KDAB SMERE KFLL

192.83 nm / 357.13 km

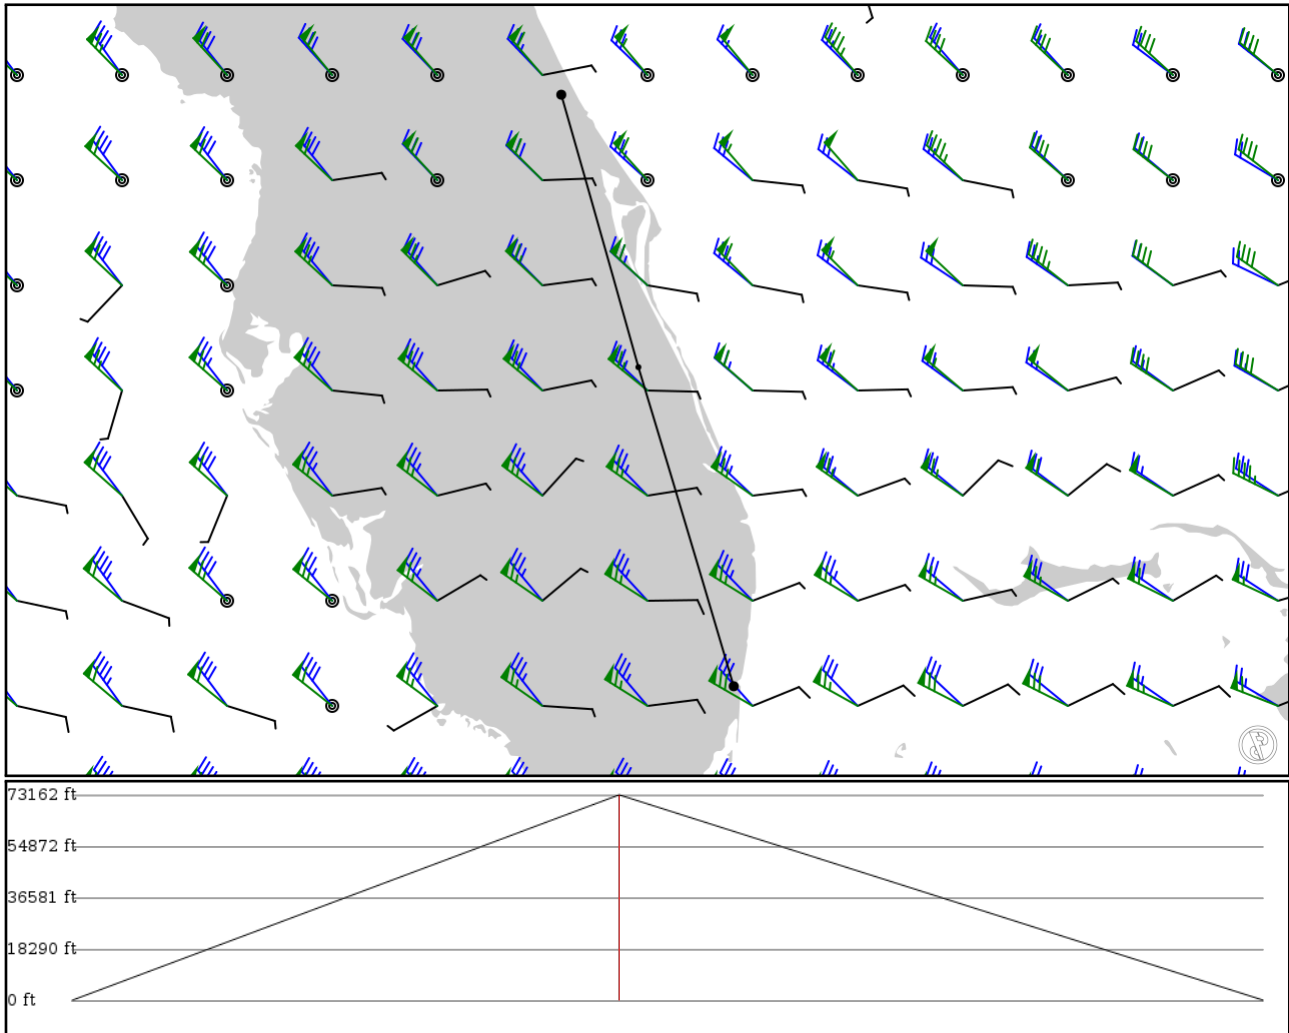

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KDAB	-	29.17990	0 ft	-		Daytona Beach Intl
APT	-	-81.05600	0 m			
SMERE	-	27.74820	22,300 ft	88	-	
FIX	-	-80.65060	6,797 m			
KFLL	-	26.07130	0 ft	104		Fort Lauderdale-Hollywood Intl
APT	-	-80.14950	0 m			

KDAB

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 34 ft / 10 m
Location: 29.179900 -81.056000
Magnetic Var: 7.240 W

METAR

KDAB 240953Z 20003KT 10SM FEW060 FEW150 20/19 A2996 RMK A02 SLP145 T02000194

TAF

TAF KDAB 240520Z 2406/2506 VRB02KT P6SM FEW070 SCT250 FM241600 10010KT P6SM SCT060 SCT250 FM250000 VRB03KT P6SM F

Frequencies

COM - 122.95 MHz - DAYTONA UNICOM
TWR - 120.70 MHz - DAYTONA TOWER
DEP - 123.90 MHz - DAYTONA DEPARTURE

GND - 121.90 MHz - DAYTONA GROUND
APP - 125.80 MHz - DAYTONA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	151 ft	10,511 ft	65.11	ASPHALT	709 ft	381 ft
	46 m	3,204 m	72.35		216 m	116 m
25R	151 ft	10,511 ft	245.12	ASPHALT	0 ft	200 ft
	46 m	3,204 m	252.36		0 m	61 m
16	151 ft	6,006 ft	157.27	ASPHALT	0 ft	207 ft
	46 m	1,831 m	164.51		0 m	63 m
34	151 ft	6,006 ft	337.27	ASPHALT	0 ft	203 ft
	46 m	1,831 m	344.51		0 m	62 m
07R	98 ft	3,199 ft	65.04	ASPHALT	0 ft	0 ft
	30 m	975 m	72.28		0 m	0 m
25L	98 ft	3,199 ft	245.04	ASPHALT	0 ft	0 ft
	30 m	975 m	252.28		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	DME	IDBF	109.70 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
07L	LOC-ILS	IDAB	109.70 MHz	18 nm	65.12	-	27 ft
				33 km	72.36		27 m
25R	LOC-ILS	IDBF	109.70 MHz	18 nm	245.11	-	34 ft
				33 km	252.35		34 m
07L	GS	IDAB	109.70 MHz	10 nm	65.22	3.00	26 ft
				19 km	72.46		26 m
25R	GS	IDBF	109.70 MHz	10 nm	245.22	3.00	34 ft
				19 km	252.46		34 m

KFLL

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 2

Elevation: 65 ft / 20 m
Location: 26.071300 -80.149500
Magnetic Var: 7.394 W

METAR

KFLL 240953Z 00000KT 10SM FEW030 26/21 A2994 RMK AO2 SLP137 T02610211 \$

TAF

TAF AMD KFLL 240833Z 2409/2512 VRB04KT P6SM FEW040 FM241400 10011KT P6SM FEW030 SCT050 FM250100 12006KT P6SM SCT0

Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m