

SPQT

Francisco Secada Vignetta Int'l


SPJC

Jorge Chavez Intl

2024/05/08 1136Z

SPQT RONSO **UT311** TOKAN **UL305** AMVEX SPJC

554.43 nm / 1026.80 km

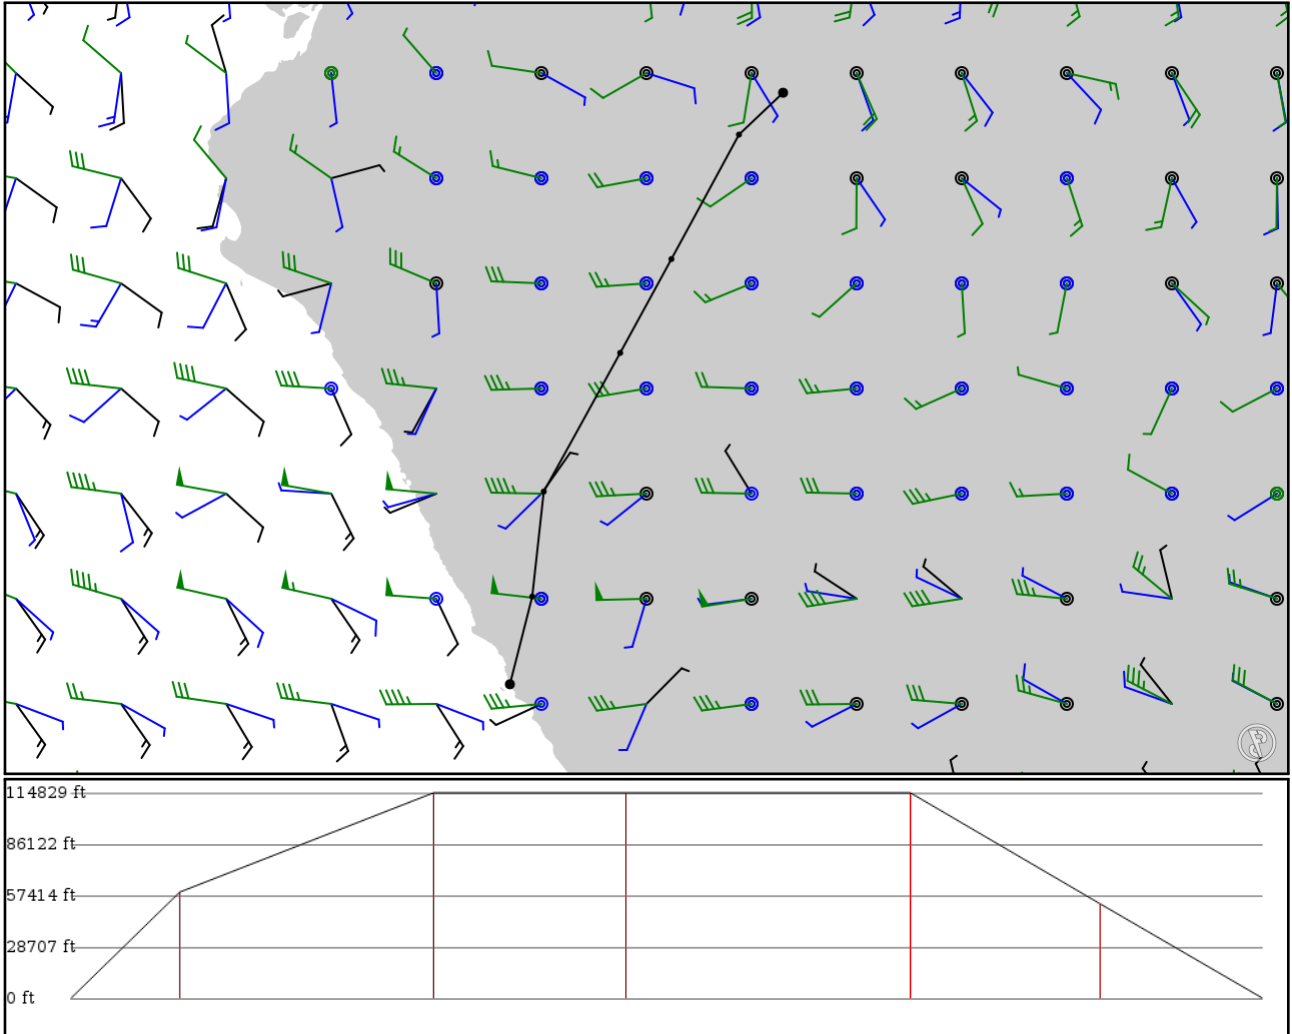

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
SPQT APT	- -	-3.78474 -73.30880	0 ft 0 m	-	Francisco Secada Vignetta Int'l
RONSO FIX	- -	-4.36778 -73.92330	18,100 ft 5,517 m	50 -	-
DANTU FIX	UT311 AWY-HI	-6.10114 -74.86450	35,000 ft 10,668 m	118 -	-
LODIN FIX	UT311 AWY-HI	-7.40722 -75.57820	35,000 ft 10,668 m	89 -	-
TOKAN FIX	UT311 AWY-HI	-9.33819 -76.64260	35,000 ft 10,668 m	132 -	-
AMVEX FIX	UL305 AWY-HI	-10.80060 -76.80330	16,100 ft 4,907 m	88 -	-
SPJC APT	- -	-12.02190 -77.11430	0 ft 0 m	75	Jorge Chavez Intl

SPQT

Region: PERU
Timezone: AMERICA/LIMA
Runways: 1

Elevation: 306 ft / 93 m
Location: -3.784740 -73.308800
Magnetic Var: 7.630 W

METAR

SPQT 081100Z 27004KT 230V300 9999 OVC003 25/24 Q1009 NOSIG RMK PP000

TAF

TAF SPQT 080500Z 0806/0906 VRB02KT CAVOK TX34/0820Z TN24/0811Z TEMPO 0808/0812 1000 BR BKN002 BECMG 0813/0815 BKN

Frequencies

TWR - 118.50 MHz - IQUITOS TWR

APP - 124.10 MHz - IQUITOS APP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	8,210 ft	56.52	CONCRETE	0 ft	46 ft
	45 m	2,502 m	64.15		0 m	14 m
24	148 ft	8,210 ft	236.52	CONCRETE	0 ft	56 ft
	45 m	2,502 m	244.15		0 m	17 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	ISEC	109.70 MHz	18 nm	-	-	306 ft
				33 km	-		306 m
06	LOC-ILS	ISEC	109.70 MHz	18 nm	56.52	-	306 ft
				33 km	64.15		306 m
06	GS	ISEC	109.70 MHz	10 nm	57.05	3.00	306 ft
				19 km	64.68		306 m

SPJC

Region: PERU
Timezone: AMERICA/LIMA
Runways: 1

Elevation: 113 ft / 34 m
Location: -12.021900 -77.114300
Magnetic Var: 2.902 W

METAR

SPJC 081100Z 20004KT 7000 OVC008 18/16 Q1011 NOSIG RMK PP000

TAF

TAF AMD SPJC 081000Z 0810/0906 20005KT 7000 OVC007 TX21/0819Z TN17/0811Z TEMPO 0811/0813 4500 BR OVC004 FM081500

Frequencies

REC - 127.90 MHz - ATIS
TWR - 118.10 MHz - LIMA TOWER
COM - 122.80 MHz - UNICOM
GND - 121.90 MHz - JORGE CHAVEZ GROUND
APP - 119.70 MHz - LIMA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15	148 ft	11,520 ft	154.25	ASPHALT	0 ft	249 ft
	45 m	3,511 m	157.16		0 m	76 m
33	148 ft	11,520 ft	334.25	ASPHALT	1,968 ft	213 ft
	45 m	3,511 m	337.15		600 m	65 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	DME	JCH	109.70 MHz	18 nm	-	-	113 ft
				33 km	-		113 m
15	LOC-ILS	JCH	109.70 MHz	18 nm	154.25	-	183 ft
				33 km	157.16		183 m
15	GS	JCH	109.70 MHz	10 nm	154.51	2.70	118 ft
				19 km	157.41		118 m