

# LSGG

Geneva


# LIRF

Roma Fiumicino Leonardo Da Vinci

2024/05/02 1927Z

LSGG TOP A1 ELB LIRF

378.73 nm / 701.40 km

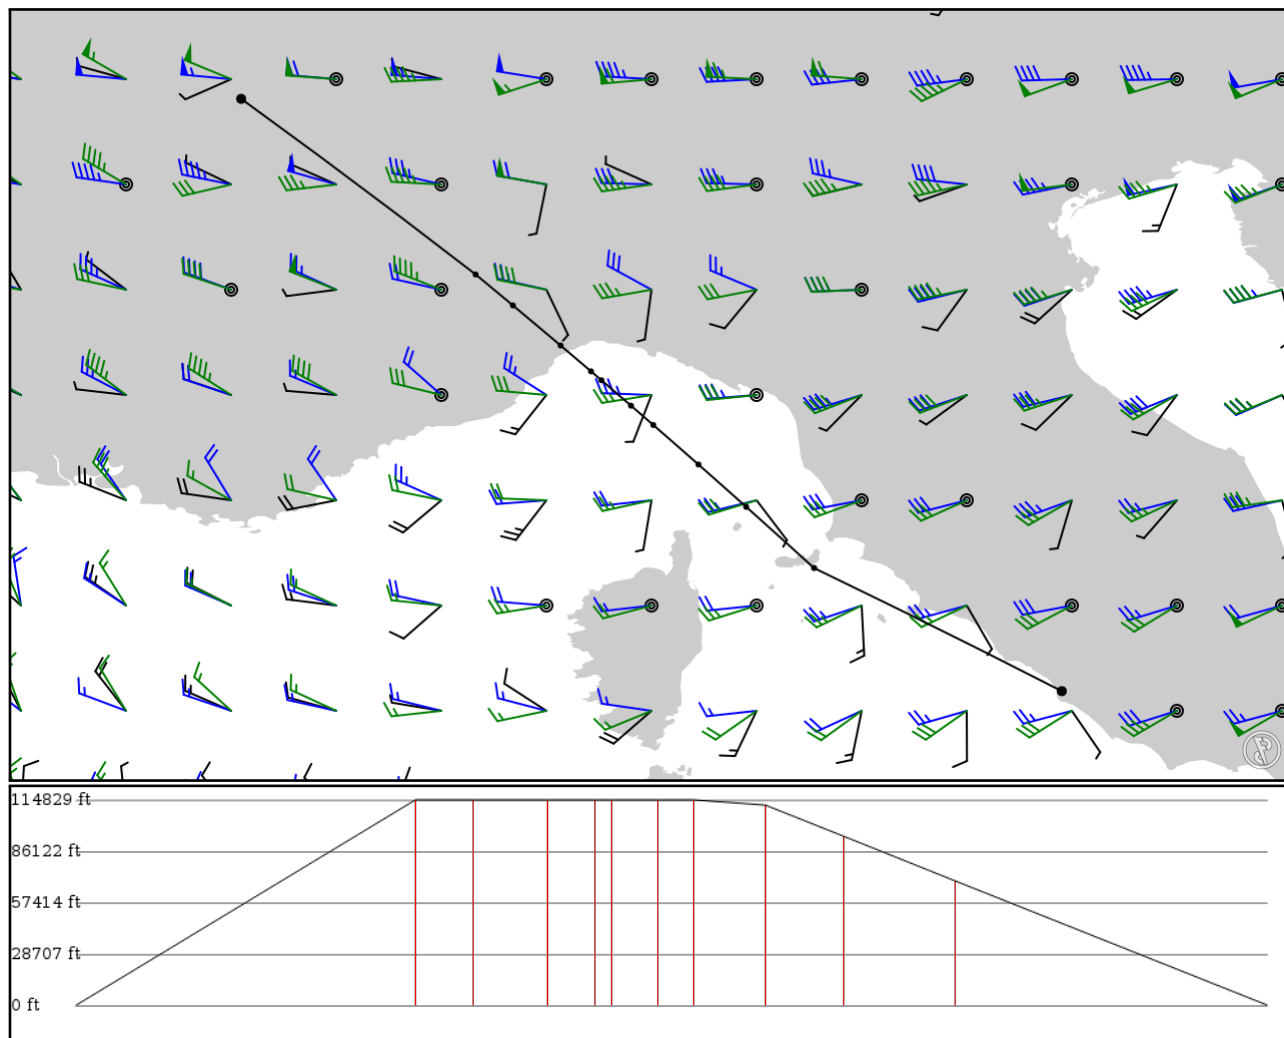

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LSGG	-	46.23775	0 ft	-	Geneva
APT	-	6.10617	0 m		
TOP	-	44.92525	35,000 ft	107	TORINO VOR-DME
VOR	-	7.86166	10,668 m		
NEDED	A1	44.69389	35,000 ft	18	-
FIX	AWY-LO	8.14056	10,668 m		
LAGEN	A1	44.39417	35,000 ft	23	-
FIX	AWY-LO	8.49806	10,668 m		
ANAKI	A1	44.20111	35,000 ft	15	-
FIX	AWY-LO	8.72556	10,668 m		
IXITO	A1	44.13472	35,000 ft	5	-
FIX	AWY-LO	8.80361	10,668 m		
UNITA	A1	43.94444	35,000 ft	14	-
FIX	AWY-LO	9.02500	10,668 m		
KAFEE	A1	43.80000	35,000 ft	11	-
FIX	AWY-LO	9.19194	10,668 m		
KONER	A1	43.50472	34,100 ft	23	-
FIX	AWY-LO	9.53000	10,394 m		
MAURO	A1	43.18806	28,800 ft	24	-
FIX	AWY-LO	9.88750	8,778 m		
ELB	A1	42.73069	21,200 ft	35	ELBA VORTAC
VOR	AWY-LO	10.39572	6,462 m		
LIRF	-	41.81081	0 ft	99	Roma Fiumicino Leonardo Da Vinci
APT	-	12.25090	0 m		

## LSGG

Region: SWITZERLAND  
Timezone: EUROPE/ZURICH  
Runways: 1

Elevation: 1,411 ft / 430 m  
Location: 46.238100 6.109010  
Magnetic Var: 2.508 E

## METAR

LSGG 021920Z AUTO 20010KT 9999 -RA BKN034 09/07 Q1011 NOSIG

## TAF

TAF TAF LSGG 021725Z 0218/0324 22007KT 9999 BKN040 TX16/0314Z TN08/0306Z

## Frequencies

REC - 124.75 MHz - ATIS	REC - 135.57 MHz - ATIS
GND - 121.75 MHz - GENEVA APRON	GND - 121.85 MHz - GENEVA APRON
GND - 121.67 MHz - GENEVA GROUND	GND - 119.70 MHz - GENEVA GROUND
TWR - 118.70 MHz - GENEVA TOWER	TWR - 119.90 MHz - GENEVA TOWER
DEP - 131.32 MHz - GENEVA DEPARTURE	DEP - 119.52 MHz - GENEVA DEPARTURE
APP - 136.45 MHz - GENEVA TRANSIT	APP - 136.25 MHz - GENEVA ARRIVAL
APP - 130.55 MHz - GENEVA APPROACH	APP - 120.30 MHz - GENEVA FINAL

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	164 ft	12,806 ft	45.42	CONCRETE	1,076 ft	0 ft
	50 m	3,903 m	42.91		328 m	0 m
22	164 ft	12,806 ft	225.45	CONCRETE	0 ft	0 ft
	50 m	3,903 m	222.94		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	LOC-ILS	INE	110.90 MHz	18 nm	45.44	-	1,411 ft
				33 km	42.93		1,411 m
22	LOC-ILS	ISW	109.90 MHz	18 nm	225.44	-	1,411 ft
				33 km	222.93		1,411 m
04	GS	INE	110.90 MHz	10 nm	45.44	3.00	1,411 ft
				19 km	42.93		1,411 m
22	GS	ISW	109.90 MHz	10 nm	225.44	3.00	1,411 ft
				19 km	222.93		1,411 m

## LIRF

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 3

Elevation: 13 ft / 4 m  
Location: 41.810800 12.250900  
Magnetic Var: 3.663 E

## METAR

LIRF 021850Z AUTO 25011KT 9999 FEW033/// 15/09 Q1012

## TAF

TAF LIRF 021700Z 0218/0324 24015G25KT 9999 SCT025 TEMPO 0218/0220 4000 TSRA TEMPO 0220/0308 SHRA BECMG 0223/0301 2

## Frequencies

REC - 120.17 MHz - ATIS ARRIVAL  
REC - 121.85 MHz - ATIS DEPARTURE  
GND - 121.72 MHz - FIUME APRON  
GND - 121.90 MHz - FIUME GROUND  
TWR - 127.62 MHz - FIUME TOWER  
TWR - 118.70 MHz - FIUME TOWER  
DEP - 131.10 MHz - ROMA DEPARTURE  
APP - 125.50 MHz - ROMA ARRIVAL  
APP - 131.25 MHz - ROMA DIRECT

REC - 126.12 MHz - ATIS ARRIVAL  
CLD - 121.80 MHz - CLEARANCE DELIVERY  
GND - 121.67 MHz - FIUME GROUND  
GND - 122.12 MHz - FIUME GROUND  
TWR - 123.72 MHz - FIUME TOWER  
DEP - 130.90 MHz - ROMA DEPARTURE  
APP - 127.95 MHz - ROMA ARRIVAL  
APP - 119.20 MHz - ROMA DIRECT

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	148 ft	10,859 ft	69.68	ASPHALT	1,348 ft	0 ft
	45 m	3,310 m	66.02		411 m	0 m
25	148 ft	10,859 ft	249.71	ASPHALT	0 ft	0 ft
	45 m	3,310 m	246.04		0 m	0 m
16R	197 ft	12,814 ft	162.66	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.00		0 m	0 m
34L	197 ft	12,814 ft	342.67	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.01		0 m	0 m
16L	197 ft	12,814 ft	162.68	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.02		0 m	0 m
34R	197 ft	12,814 ft	342.69	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.03		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	FEE	110.15 MHz	25 nm	-	-	25 ft
				46 km	-		25 m
34L	DME	ISW	108.90 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
34R	DME	FSS	111.55 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
16L	LOC-ILS	IFLL	108.10 MHz	18 nm	162.69	-	13 ft
				33 km	159.03		13 m
16R	LOC-ILS	IFRR	109.75 MHz	18 nm	162.67	-	13 ft
				33 km	159.01		13 m
25	LOC-ILS	FEE	110.15 MHz	18 nm	249.69	-	13 ft
				33 km	246.03		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34L	LOC-ILS	IFSW	108.90 MHz	18 nm	342.67	-	13 ft
				33 km	339.01		13 m
34R	LOC-ILS	FSS	111.55 MHz	18 nm	342.69	-	13 ft
				33 km	339.03		13 m
16L	GS	IFLL	108.10 MHz	10 nm	162.69	3.00	13 ft
				19 km	159.03		13 m
16R	GS	IFRR	109.75 MHz	10 nm	162.67	3.00	13 ft
				19 km	159.01		13 m
25	GS	FEE	110.15 MHz	10 nm	249.69	3.00	13 ft
				19 km	246.03		13 m
34L	GS	IFSW	108.90 MHz	10 nm	342.67	3.00	13 ft
				19 km	339.01		13 m
34R	GS	FSS	111.55 MHz	10 nm	342.69	3.00	13 ft
				19 km	339.03		13 m