

PAED

Elmendorf AFB


PHNL

Daniel K. Inouye International Airport

2024/06/06 0253Z

PAED TED **J125** ODK 5700N15300W 5600N15300W 5400N15400W 5200N15500W 5000N15500W 4900N15500W
4700N15600W 4500N15600W 4400N15600W 4200N15600W 4000N15600W 3800N15600W 3700N15600W 3500N15600W
3300N15600W 3100N15600W 3000N15600W 2800N15600W 2600N15600W ZOULU **A331** ZIGIE **V7** ATINE PHNL

2465.86 nm / 4566.77 km

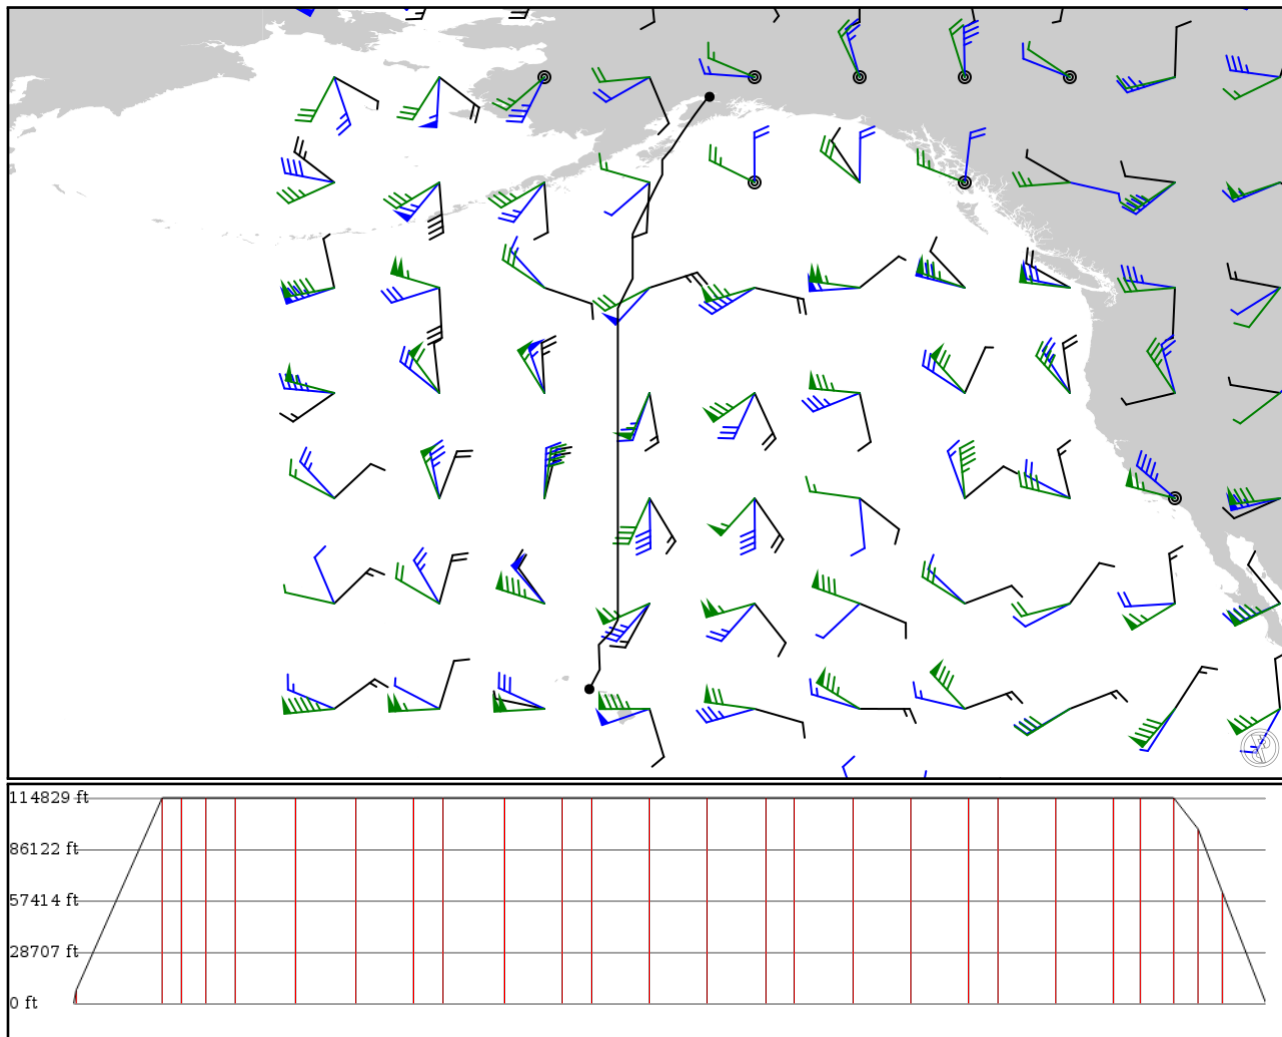

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes

- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PAED	-	61.25100	0 ft	-	Elmendorf AFB
APT	-	-149.80500	0 m		
TED	-	61.16790	2,300 ft	6	ANCHORAGE
VOR	-	-149.96000	701 m		
KODNE	J125	58.40470	35,000 ft	176	-
FIX	AWY-HI	-151.93500	10,668 m		
ODK	J125	57.77500	35,000 ft	39	KODIAK
VOR	AWY-HI	-152.34000	10,668 m		
5700N15300W	-	57.00000	35,000 ft	51	-
LATLON	-	-153.00000	10,668 m		
5600N15300W	-	56.00000	35,000 ft	60	-
LATLON	-	-153.00000	10,668 m		
5400N15400W	-	54.00000	35,000 ft	124	-
LATLON	-	-154.00000	10,668 m		
5200N15500W	-	52.00000	35,000 ft	125	-
LATLON	-	-155.00000	10,668 m		
5000N15500W	-	50.00000	35,000 ft	120	-
LATLON	-	-155.00000	10,668 m		
4900N15500W	-	49.00000	35,000 ft	60	-
LATLON	-	-155.00000	10,668 m		
4700N15600W	-	47.00000	35,000 ft	126	-
LATLON	-	-156.00000	10,668 m		
4500N15600W	-	45.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
4400N15600W	-	44.00000	35,000 ft	60	-
LATLON	-	-156.00000	10,668 m		
4200N15600W	-	42.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
4000N15600W	-	40.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
3800N15600W	-	38.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
3700N15600W	-	37.00000	35,000 ft	60	-
LATLON	-	-156.00000	10,668 m		
3500N15600W	-	35.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
3300N15600W	-	33.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
3100N15600W	-	31.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
3000N15600W	-	30.00000	35,000 ft	60	-
LATLON	-	-156.00000	10,668 m		
2800N15600W	-	28.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
2600N15600W	-	26.00000	35,000 ft	120	-
LATLON	-	-156.00000	10,668 m		
ZOULU	-	25.19580	35,000 ft	53	-
FIX	-	-156.42100	10,668 m		
ZIGIE	A331	24.31370	35,000 ft	70	-
FIX	AWY-HI	-157.28500	10,668 m		
BERLE	V7	23.47810	29,700 ft	50	-
FIX	AWY-HI	-157.25600	9,053 m		
ATINE	V7	22.64110	18,900 ft	50	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	-157.22400	5,761 m		
PHNL	-	21.31940	0 ft	88	Daniel K. Inouye International Airport
APT	-	-157.92100	0 m		

PAED

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 2

Elevation: 212 ft / 65 m

Location: 61.251000 -149.805000

Magnetic Var: 14.066 E

METAR

PAED 060155Z 00000KT 10SM -RA FEW005 FEW027 SCT035 OVC060 12/07 A2962

TAF

TAF TAF PAED 052100Z 0521/0703 21009KT 8000 -RA SCT025 OVC040 610406 510604 QNH2952INS BECMG 0601/0602 19006KT 9000

Frequencies

REC - 124.30 MHz - ATIS

GND - 121.80 MHz - ELMENDORF GROUND

APP - 118.60 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

CLD - 128.80 MHz - CLEARANCE DELIVERY

TWR - 127.20 MHz - ELMENDORF TOWER

APP - 134.10 MHz - ANCHORAGE APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	200 ft	10,009 ft	79.99	ASPHALT	0 ft	1,001 ft
	61 m	3,051 m	65.92		0 m	305 m
24	200 ft	10,009 ft	260.04	ASPHALT	0 ft	1,001 ft
	61 m	3,051 m	245.97		0 m	305 m
16	150 ft	8,035 ft	179.97	ASPHALT	0 ft	945 ft
	46 m	2,449 m	165.90		0 m	288 m
34	150 ft	8,035 ft	359.97	ASPHALT	558 ft	154 ft
	46 m	2,449 m	345.90		170 m	47 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	IEDF	110.30 MHz	18 nm	80.01	-	212 ft
				33 km	65.94		212 m
06	GS	IEDF	110.30 MHz	10 nm	80.01	3.00	212 ft
				19 km	65.94		212 m

PHNL

Region: USA (HAWAII)
Timezone: PACIFIC/HONOLULU
Runways: 4

Elevation: 13 ft / 4 m
Location: 21.319400 -157.921000
Magnetic Var: 9.256 E

METAR

PHNL 060153Z 05014G20KT 10SM FEW025 FEW038 29/19 A3002

TAF

TAF PHNL 052338Z 0600/0706 07011G20KT P6SM FEW025 SCT040 FM060600 VRB05KT P6SM FEW020 SCT035 FM062100 19010KT P6S

Frequencies

REC - 127.90 MHz - ATIS	TWR - 118.10 MHz - HONOLULU TOWER
TWR - 123.90 MHz - HONOLULU TOWER	GND - 121.90 MHz - HONOLULU GROUND
CLD - 121.40 MHz - CLEARANCE DELIVERY	APP - 118.30 MHz - HCF APPROACH
DEP - 124.80 MHz - HCF DEPARTURE	DEP - 124.80 MHz - HCF DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	6,961 ft	52.84	ASPHALT	0 ft	0 ft
	46 m	2,122 m	43.58		0 m	0 m
22R	150 ft	6,961 ft	232.85	ASPHALT	0 ft	0 ft
	46 m	2,122 m	223.59		0 m	0 m
04R	150 ft	9,010 ft	52.85	ASPHALT	0 ft	194 ft
	46 m	2,746 m	43.59		0 m	59 m
22L	150 ft	9,010 ft	232.86	ASPHALT	0 ft	197 ft
	46 m	2,746 m	223.60		0 m	60 m
08R	200 ft	11,987 ft	90.01	ASPHALT	0 ft	558 ft
	61 m	3,654 m	80.75		0 m	170 m
26L	200 ft	11,987 ft	270.02	ASPHALT	0 ft	554 ft
	61 m	3,654 m	260.76		0 m	169 m
08L	150 ft	12,297 ft	90.00	ASPHALT	0 ft	469 ft
	46 m	3,748 m	80.74		0 m	143 m
26R	150 ft	12,297 ft	270.01	ASPHALT	0 ft	696 ft
	46 m	3,748 m	260.76		0 m	212 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IIUM	110.50 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
26L	DME	IEPC	109.10 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
26L	LOC-LOC	IEPC	109.10 MHz	18 nm	304.00	-	13 ft
				33 km	294.74		13 m
04R	GS	IIUM	110.50 MHz	10 nm	52.85	3.00	13 ft
				19 km	43.59		13 m
08L	GS	IHNL	111.70 MHz	10 nm	90.01	3.01	13 ft
				19 km	80.75		13 m