


**LFPO**  
Paris Orly

**EGLL**  
London Heathrow

2024/05/03 0228Z

LFPO BIBAX EGLL

197.58 nm / 365.91 km

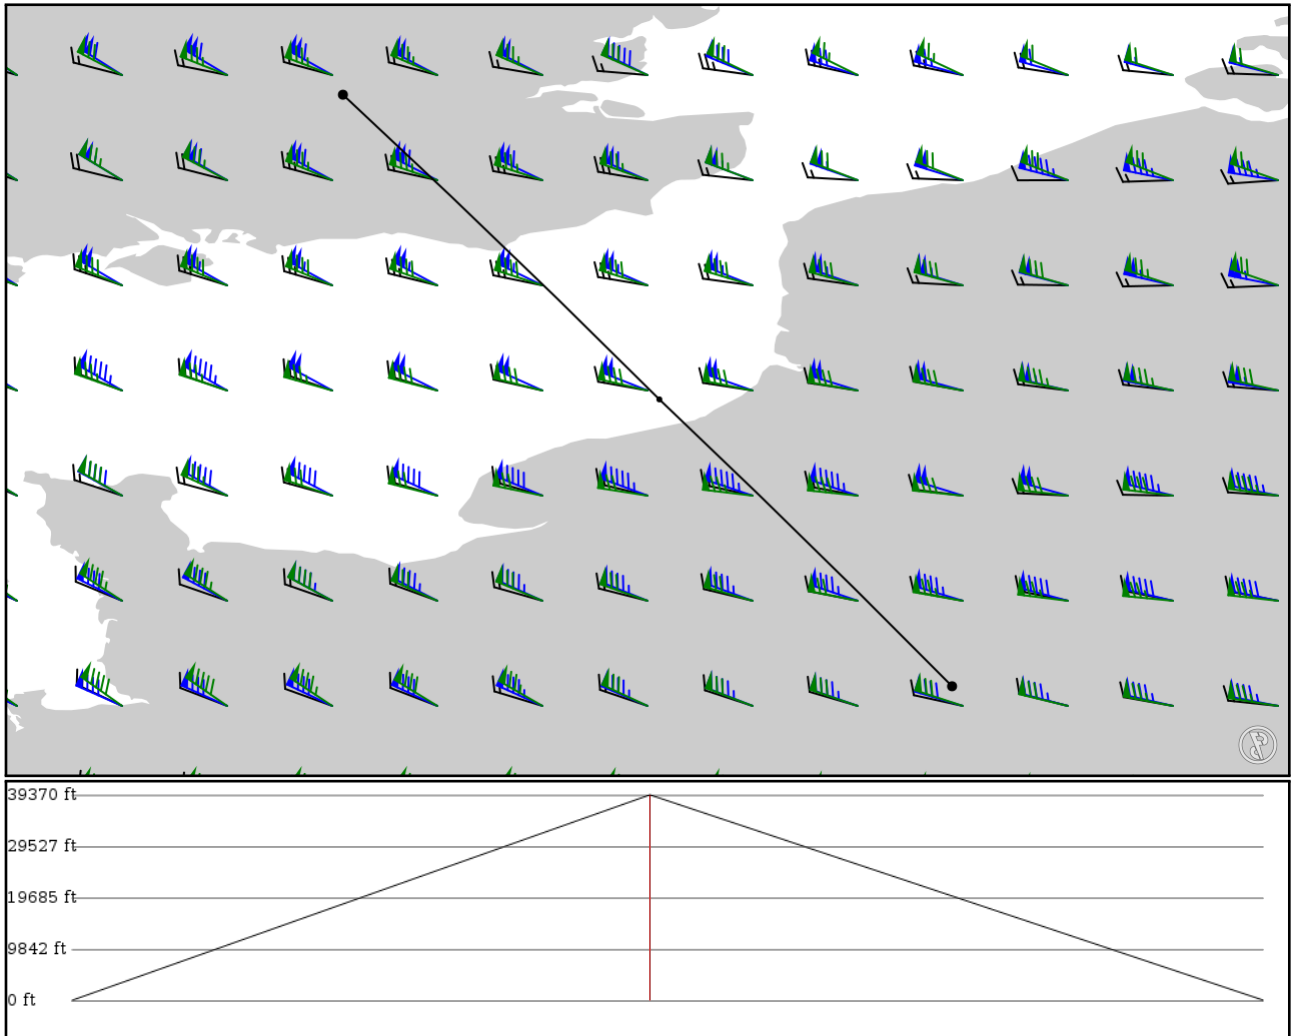

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 12000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFPO	-	48.72630	0 ft	-	Paris Orly
APT	-	2.36698	0 m	-	
BIBAX	-	50.05750	12,000 ft	95	-
FIX	-	1.00806	3,658 m	-	
EGLL	-	51.47120	0 ft	101	London Heathrow
APT	-	-0.46088	0 m	-	

## LFPO

Region: FRANCE  
Timezone: EUROPE/PARIS  
Runways: 3

Elevation: 291 ft / 89 m  
Location: 48.726300 2.366980  
Magnetic Var: 1.447 E

## METAR

LFPO 030200Z AUTO 25006KT CAVOK 10/07 Q1011 NOSIG

## TAF

TAF LFPO 022300Z 0300/0406 24010KT CAVOK PROB30 TEMPO 0304/0307 BKN009 PROB40 TEMPO 0313/0318 -SHRA BKN035TCU PRO

## Frequencies

REC - 126.50 MHz - ORLY ATIS	REC - 131.35 MHz - ORLY ATIS
CLD - 121.05 MHz - PREFLIGHT	GND - 121.70 MHz - ORLY GROUND
GND - 121.82 MHz - ORLY GROUND	TWR - 118.70 MHz - ORLY TOWER
TWR - 120.50 MHz - ORLY TOWER	APP - 118.85 MHz - PARIS APPROACH
APP - 123.87 MHz - PARIS APPROACH	APP - 124.45 MHz - PARIS APPROACH
DEP - 124.35 MHz - PARIS DEPARTURE	DEP - 127.75 MHz - PARIS DEPARTURE
DEP - 128.37 MHz - PARIS DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	148 ft	11,953 ft	61.78	ASPHALT	984 ft	482 ft
	45 m	3,643 m	60.34		300 m	147 m
24	148 ft	11,953 ft	241.82	ASPHALT	0 ft	492 ft
	45 m	3,643 m	240.37		0 m	150 m
07	148 ft	10,868 ft	74.34	CONCRETE	0 ft	0 ft
	45 m	3,313 m	72.89		0 m	0 m
25	148 ft	10,868 ft	254.38	CONCRETE	1,427 ft	0 ft
	45 m	3,313 m	252.93		435 m	0 m
02	197 ft	7,875 ft	18.30	CONCRETE	0 ft	492 ft
	60 m	2,400 m	16.85		0 m	150 m
20	197 ft	7,875 ft	198.31	CONCRETE	0 ft	492 ft
	60 m	2,400 m	196.86		0 m	150 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	ORE	108.50 MHz	18 nm	-	-	291 ft
				33 km	-		291 m
24	DME	OLO	110.90 MHz	18 nm	-	-	291 ft
				33 km	-		291 m
02	LOC-ILS	OLN	110.30 MHz	18 nm	18.31	-	291 ft
				33 km	16.86		291 m
06	LOC-ILS	ORE	108.50 MHz	18 nm	61.80	-	291 ft
				33 km	60.35		291 m
07	LOC-ILS	OLE	108.15 MHz	18 nm	74.36	-	291 ft
				33 km	72.91		291 m
24	LOC-ILS	OLO	110.90 MHz	18 nm	241.80	-	291 ft
				33 km	240.35		291 m
25	LOC-ILS	OLW	111.75 MHz	18 nm	254.36	-	291 ft
				33 km	252.91		291 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	LOC-LOC	OLE	108.15 MHz	18 nm	74.37	-	291 ft
				33 km	72.92		291 m
02	GS	OLN	110.30 MHz	10 nm	18.31	3.00	291 ft
				19 km	16.86		291 m
06	GS	ORE	108.50 MHz	10 nm	61.80	3.00	291 ft
				19 km	60.35		291 m
07	GS	OLE	108.15 MHz	10 nm	74.36	3.00	291 ft
				19 km	72.91		291 m
24	GS	OLO	110.90 MHz	10 nm	241.80	3.00	291 ft
				19 km	240.35		291 m
25	GS	OLW	111.75 MHz	10 nm	254.36	3.00	291 ft
				19 km	252.91		291 m

## EGLL

Region: UNITED KINGDOM  
Timezone: EUROPE/LONDON  
Runways: 2

Elevation: 83 ft / 25 m  
Location: 51.471200 -0.460881  
Magnetic Var: 0.374 E

## METAR

EGLL 030150Z AUTO 26010KT 9999 -RA BKN006 OVC035 10/09 Q1006 TEMPO RA

## TAF

TAF EGLL 022303Z 0300/0406 26010KT 9999 BKN016 TEMPO 0300/0312 6000 RA -RADZ BKN007 PROB30 TEMPO 0300/0311 3000 +S

## Frequencies

REC - 128.07 MHz - HEATHROW INFORMATION	REC - 121.92 MHz - HEATHROW INFORMATION
CLD - 121.97 MHz - HEATHROW DELIVERY	GND - 121.70 MHz - HEATHROW GROUND
GND - 121.85 MHz - HEATHROW GROUND	GND - 121.90 MHz - HEATHROW GROUND
TWR - 118.50 MHz - HEATHROW TOWER	TWR - 118.70 MHz - HEATHROW TOWER
TWR - 124.47 MHz - HEATHROW TOWER	APP - 119.72 MHz - HEATHROW DIRECTOR
APP - 120.40 MHz - HEATHROW DIRECTOR	APP - 134.97 MHz - HEATHROW DIRECTOR
APP - 125.62 MHz - HEATHROW RADAR	APP - 127.52 MHz - HEATHROW RADAR
DEP - 120.52 MHz - HEATHROW DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	164 ft	12,770 ft	89.66	ASPHALT	1,007 ft	0 ft
	50 m	3,892 m	89.29		307 m	0 m
27R	164 ft	12,770 ft	269.70	ASPHALT	0 ft	177 ft
	50 m	3,892 m	269.33		0 m	54 m
09R	164 ft	11,975 ft	89.68	ASPHALT	1,004 ft	0 ft
	50 m	3,650 m	89.31		306 m	0 m
27L	164 ft	11,975 ft	269.72	ASPHALT	0 ft	95 ft
	50 m	3,650 m	269.35		0 m	29 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IAA	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09R	DME	IBB	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27L	DME	ILL	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27R	DME	IRR	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09L	LOC-ILS	IAA	110.30 MHz	18 nm	89.68	-	83 ft
				33 km	89.31		83 m
09R	LOC-ILS	IBB	109.50 MHz	18 nm	89.70	-	83 ft
				33 km	89.33		83 m
27L	LOC-ILS	ILL	109.50 MHz	18 nm	269.70	-	83 ft
				33 km	269.33		83 m
27R	LOC-ILS	IRR	110.30 MHz	18 nm	269.68	-	83 ft
				33 km	269.31		83 m
09L	GS	IAA	110.30 MHz	10 nm	89.68	3.00	83 ft
				19 km	89.31		83 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	GS	IBB	109.50 MHz	10 nm	89.70	3.00	83 ft
				19 km	89.33		83 m
27L	GS	ILL	109.50 MHz	10 nm	269.70	3.00	83 ft
				19 km	269.33		83 m
27R	GS	IRR	110.30 MHz	10 nm	269.68	3.00	83 ft
				19 km	269.31		83 m