


2024/06/04 1415Z

KTMA SSONY KPDK

152.62 nm / 282.65 km

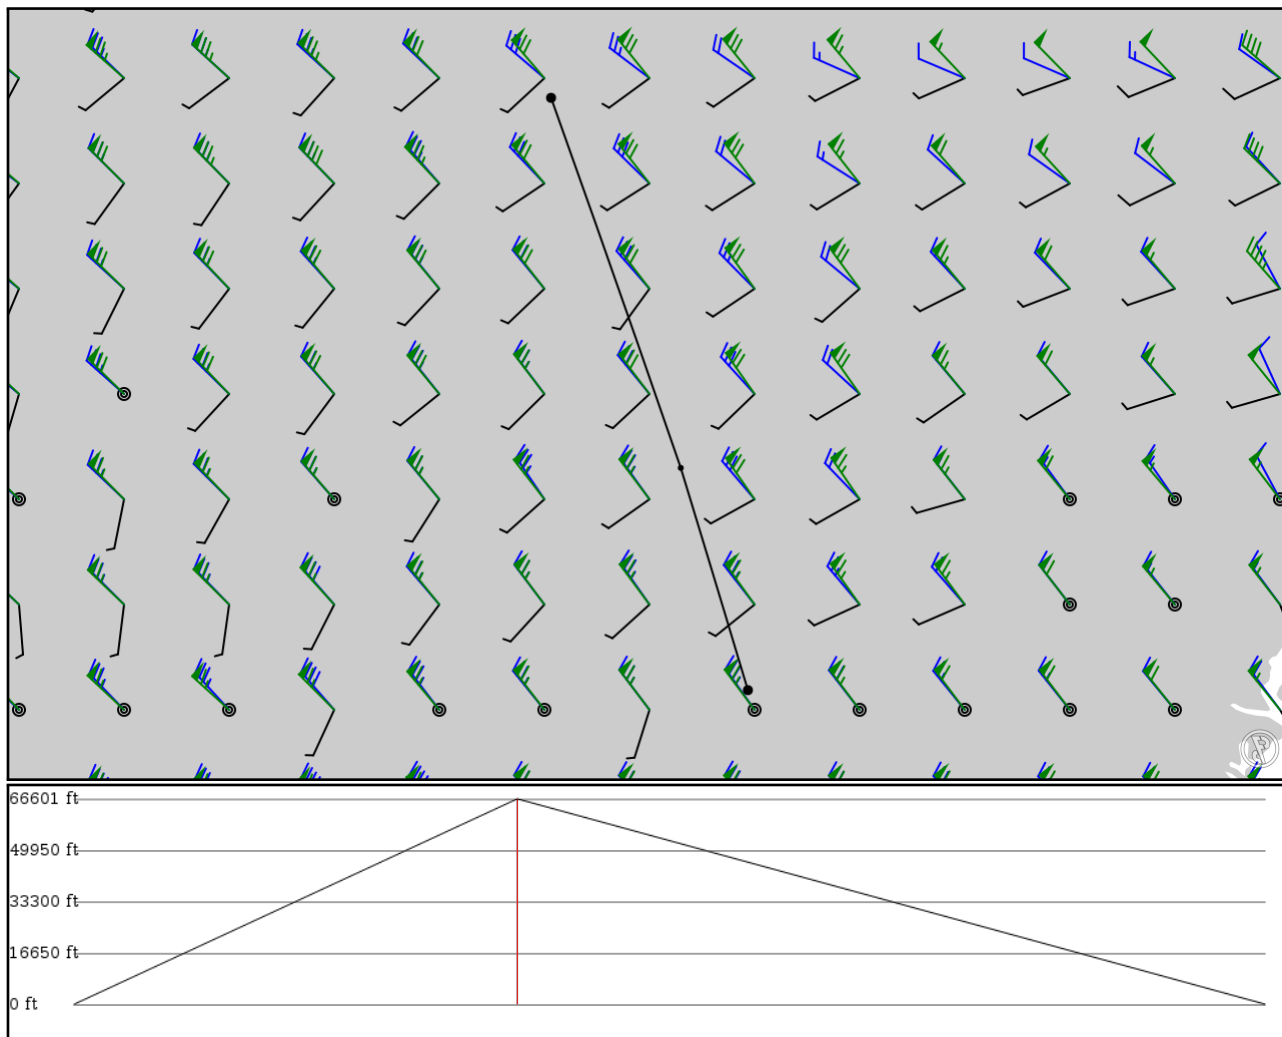

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KTMA	-	31.42920	0 ft	-	HENRY TIFT MYERS
APT	-	-83.48780	0 m		
SSONY	-	32.34720	20,300 ft	56	-
FIX	-	-83.76560	6,187 m		
KPDK	-	33.87590	0 ft	95	Dekalb Peachtree Airport
APT	-	-84.30230	0 m		

KTMA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 355 ft / 108 m
Location: 31.429200 -83.487800
Magnetic Var: 6.001 W

METAR

KTMA 041355Z AUTO 18004KT 10SM CLR 27/22 A2998 RMK A02 T02680222

TAF

UNKNOWN

Frequencies

REC - 118.52 MHz - AWOS 3
APP - 119.52 MHz - VALDOSTA APP/DEP

COM - 122.70 MHz - CTAF/UNICOM
APP - 126.60 MHz - VALDOSTA APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15	100 ft	5,515 ft	149.46	ASPHALT	0 ft	0 ft
	30 m	1,681 m	155.46		0 m	0 m
33	100 ft	5,515 ft	329.46	ASPHALT	0 ft	0 ft
	30 m	1,681 m	335.46		0 m	0 m
10	75 ft	3,798 ft	94.45	ASPHALT	0 ft	0 ft
	23 m	1,158 m	100.45		0 m	0 m
28	75 ft	3,798 ft	274.46	ASPHALT	0 ft	0 ft
	23 m	1,158 m	280.46		0 m	0 m
03	75 ft	3,396 ft	31.05	ASPHALT	0 ft	0 ft
	23 m	1,035 m	37.05		0 m	0 m
21	75 ft	3,396 ft	211.05	ASPHALT	0 ft	0 ft
	23 m	1,035 m	217.05		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
33	DME	ITMA	109.70 MHz	18 nm	-	-	355 ft
				33 km	-		355 m
33	LOC-ILS	ITMA	109.70 MHz	18 nm	329.44	-	355 ft
				33 km	335.44		355 m
33	GS	ITMA	109.70 MHz	10 nm	329.92	3.00	346 ft
				19 km	335.92		346 m

KPDK

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 998 ft / 304 m
Location: 33.875900 -84.302300
Magnetic Var: 5.745 W

METAR

KPDK 041353Z VRB04KT 10SM SCT012 24/21 A2996 RMK A02 SLP131 T02390206

TAF

TAF AMD KPDK 041255Z 0413/0512 00000KT 6SM BR SCT010 SCT040 TEMPO 0413/0415 BKN004 FM041500 20006KT P6SM SCT030 BK

Frequencies

REC - 128.40 MHz - ATIS
CLD - 125.20 MHz - CLEARANCE DELIVERY
TWR - 120.90 MHz - PEACHTREE TOWER
APP - 126.97 MHz - ATLANTA DEPARTURE
COM - 122.95 MHz - UNICOM
GND - 121.60 MHz - PEACHTREE GROUND
APP - 126.97 MHz - ATLANTA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03R	98 ft	6,014 ft	20.42	CONCRETE	30 ft	33 ft
	30 m	1,833 m	26.16		9 m	10 m
21L	98 ft	6,014 ft	200.42	CONCRETE	1,188 ft	0 ft
	30 m	1,833 m	206.17		362 m	0 m
16	151 ft	3,976 ft	157.48	ASPHALT	0 ft	0 ft
	46 m	1,212 m	163.23		0 m	0 m
34	151 ft	3,976 ft	337.49	ASPHALT	0 ft	0 ft
	46 m	1,212 m	343.23		0 m	0 m
03L	151 ft	3,750 ft	20.40	ASPHALT	10 ft	0 ft
	46 m	1,143 m	26.14		3 m	0 m
21R	151 ft	3,750 ft	200.40	ASPHALT	0 ft	43 ft
	46 m	1,143 m	206.15		0 m	13 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
21L	LOC-ILS	IPDK	111.10 MHz	18 nm	200.42	-	998 ft
				33 km	206.17		998 m
21L	GS	IPDK	111.10 MHz	10 nm	200.42	3.00	998 ft
				19 km	206.17		998 m