

# KLBB

LUBBOCK PRESTON SMITH INTL


# KABI

Abilene Regional

2024/05/05 0515Z

KLBB WABVI KABI

131.11 nm / 242.82 km

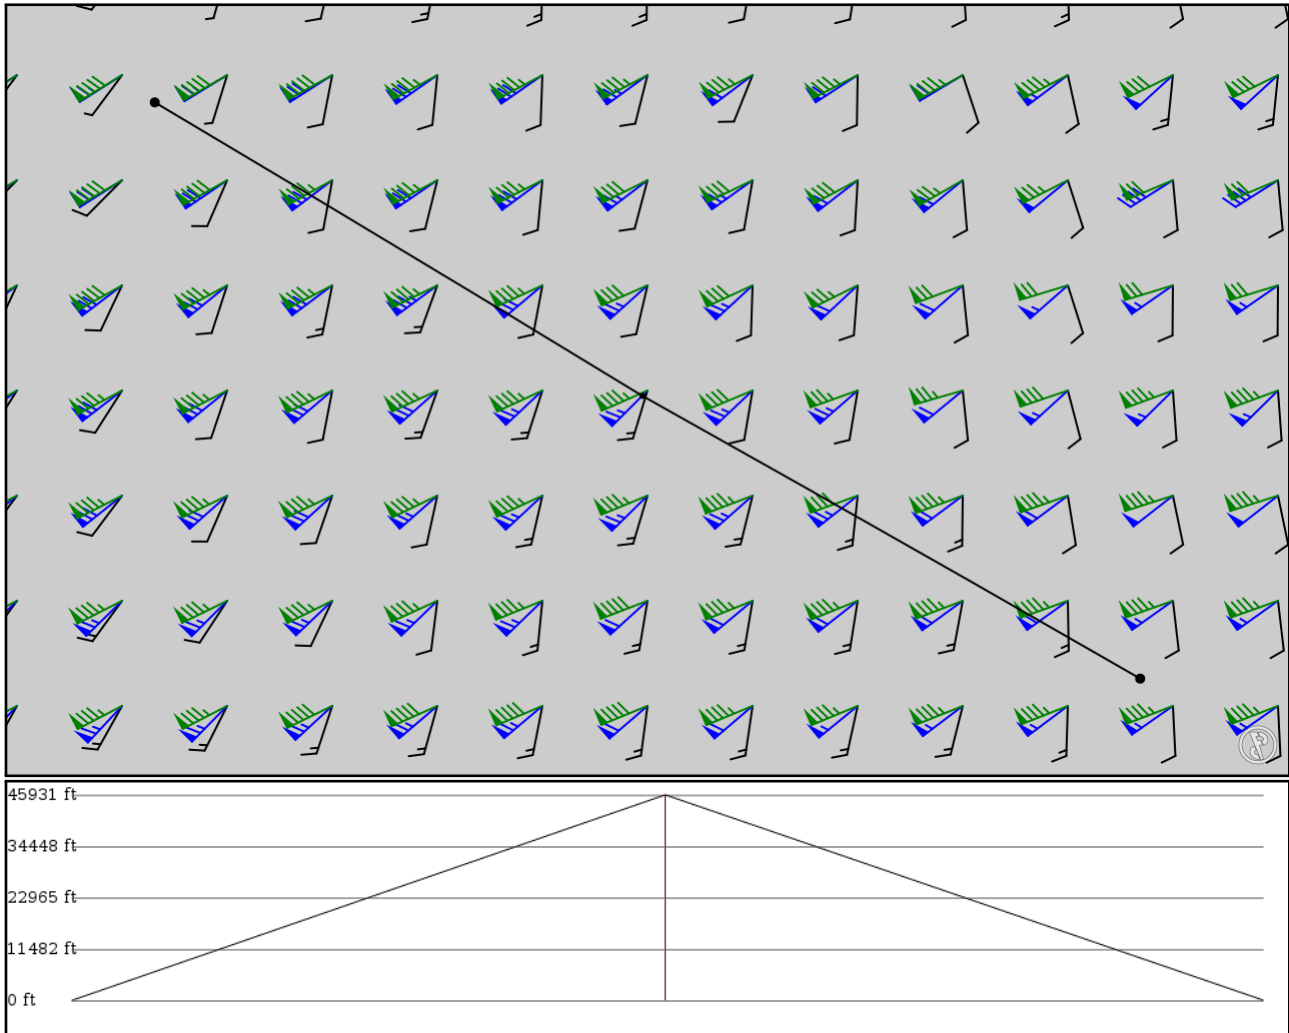

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLBB APT	-	33.66160 -101.81900	0 ft 0 m	-	LUBBOCK PRESTON SMITH INTL
WABVI FIX	-	33.02560 -100.76200	14,000 ft 4,267 m	65	-
KABI APT	-	32.41320 -99.68320	0 ft 0 m	65	Abilene Regional

## KLBB

Region: UNITED STATES  
Timezone: AMERICA/CHICAGO  
Runways: 3

Elevation: 3,282 ft / 1,000 m  
Location: 33.661600 -101.819000  
Magnetic Var: 5.470 E

## METAR

KLBB 050453Z 05008KT 10SM OVC009 14/12 A2998 RMK A02 SLP125 T01390122

## TAF

TAF AMD KLBB 050121Z 0501/0524 06015KT P6SM SCT015 OVC025 FM050400 08008KT P6SM OVC007 FM050900 08007KT 4SM BR SCT

## Frequencies

TWR - 120.50 MHz - LUBBOCK TOWER  
REC - 125.30 MHz - ATIS  
DEP - 119.90 MHz - LUBBOCK DEPARTURE  
GND - 121.90 MHz - LUBBOCK GROUND  
APP - 119.90 MHz - LUBBOCK APPROACH  
CLD - 125.80 MHz - CLEARANCE DELIVERY

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17L	75 ft	2,896 ft	179.64	ASPHALT	0 ft	0 ft
	23 m	883 m	174.17		0 m	0 m
35R	75 ft	2,896 ft	359.64	ASPHALT	0 ft	59 ft
	23 m	883 m	354.17		0 m	18 m
08	151 ft	8,010 ft	89.66	CONCRETE	0 ft	187 ft
	46 m	2,441 m	84.19		0 m	57 m
26	151 ft	8,010 ft	269.67	CONCRETE	0 ft	190 ft
	46 m	2,441 m	264.20		0 m	58 m
17R	151 ft	11,510 ft	179.66	CONCRETE	0 ft	210 ft
	46 m	3,508 m	174.19		0 m	64 m
35L	151 ft	11,510 ft	359.66	CONCRETE	0 ft	210 ft
	46 m	3,508 m	354.19		0 m	64 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17R	DME	ILBB	109.50 MHz	18 nm	-	-	3,257 ft
				33 km	-		3,257 m
17R	LOC-ILS	ILBB	109.50 MHz	18 nm	179.66	-	3,282 ft
				33 km	174.19		3,282 m
26	LOC-ILS	ILDT	111.90 MHz	18 nm	269.66	-	3,282 ft
				33 km	264.19		3,282 m
17R	GS	ILBB	109.50 MHz	10 nm	179.66	3.00	3,282 ft
				19 km	174.19		3,282 m
26	GS	ILDT	111.90 MHz	10 nm	269.66	3.00	3,282 ft
				19 km	264.19		3,282 m

## KABI

Region: UNITED STATES  
Timezone: AMERICA/CHICAGO  
Runways: 3

Elevation: 1,790 ft / 546 m  
Location: 32.413200 -99.683200  
Magnetic Var: 4.262 E

## METAR

KABI 050452Z 19006KT 10SM SCT008 BKN035 OVC060 18/18 A2999 RMK A02 SLP135 T01780178 \$

## TAF

TAF AMD KABI 050314Z 0503/0524 10010KT 6SM -RA BR SCT015 OVC070 FM050500 VRB06KT P6SM VCSH SCT025 OVC150 FM051000

## Frequencies

COM - 122.95 MHz - ABILINE RGL UNICOM	REC - 118.25 MHz - ABILINE RGL ATIS
GND - 121.70 MHz - ABILINE RGL GROUND	TWR - 120.10 MHz - ABILINE RGL TOWER
APP - 125.00 MHz - ABILINE RGL APPROACH	DEP - 125.00 MHz - ABILINE RGL DEPARTURE
APP - 127.20 MHz - ABILINE RGL APPROACH	DEP - 127.20 MHz - ABILINE RGL DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	100 ft	3,684 ft	52.13	ASPHALT	0 ft	0 ft
	30 m	1,123 m	47.87		0 m	0 m
22	100 ft	3,684 ft	232.14	ASPHALT	0 ft	49 ft
	30 m	1,123 m	227.88		0 m	15 m
17L	150 ft	7,220 ft	179.76	ASPHALT	0 ft	0 ft
	46 m	2,201 m	175.49		0 m	0 m
35R	150 ft	7,220 ft	359.76	ASPHALT	0 ft	0 ft
	46 m	2,201 m	355.49		0 m	0 m
17R	150 ft	7,220 ft	179.76	ASPHALT	0 ft	0 ft
	46 m	2,201 m	175.50		0 m	0 m
35L	150 ft	7,220 ft	359.76	ASPHALT	0 ft	0 ft
	46 m	2,201 m	355.50		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
35R	DME	IABI	110.30 MHz	18 nm	-	-	1,817 ft
				33 km	-		1,817 m
35R	LOC-ILS	IABI	110.30 MHz	18 nm	359.76	-	1,790 ft
				33 km	355.50		1,790 m
17R	LOC-LOC	IEMB	109.08 MHz	18 nm	179.76	-	1,790 ft
				33 km	175.50		1,790 m
35R	GS	IABI	110.30 MHz	10 nm	359.76	3.00	1,790 ft
				19 km	355.50		1,790 m