

# ROAH

Naha


# VHHH

Hong Kong Intl

2024/05/29 0251Z

ROAH KAORU **Y74** BORDO **R583** PABSO **G587** APU **A1** HLG HLG **A1** MKG MKG **A1** MAGOG VHHH

820.63 nm / 1519.81 km

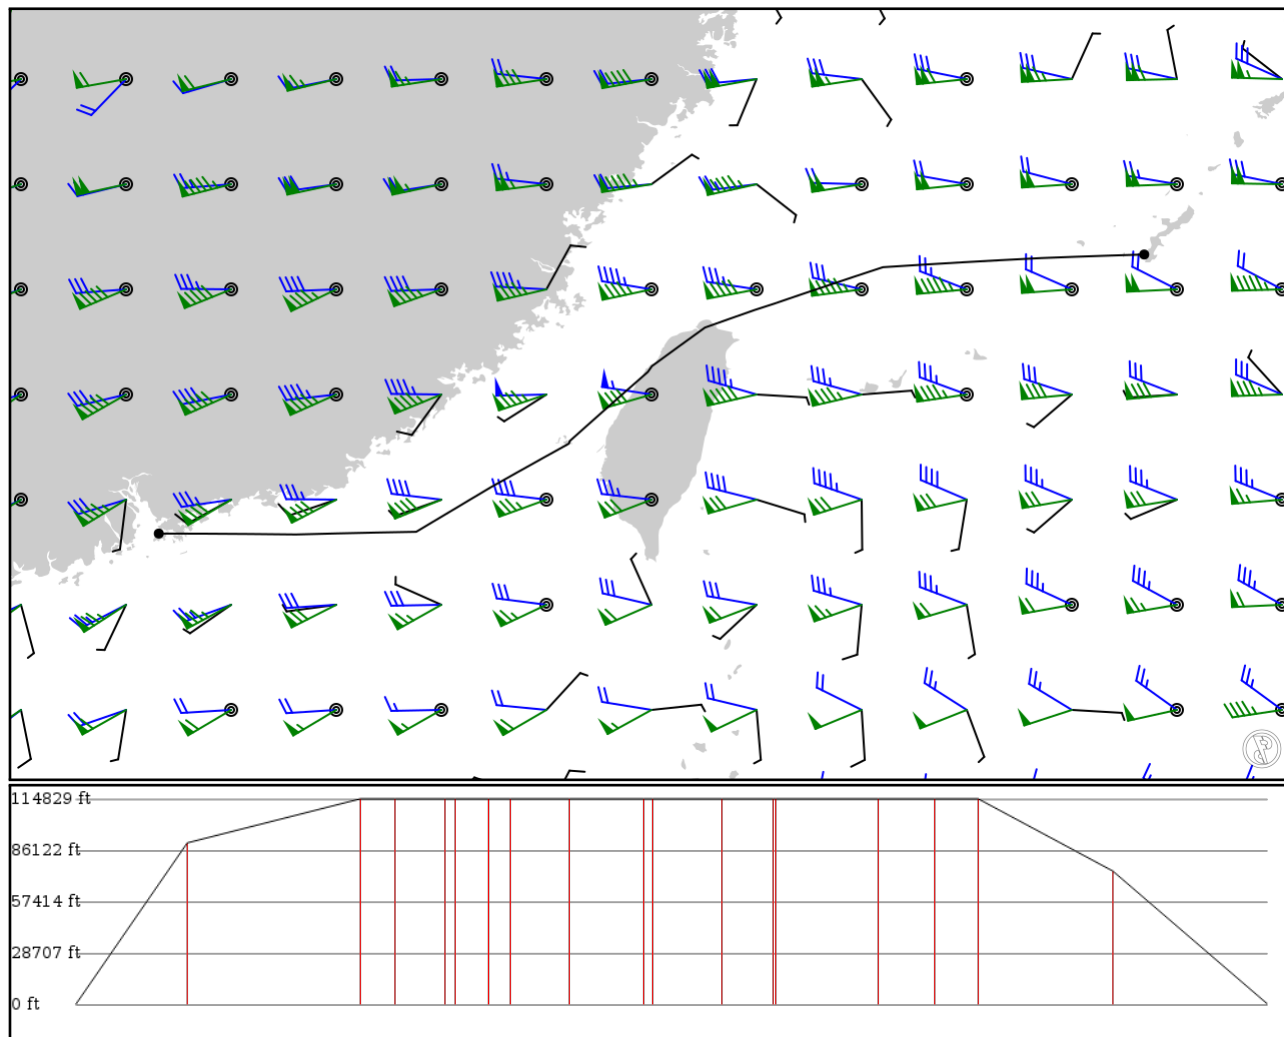

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
ROAH	-	26.19340	0 ft	-	Naha
APT	-	127.63900	0 m		
KAORU	-	26.14400	27,500 ft	77	-
FIX	-	126.20800	8,382 m		
BORDO	Y74	26.01670	35,000 ft	119	-
FIX	AWY-HI	124.00000	10,668 m		
KIKIT	R583	25.88220	35,000 ft	23	-
FIX	AWY-HI	123.59200	10,668 m		
ANGUS	R583	25.68420	35,000 ft	34	-
FIX	AWY-HI	123.00000	10,668 m		
PABSO	R583	25.63910	35,000 ft	7	-
FIX	AWY-HI	122.86600	10,668 m		
LEKOS	G587	25.50750	35,000 ft	22	-
FIX	AWY-HI	122.48100	10,668 m		
ROBIN	G587	25.41920	35,000 ft	15	-
FIX	AWY-HI	122.20800	10,668 m		
APU	G587	25.17690	35,000 ft	39	ANBU (TAIPEI)
VOR	AWY-HI	121.52200	10,668 m		
HLG	A1	24.64000	35,000 ft	51	HOULONG VOR-DME
DME	AWY-HI	120.78300	10,668 m		
HLG	-	24.55980	35,000 ft	5	HOULONG
VOR	-	120.72700	10,668 m		
SWORD	A1	24.00250	35,000 ft	48	-
FIX	AWY-HI	120.09400	10,668 m		
MKG	A1	23.59540	35,000 ft	35	MAGONG (PENGHU ISLAND)
VOR	AWY-HI	119.63700	10,668 m		
MKG	-	23.56170	35,000 ft	2	MAGONG TACAN
DME	-	119.62800	10,668 m		
KADLO	A1	22.95510	35,000 ft	70	-
FIX	AWY-HI	118.54200	10,668 m		
ANPOG	A1	22.60420	35,000 ft	38	-
FIX	AWY-HI	117.95400	10,668 m		
ELATO	A1	22.33330	35,000 ft	29	-
FIX	AWY-HI	117.50000	10,668 m		
MAGOG	A1	22.29610	22,700 ft	93	-
FIX	AWY-HI	115.82500	6,919 m		
VHHH	-	22.30890	0 ft	106	Hong Kong Intl
APT	-	113.91500	0 m		

## ROAH

Region: JAPAN  
Timezone: ASIA/TOKYO  
Runways: 2

Elevation: 11 ft / 3 m  
Location: 26.193400 127.639000  
Magnetic Var: 5.805 W

## METAR

ROAH 290230Z 36014KT 9999 FEW017 25/21 Q1007

## TAF

TAF ROAH 282306Z 2900/3006 05012KT 9999 FEW015 BKN025 BECMG 3000/3003 21010KT

## Frequencies

REC - 127.80 MHz - NAHA AIRPORT	TWR - 118.10 MHz - NAHA TOWER
TWR - 118.75 MHz - NAHA TOWER	TWR - 126.20 MHz - NAHA TOWER
GND - 121.80 MHz - NAHA GROUND	GND - 121.90 MHz - NAHA GROUND
CLD - 122.07 MHz - NAHA DELIVERY	APP - 119.10 MHz - NAHA APPROACH
APP - 126.50 MHz - NAHA APPROACH	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18R	194 ft	8,892 ft	177.57	ASPHALT	0 ft	1,037 ft
	59 m	2,710 m	183.38		0 m	316 m
36L	194 ft	8,892 ft	357.57	ASPHALT	0 ft	1,040 ft
	59 m	2,710 m	3.38		0 m	317 m
18L	145 ft	10,027 ft	177.59	ASPHALT	141 ft	489 ft
	44 m	3,056 m	183.40		43 m	149 m
36R	145 ft	10,027 ft	357.59	ASPHALT	0 ft	495 ft
	44 m	3,056 m	3.40		0 m	151 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18R	LOC-ILS	ION	110.15 MHz	18 nm	177.57	-	11 ft
				33 km	183.38		11 m
36L	LOC-ILS	IOW	111.70 MHz	18 nm	357.57	-	11 ft
				33 km	3.38		11 m
36R	LOC-ILS	IOK	110.30 MHz	18 nm	357.59	-	11 ft
				33 km	3.40		11 m
18R	GS	ION	110.15 MHz	10 nm	177.57	3.00	11 ft
				19 km	183.38		11 m
36L	GS	IOW	111.70 MHz	10 nm	357.57	3.00	11 ft
				19 km	3.38		11 m
36R	GS	IOK	110.30 MHz	10 nm	357.59	3.00	11 ft
				19 km	3.40		11 m

## VHHH

Region: HONG KONG  
Timezone: UNKNOWN  
Runways: 2

Elevation: 27 ft / 8 m  
Location: 22.308900 113.915000  
Magnetic Var: 3.241 W

## METAR

VHHH 290230Z 08018KT 9999 FEW025 SCT045 27/18 Q1006 NOSIG

## TAF

TAF VHHH 290200Z 2903/3009 10015KT 9999 FEW020 SCT030 TX30/2906Z TX30/3006Z TN26/2922Z

## Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m