

KPHX

Phoenix Sky Harbor Intl


PANC

Ted Stevens Anchorage Intl

2024/05/07 0452Z

KPHX KIDDR J11 CORKR Q35 IMB J523 WANTA J54 TOU J523 YZP TR19 FRIED J804R NOWEL PANC

2249.72 nm / 4166.49 km

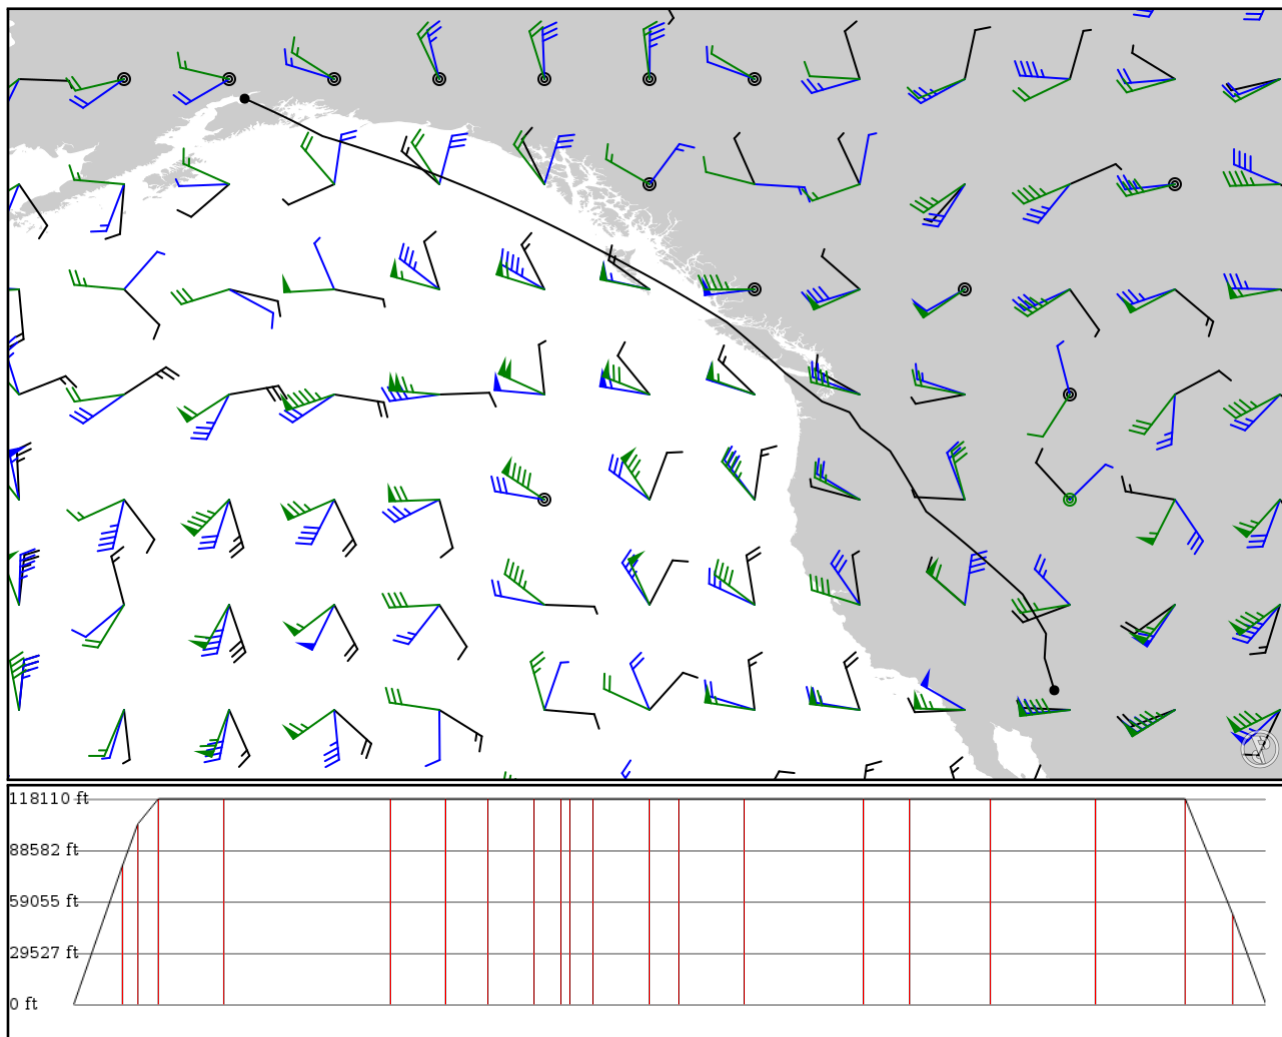

Notes

Basic altitude profile:

- Ascent Rate: 2000ft/min
- Ascent Speed: 450kts
- Cruise Altitude: 36000ft
- Cruise Speed: 460kts
- Descent Rate: 2000ft/min
- Descent Speed: 275kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KPHX APT	-	33.43360 -112.01200	0 ft 0 m	-	Phoenix Sky Harbor Intl
KIDDR FIX	-	34.94440 -112.46700	24,300 ft 7,407 m	93	-
NAVHO FIX	J11 AWY-HI	35.40700 -112.44000	31,600 ft 9,632 m	27	-
CORKR FIX	J11 AWY-HI	36.08400 -112.40000	36,000 ft 10,973 m	40	-
WINEN FIX	Q35 AWY-HI	37.93330 -113.50000	36,000 ft 10,973 m	122	-
NEERO FIX	Q35 AWY-HI	41.81760 -118.02500	36,000 ft 10,973 m	312	-
KOATA FIX	Q35 AWY-HI	43.43660 -118.96800	36,000 ft 10,973 m	105	-
IMB VOR	Q35 AWY-HI	44.64840 -119.71200	36,000 ft 10,973 m	79	KIMBERLY
LTJ VOR	J523 AWY-HI	45.71360 -121.10100	36,000 ft 10,973 m	86	KLICKITAT (THE DALLES)
WANTA FIX	J523 AWY-HI	46.47330 -121.62400	36,000 ft 10,973 m	50	-
SUMMA FIX	J54 AWY-HI	46.61790 -121.98800	36,000 ft 10,973 m	17	-
OLM VOR	J54 AWY-HI	46.97160 -122.90200	36,000 ft 10,973 m	43	OLYMPIA
TOU VOR	J54 AWY-HI	48.29990 -124.62700	36,000 ft 10,973 m	106	TATOOSH (NEAH BAY)
INHAM FIX	J523 AWY-HI	49.05220 -125.45500	36,000 ft 10,973 m	55	-
YZT VOR	J523 AWY-HI	50.68410 -127.36500	36,000 ft 10,973 m	122	PORT HARDY
YZP VOR	J523 AWY-HI	53.25220 -131.80700	36,000 ft 10,973 m	225	SANDSPIT
FRIED FIX	TR19 AWY-HI	54.22190 -133.63200	36,000 ft 10,973 m	87	-
EEDEN FIX	J804R AWY-HI	55.89960 -137.00200	36,000 ft 10,973 m	153	-
SNOUT FIX	J804R AWY-HI	57.89070 -141.75500	36,000 ft 10,973 m	196	-
MDO VOR	J804R AWY-HI	59.42180 -146.35000	36,000 ft 10,973 m	170	MIDDLETON ISLAND
NOWEL FIX	J804R AWY-HI	60.48390 -148.47500	15,800 ft 4,816 m	90	-
PANC APT	-	61.17430 -149.99800	0 ft 0 m	60	Ted Stevens Anchorage Intl

KPHX

Region: UNITED STATES
Timezone: AMERICA/PHOENIX
Runways: 3

Elevation: 1,135 ft / 346 m
Location: 33.433600 -112.012000
Magnetic Var: 9.721 E

METAR

KPHX 070351Z 22007KT 10SM CLR 26/M08 A2983 RMK A02 SLP088 T02611083

TAF

TAF AMD KPHX 070239Z 0703/0806 24007KT P6SM FEW250 FM070900 10005KT P6SM SKC FM071800 24007KT P6SM SKC TEMPO 0722/

Frequencies

REC - 127.57 MHz - ATIS	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 119.75 MHz - GROUND NORTH	GND - 132.55 MHz - GROUND SOUTH
TWR - 118.70 MHz - TOWER NORTH	TWR - 120.90 MHz - TOWER SOUTH
APP - 128.65 MHz - PHOENIX APPROACH	APP - 120.70 MHz - PHOENIX APPROACH
DEP - 124.10 MHz - PHOENIX APPROACH	DEP - 126.80 MHz - PHOENIX DEPARTURE
DEP - 124.90 MHz - PHOENIX DEPARTURE	DEP - 123.70 MHz - PHOENIX DEPARTURE
DEP - 119.20 MHz - PHOENIX DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	151 ft	11,500 ft	90.06	CONCRETE	912 ft	0 ft
	46 m	3,505 m	80.34		278 m	0 m
26	151 ft	11,500 ft	270.08	CONCRETE	0 ft	0 ft
	46 m	3,505 m	260.36		0 m	0 m
07L	151 ft	10,308 ft	90.04	CONCRETE	0 ft	0 ft
	46 m	3,142 m	80.31		0 m	0 m
25R	151 ft	10,308 ft	270.06	CONCRETE	0 ft	0 ft
	46 m	3,142 m	260.33		0 m	0 m
07R	151 ft	7,806 ft	90.04	CONCRETE	0 ft	0 ft
	46 m	2,379 m	80.31		0 m	0 m
25L	151 ft	7,806 ft	270.05	CONCRETE	0 ft	0 ft
	46 m	2,379 m	260.33		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IPHX	111.50 MHz	18 nm	-	-	1,142 ft
				33 km	-		1,142 m
07R	DME	IAHA	110.75 MHz	18 nm	-	-	1,135 ft
				33 km	-		1,135 m
08	DME	ISYQ	111.75 MHz	18 nm	-	-	1,149 ft
				33 km	-		1,149 m
25L	DME	IRJG	110.75 MHz	18 nm	-	-	1,135 ft
				33 km	-		1,135 m
26	DME	CWJ	111.75 MHz	18 nm	-	-	1,119 ft
				33 km	-		1,119 m
07L	LOC-ILS	IPHX	111.50 MHz	18 nm	90.05	-	1,135 ft
				33 km	80.33		1,135 m
07R	LOC-ILS	IAHA	110.75 MHz	18 nm	90.04	-	1,135 ft
				33 km	80.32		1,135 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	LOC-ILS	ISYQ	111.75 MHz	18 nm	90.07	-	1,135 ft
				33 km	80.35		1,135 m
25L	LOC-ILS	IRJG	110.75 MHz	18 nm	270.04	-	1,135 ft
				33 km	260.32		1,135 m
26	LOC-ILS	ICWJ	111.75 MHz	18 nm	270.07	-	1,135 ft
				33 km	260.35		1,135 m
07L	GS	IPHX	111.50 MHz	10 nm	90.05	3.01	1,135 ft
				19 km	80.33		1,135 m
07R	GS	IAHA	110.75 MHz	10 nm	90.04	3.01	1,135 ft
				19 km	80.32		1,135 m
08	GS	ISYQ	111.75 MHz	10 nm	90.70	3.01	1,135 ft
				19 km	80.98		1,135 m
25L	GS	IRJG	110.75 MHz	10 nm	270.04	3.00	1,135 ft
				19 km	260.32		1,135 m
26	GS	ICWJ	111.75 MHz	10 nm	270.70	3.00	1,135 ft
				19 km	260.98		1,135 m

PANC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 3

Elevation: 151 ft / 46 m

Location: 61.174300 -149.998000

Magnetic Var: 14.028 E

METAR

PANC 070353Z 30005KT 10SM FEW038 BKN070 OVC100 05/03 A2958

TAF

TAF AMD PANC 070256Z 0703/0806 30008KT P6SM FEW035 BKN070 FM070600 16012G20KT P6SM SCT045 BKN070 FM071000 15008KT

Frequencies

REC - 135.50 MHz - D-ATIS

GND - 121.90 MHz - ANCHORAGE GROUND

CLD - 119.40 MHz - CLEARANCE DELIVERY

APP - 118.60 MHz - ANCHORAGE APPROACH

APP - 123.80 MHz - ANCHORAGE APPROACH

DEP - 118.60 MHz - ANCHORAGE DEPARTURE

DEP - 123.80 MHz - ANCHORAGE DEPARTURE

COM - 122.95 MHz - UNICOM

TWR - 118.30 MHz - ANCHORAGE TOWER

CLD - 128.65 MHz - CLEARANCE DELIVERY

APP - 119.10 MHz - ANCHORAGE APPROACH

APP - 126.40 MHz - ANCHORAGE APPROACH

DEP - 119.10 MHz - ANCHORAGE DEPARTURE

DEP - 126.40 MHz - ANCHORAGE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	12,357 ft	89.84	ASPHALT	0 ft	0 ft
	61 m	3,767 m	75.81		0 m	0 m
25L	200 ft	12,357 ft	269.90	ASPHALT	0 ft	194 ft
	61 m	3,767 m	255.87		0 m	59 m
07L	150 ft	10,566 ft	89.88	ASPHALT	0 ft	387 ft
	46 m	3,221 m	75.85		0 m	118 m
25R	150 ft	10,566 ft	269.93	ASPHALT	0 ft	387 ft
	46 m	3,221 m	255.90		0 m	118 m
15	200 ft	10,847 ft	164.89	ASPHALT	0 ft	397 ft
	61 m	3,306 m	150.86		0 m	121 m
33	200 ft	10,847 ft	344.90	ASPHALT	463 ft	236 ft
	61 m	3,306 m	330.88		141 m	72 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	ITGN	109.90 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07R	DME	IANC	111.30 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
15	DME	IBSC	111.75 MHz	18 nm	-	-	152 ft
				33 km	-		152 m
07L	LOC-ILS	ITGN	109.90 MHz	18 nm	89.90	-	151 ft
				33 km	75.87		151 m
07R	LOC-ILS	IANC	111.30 MHz	18 nm	89.87	-	151 ft
				33 km	75.84		151 m
15	LOC-ILS	IBSC	111.75 MHz	18 nm	164.90	-	151 ft
				33 km	150.87		151 m
07L	GS	ITGN	109.90 MHz	10 nm	89.90	3.00	151 ft
				19 km	75.87		151 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	IANC	111.30 MHz	10 nm	89.87	3.00	151 ft
				19 km	75.84		151 m
15	GS	IBSC	111.75 MHz	10 nm	164.90	3.00	151 ft
				19 km	150.87		151 m