


2024/06/07 1954Z

UTAK TUNEK **A909** RODAR **M11** AMOKU UBBB

140.49 nm / 260.19 km

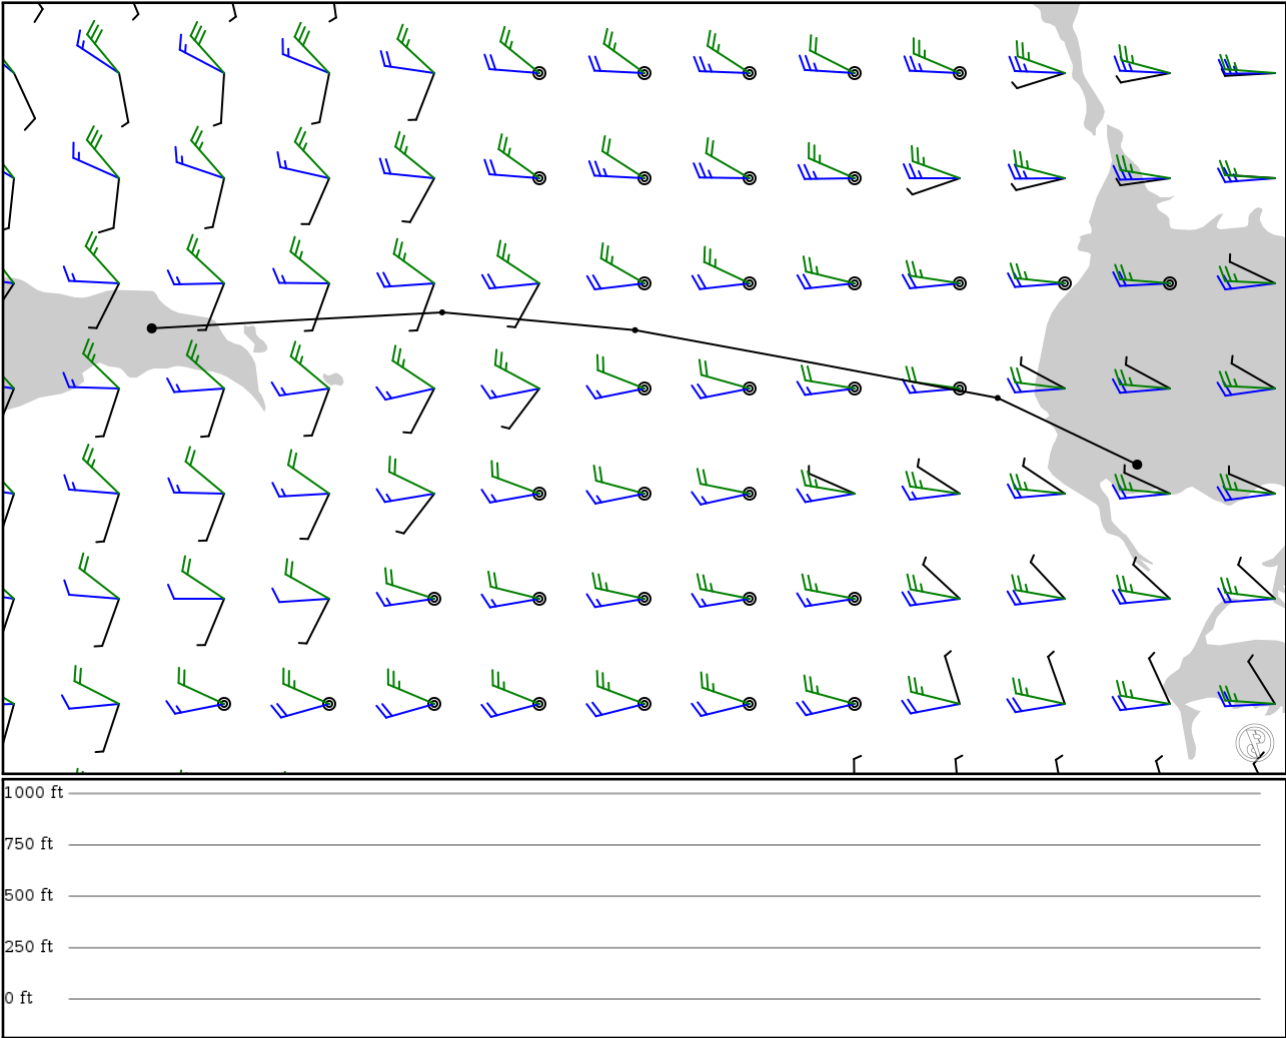

Notes

Requested: UTAK TUNEK A909 RODAR M11 AMOKU UBBB

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
UTAK	-	40.06330	0 ft	-	Turkmenbashi
APT	-	53.00720	0 m	-	
TUNEK	-	40.26330	0 ft	22	-
FIX	-	52.58830	0 m	-	-
RODAR	A909	40.46670	0 ft	51	-
FIX	AWY-HI	51.50000	0 m	-	-
AMOKU	M11	40.52000	0 ft	26	-
FIX	AWY-HI	50.92110	0 m	-	-
UBBB	-	40.47210	0 ft	39	Baku Heydar Aliyev Intl
APT	-	50.04940	0 m	-	

UTAK

Region: TAJIKISTAN, TURKMENISTAN AND UZBEKISTAN Elevation: 283 ft / 86 m
Timezone: ASIA/ASHGABAT Location: 40.063300 53.007200
Runways: 3 Magnetic Var: 6.411 E

METAR

UTAK 071900Z 02004KT CAVOK 23/05 Q1011 R34L/CLRD70 NOSIG

TAF

TAF UTAK 071630Z 0718/0818 34014KT CAVOK TEMPO 0718/0722 30012KT

Frequencies

APP - 120.00 MHz - TURKMENBASHI RADAR DEP - 120.00 MHz - TURKMENBASHI RADAR
TWR - 124.00 MHz - TURKMENBASHI TOWER GND - 121.70 MHz - TURKMENBASHI GROUND
REC - 133.20 MHz - TURKMENBASHI INFORMATION

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	144 ft	8,153 ft	166.52	CONCRETE	0 ft	0 ft
	44 m	2,485 m	160.11		0 m	0 m
34R	144 ft	8,153 ft	346.52	CONCRETE	0 ft	0 ft
	44 m	2,485 m	340.11		0 m	0 m
16R	148 ft	11,503 ft	166.51	CONCRETE	0 ft	0 ft
	45 m	3,506 m	160.10		0 m	0 m
34L	148 ft	11,503 ft	346.51	CONCRETE	0 ft	0 ft
	45 m	3,506 m	340.10		0 m	0 m
16	148 ft	8,171 ft	166.63	DIRT	0 ft	0 ft
	45 m	2,490 m	160.22		0 m	0 m
34	148 ft	8,171 ft	346.63	DIRT	0 ft	0 ft
	45 m	2,490 m	340.22		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16R	LOC-ILS	ITR	111.70 MHz	18 nm	166.51	-	283 ft
				33 km	160.10		283 m
34L	LOC-ILS	ITL	109.10 MHz	18 nm	346.51	-	283 ft
				33 km	340.10		283 m
16R	GS	ITR	111.70 MHz	10 nm	166.51	3.00	283 ft
				19 km	160.10		283 m
34L	GS	ITL	109.10 MHz	10 nm	346.51	3.50	283 ft
				19 km	340.10		283 m

UBBB

Region: AZERBAIJAN
Timezone: ASIA/BAKU
Runways: 2

Elevation: 6 ft / 2 m
Location: 40.472100 50.049400
Magnetic Var: 6.675 E

METAR

UBBB 071930Z 33008KT CAVOK 22/16 Q1011 NOSIG

TAF

TAF TAF UBBB 071659Z 0718/0818 32012KT CAVOK TX30/0810Z TN20/0802Z TEMPO 0720/0802 35018KT SCT012 FEW050CB TEMPO

Frequencies

REC - 126.80 MHz - BAKU ATIS
TWR - 119.20 MHz - BAKU TOWER
APP - 128.00 MHz - BAKU RADAR

GND - 121.70 MHz - BAKU GROUND
APP - 129.30 MHz - BAKU APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17	167 ft	10,509 ft	179.35	ASPHALT	0 ft	256 ft
	51 m	3,203 m	172.68		0 m	78 m
35	167 ft	10,509 ft	359.36	ASPHALT	486 ft	217 ft
	51 m	3,203 m	352.68		148 m	66 m
16	197 ft	13,136 ft	166.52	ASPHALT	0 ft	289 ft
	60 m	4,004 m	159.84		0 m	88 m
34	197 ft	13,136 ft	346.52	ASPHALT	0 ft	295 ft
	60 m	4,004 m	339.85		0 m	90 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16	LOC-ILS	IBI	109.50 MHz	18 nm	166.53	-	6 ft
				33 km	159.85		6 m
17	LOC-ILS	IBU	110.50 MHz	18 nm	179.35	-	6 ft
				33 km	172.67		6 m
34	LOC-ILS	IBN	111.70 MHz	18 nm	346.53	-	6 ft
				33 km	339.85		6 m
35	LOC-ILS	IBA	109.30 MHz	18 nm	359.35	-	6 ft
				33 km	352.67		6 m
16	GS	IBI	109.50 MHz	10 nm	166.53	3.00	6 ft
				19 km	159.85		6 m
17	GS	IBU	110.50 MHz	10 nm	179.35	3.00	6 ft
				19 km	172.67		6 m
34	GS	IBN	111.70 MHz	10 nm	346.53	3.00	6 ft
				19 km	339.85		6 m
35	GS	IBA	109.30 MHz	10 nm	359.35	3.00	6 ft
				19 km	352.67		6 m