

KPHX

Phoenix Sky Harbor Intl


KLAS

Mc Carran Intl

2024/05/06 2217Z

KPHX HIPPI JAWSY KLAS

224.15 nm / 415.12 km

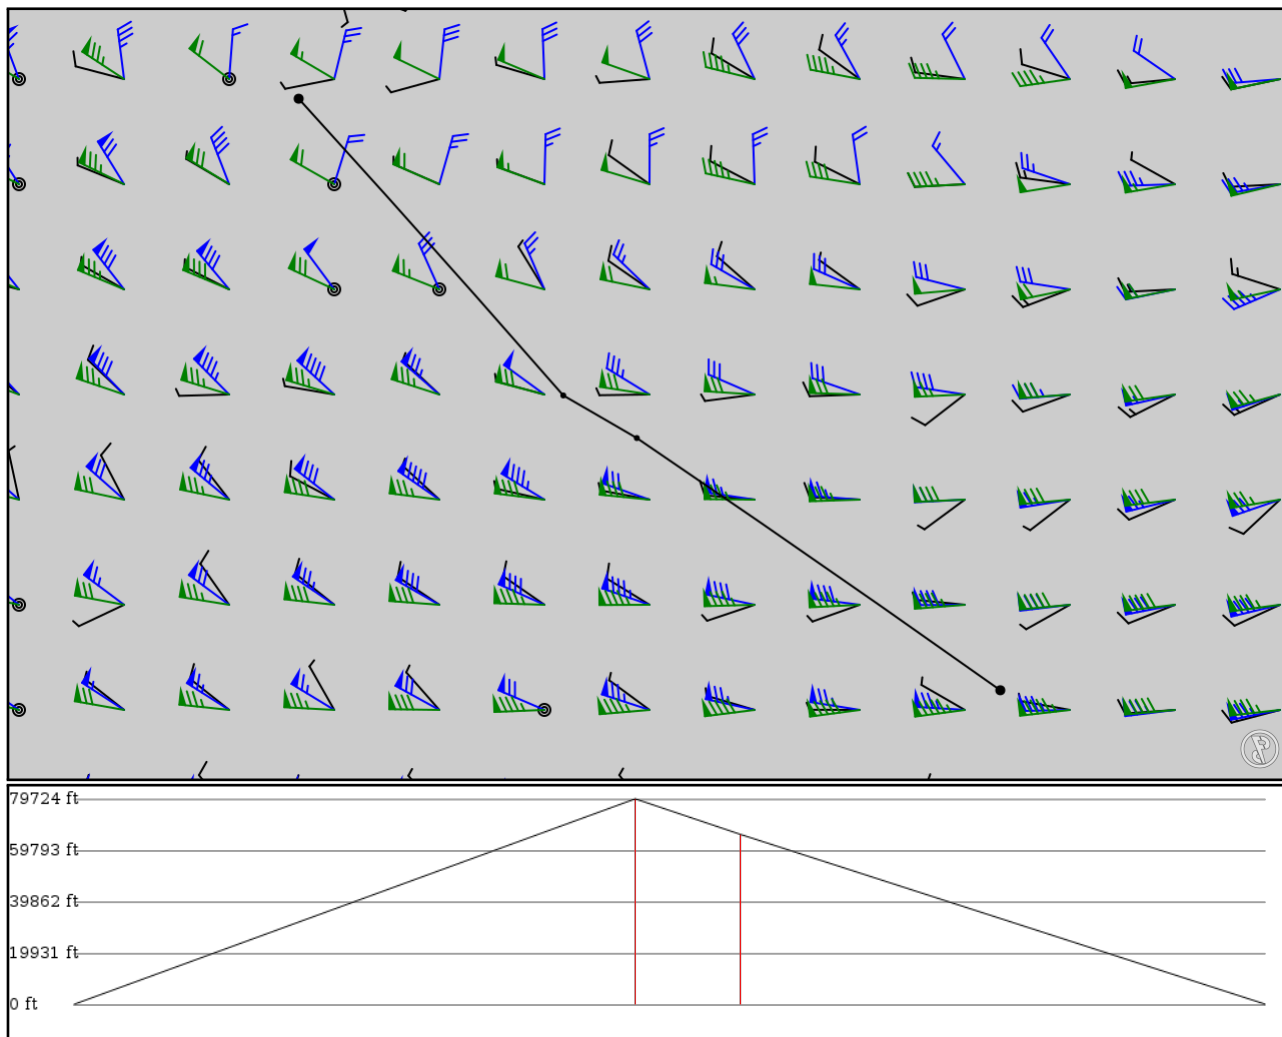

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 30000ft
- Cruise Speed: 320kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KPHX APT	-	33.43358 -112.01184	0 ft 0 m	-	Phoenix Sky Harbor Intl
HIPPI FIX	-	34.56229 -113.63937	24,300 ft 7,407 m	105 -	
JAWSY FIX	-	34.75301 -113.96864	20,100 ft 6,126 m	19 -	
KLAS APT	-	36.08097 -115.15345	0 ft 0 m	98	Mc Carran Intl

KPHX

Region: UNITED STATES
Timezone: AMERICA/PHOENIX
Runways: 3

Elevation: 1,135 ft / 346 m
Location: 33.433600 -112.012000
Magnetic Var: 9.722 E

METAR

KPHX 062151Z 26007G18KT 220V290 10SM FEW230 FEW270 29/M07 A2986 RMK A02 SLP098 T02891067

TAF

KPHX 062107Z 0621/0724 28009KT P6SM SKC FM070900 10005KT P6SM SKC FM071800 28007KT P6SM SKC

Frequencies

REC - 127.57 MHz - ATIS	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 119.75 MHz - GROUND NORTH	GND - 132.55 MHz - GROUND SOUTH
TWR - 118.70 MHz - TOWER NORTH	TWR - 120.90 MHz - TOWER SOUTH
APP - 128.65 MHz - PHOENIX APPROACH	APP - 120.70 MHz - PHOENIX APPROACH
DEP - 124.10 MHz - PHOENIX APPROACH	DEP - 126.80 MHz - PHOENIX DEPARTURE
DEP - 124.90 MHz - PHOENIX DEPARTURE	DEP - 123.70 MHz - PHOENIX DEPARTURE
DEP - 119.20 MHz - PHOENIX DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	151 ft	11,500 ft	90.06	CONCRETE	912 ft	0 ft
	46 m	3,505 m	80.34		278 m	0 m
26	151 ft	11,500 ft	270.08	CONCRETE	0 ft	0 ft
	46 m	3,505 m	260.36		0 m	0 m
07L	151 ft	10,308 ft	90.04	CONCRETE	0 ft	0 ft
	46 m	3,142 m	80.31		0 m	0 m
25R	151 ft	10,308 ft	270.06	CONCRETE	0 ft	0 ft
	46 m	3,142 m	260.33		0 m	0 m
07R	151 ft	7,806 ft	90.04	CONCRETE	0 ft	0 ft
	46 m	2,379 m	80.31		0 m	0 m
25L	151 ft	7,806 ft	270.05	CONCRETE	0 ft	0 ft
	46 m	2,379 m	260.33		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IPHX	111.50 MHz	18 nm	-	-	1,142 ft
				33 km	-		1,142 m
07R	DME	IAHA	110.75 MHz	18 nm	-	-	1,135 ft
				33 km	-		1,135 m
08	DME	ISYQ	111.75 MHz	18 nm	-	-	1,149 ft
				33 km	-		1,149 m
25L	DME	IRJG	110.75 MHz	18 nm	-	-	1,135 ft
				33 km	-		1,135 m
26	DME	CWJ	111.75 MHz	18 nm	-	-	1,119 ft
				33 km	-		1,119 m
07L	LOC-ILS	IPHX	111.50 MHz	18 nm	90.05	-	1,135 ft
				33 km	80.33		1,135 m
07R	LOC-ILS	IAHA	110.75 MHz	18 nm	90.04	-	1,135 ft
				33 km	80.32		1,135 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	LOC-ILS	ISYQ	111.75 MHz	18 nm	90.07	-	1,135 ft
				33 km	80.35		1,135 m
25L	LOC-ILS	IRJG	110.75 MHz	18 nm	270.04	-	1,135 ft
				33 km	260.32		1,135 m
26	LOC-ILS	ICWJ	111.75 MHz	18 nm	270.07	-	1,135 ft
				33 km	260.35		1,135 m
07L	GS	IPHX	111.50 MHz	10 nm	90.05	3.01	1,135 ft
				19 km	80.33		1,135 m
07R	GS	IAHA	110.75 MHz	10 nm	90.04	3.01	1,135 ft
				19 km	80.32		1,135 m
08	GS	ISYQ	111.75 MHz	10 nm	90.70	3.01	1,135 ft
				19 km	80.98		1,135 m
25L	GS	IRJG	110.75 MHz	10 nm	270.04	3.00	1,135 ft
				19 km	260.32		1,135 m
26	GS	ICWJ	111.75 MHz	10 nm	270.70	3.00	1,135 ft
				19 km	260.98		1,135 m

KLAS

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 2,180 ft / 664 m
Location: 36.080700 -115.153000
Magnetic Var: 11.049 E

METAR

KLAS 062156Z VRB05KT 10SM FEW250 25/M06 A2993 RMK A02 SLP117 T02501061

TAF

KLAS 062039Z 0621/0724 VRB05KT P6SM FEW250 FM070000 24010KT P6SM FEW250 FM071000 VRB06KT P6SM FEW250 FM071500 340

Frequencies

REC - 132.40 MHz - D-ATIS
CLD - 118.00 MHz - CLEARANCE DELIVERY
GND - 121.90 MHz - LAS VEGAS GROUND
TWR - 118.75 MHz - LAS VEGAS TOWER
APP - 125.60 MHz - LAS VEGAS APPROACH
DEP - 125.90 MHz - LAS VEGAS DEPARTURE

COM - 122.95 MHz - UNICOM
GND - 121.10 MHz - LAS VEGAS GROUND
TWR - 128.80 MHz - LAS VEGAS TOWER
TWR - 119.90 MHz - LAS VEGAS TOWER
APP - 125.02 MHz - LAS VEGAS APPROACH
DEP - 133.95 MHz - LAS VEGAS DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	151 ft	14,525 ft	89.92	CONCRETE	2,152 ft	0 ft
	46 m	4,427 m	78.87		656 m	0 m
26R	151 ft	14,525 ft	269.95	CONCRETE	1,414 ft	374 ft
	46 m	4,427 m	258.90		431 m	114 m
08R	151 ft	10,535 ft	89.92	CONCRETE	0 ft	381 ft
	46 m	3,211 m	78.87		0 m	116 m
26L	151 ft	10,535 ft	269.94	CONCRETE	0 ft	381 ft
	46 m	3,211 m	258.89		0 m	116 m
01R	151 ft	9,779 ft	24.82	CONCRETE	486 ft	400 ft
	46 m	2,981 m	13.77		148 m	122 m
19L	151 ft	9,779 ft	204.83	CONCRETE	876 ft	394 ft
	46 m	2,981 m	193.78		267 m	120 m
01L	151 ft	8,998 ft	24.82	CONCRETE	584 ft	400 ft
	46 m	2,743 m	13.78		178 m	122 m
19R	151 ft	8,998 ft	204.83	CONCRETE	0 ft	0 ft
	46 m	2,743 m	193.78		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	DME	ICUA	110.10 MHz	18 nm	-	-	2,092 ft
				33 km	-		2,092 m
26R	DME	ILAS	110.30 MHz	18 nm	-	-	2,203 ft
				33 km	-		2,203 m
01L	LOC-ILS	ICUA	110.10 MHz	18 nm	24.83	-	2,180 ft
				33 km	13.78		2,180 m
26L	LOC-ILS	IRLE	111.50 MHz	18 nm	269.93	-	2,180 ft
				33 km	258.88		2,180 m
26R	LOC-ILS	ILAS	110.30 MHz	18 nm	269.94	-	2,180 ft
				33 km	258.89		2,180 m
01L	GS	ICUA	110.10 MHz	10 nm	24.83	3.40	2,180 ft
				19 km	13.78		2,180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	GS	IRLE	111.50 MHz	10 nm	269.93	3.00	2,180 ft
				19 km	258.88		2,180 m
26R	GS	ILAS	110.30 MHz	10 nm	269.94	3.00	2,180 ft
				19 km	258.89		2,180 m