


2024/05/04 1744Z

LFLL PENDU **UL164** LUL **R112** OBORN EDDF

294.91 nm / 546.17 km

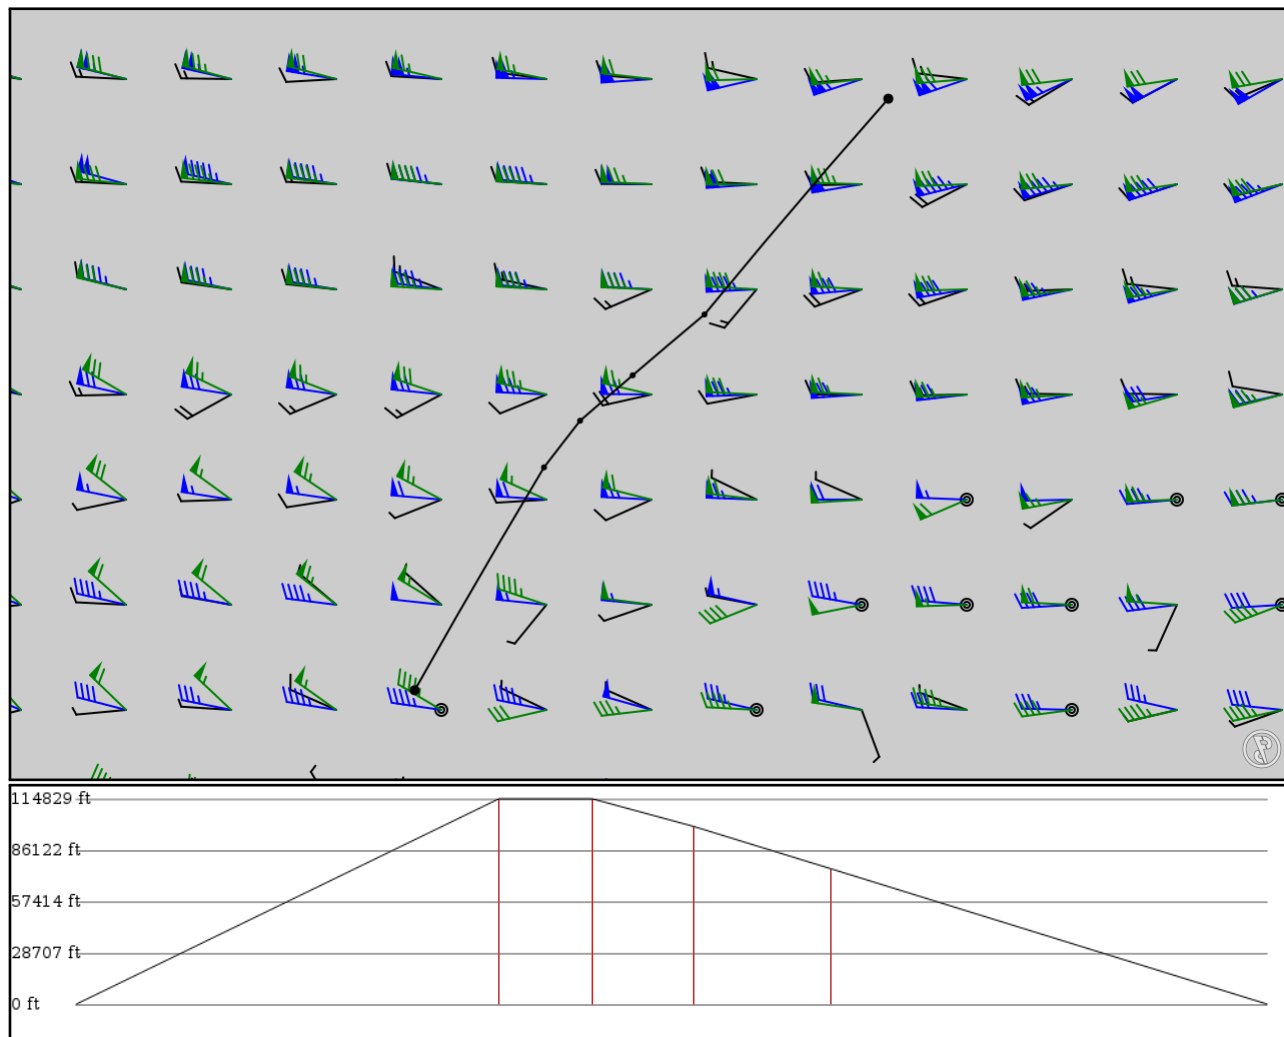

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFLL APT	-	45.72580 5.09073	0 ft 0 m	-	Lyon Saint Exupery
PENDU FIX	-	47.34890 6.03278	35,000 ft 10,668 m	104	-
LUL VOR	UL164 AWY-HI	47.68830 6.29558	35,000 ft 10,668 m	23	LUXEUIL
MIRGU FIX	R112 AWY-LO	48.01920 6.67883	30,300 ft 9,235 m	25	-
OBORN FIX	R112 AWY-LO	48.46190 7.20167	23,100 ft 7,041 m	33	-
EDDF APT	-	50.03260 8.54067	0 ft 0 m	107	Frankfurt

LFL

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 2

Elevation: 817 ft / 249 m
Location: 45.725800 5.090730
Magnetic Var: 2.256 E

METAR

LFL 041730Z 18013KT CAVOK 18/08 Q1013 BECMG RA

TAF

TAF LFL 041100Z 0412/0518 18012KT CAVOK TEMPO 0412/0506 18015G25KT -RA FEW030 BKN050 TEMPO 0512/0518 SHRA SCT070

Frequencies

REC - 126.17 MHz - SAINT EXUPERY ATIS	CLD - 121.65 MHz - SAINT EXUPERY DELIVERY
GND - 121.82 MHz - SAINT EXUPERY GROUND	TWR - 120.45 MHz - SAINT EXUPERY TOWER
APP - 120.22 MHz - LYON APPROACH	APP - 125.42 MHz - LYON APPROACH
APP - 125.80 MHz - LYON APPROACH	APP - 133.15 MHz - LYON APPROACH
APP - 136.07 MHz - LYON APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17R	145 ft	13,135 ft	175.14	ASPHALT	0 ft	190 ft
	44 m	4,003 m	172.89		0 m	58 m
35L	145 ft	13,135 ft	355.14	ASPHALT	0 ft	184 ft
	44 m	4,003 m	352.89		0 m	56 m
17L	148 ft	8,766 ft	175.14	ASPHALT	0 ft	59 ft
	45 m	2,672 m	172.88		0 m	18 m
35R	148 ft	8,766 ft	355.14	ASPHALT	0 ft	62 ft
	45 m	2,672 m	352.89		0 m	19 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17L	DME	LSS	109.10 MHz	18 nm	-	-	775 ft
				33 km	-		775 m
35L	DME	SAN	110.75 MHz	18 nm	-	-	810 ft
				33 km	-		810 m
35R	DME	LSN	111.50 MHz	18 nm	-	-	812 ft
				33 km	-		812 m
17L	LOC-ILS	LSS	109.10 MHz	18 nm	175.14	-	818 ft
				33 km	172.88		818 m
35L	LOC-ILS	SAN	110.75 MHz	18 nm	355.15	-	818 ft
				33 km	352.89		818 m
35R	LOC-ILS	LSN	111.50 MHz	18 nm	355.14	-	818 ft
				33 km	352.88		818 m
17L	GS	LSS	109.10 MHz	10 nm	175.14	3.00	818 ft
				19 km	172.88		818 m
35L	GS	SAN	110.75 MHz	10 nm	355.15	3.00	818 ft
				19 km	352.89		818 m
35R	GS	LSN	111.50 MHz	10 nm	355.14	3.00	818 ft
				19 km	352.88		818 m

EDDF

Region: GERMANY - CIVIL
Timezone: EUROPE/BERLIN
Runways: 4

Elevation: 362 ft / 110 m
Location: 50.032600 8.540670
Magnetic Var: 3.171 E

METAR

EDDF 041720Z AUTO 10007KT CAVOK 18/07 Q1010 NOSIG

TAF

TAF EDDF 041100Z 0412/0518 14006KT CAVOK PROB30 TEMPO 0418/0508 SHRA SCT015 BKN030TCU BECMG 0419/0422 20005KT BKN

Frequencies

REC - 118.02 MHz - ATIS ARRIVAL
GND - 121.80 MHz - GROUND
GND - 121.70 MHz - APRON RAMP/TAXI
GND - 121.85 MHz - APRON RAMP/TAXI
TWR - 118.77 MHz - TOWER
TWR - 124.85 MHz - TOWER
TWR - 136.50 MHz - TOWER
APP - 127.27 MHz - FRANKFURT DIRECT
APP - 125.35 MHz - LANGEN RADAR
APP - 120.80 MHz - LANGEN RADAR
APP - 136.12 MHz - LANGEN RADAR

REC - 118.72 MHz - ATIS DEPARTURE
GND - 121.65 MHz - APRON RAMP/TAXI
GND - 121.95 MHz - APRON RAMP/TAXI
GND - 121.75 MHz - APRON RAMP/TAXI
TWR - 119.90 MHz - TOWER
TWR - 127.32 MHz - TOWER
CLD - 121.90 MHz - CLEARANCE DELIVERY
APP - 118.50 MHz - FRANKFURT DIRECT
APP - 126.55 MHz - LANGEN RADAR
APP - 120.15 MHz - LANGEN RADAR
APP - 119.02 MHz - LANGEN RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	148 ft	9,194 ft	69.56	CONCRETE	0 ft	0 ft
	45 m	2,802 m	66.39		0 m	0 m
25R	148 ft	9,194 ft	249.59	CONCRETE	0 ft	0 ft
	45 m	2,802 m	246.42		0 m	0 m
07C	197 ft	13,134 ft	69.57	ASPHALT	0 ft	203 ft
	60 m	4,003 m	66.40		0 m	62 m
25C	197 ft	13,134 ft	249.61	ASPHALT	0 ft	935 ft
	60 m	4,003 m	246.44		0 m	285 m
07R	148 ft	13,134 ft	69.59	ASPHALT	0 ft	213 ft
	45 m	4,003 m	66.42		0 m	65 m
25L	148 ft	13,134 ft	249.63	ASPHALT	0 ft	1,775 ft
	45 m	4,003 m	246.46		0 m	541 m
18	148 ft	13,083 ft	179.64	ASPHALT	0 ft	0 ft
	45 m	3,988 m	176.47		0 m	0 m
36	148 ft	13,083 ft	359.64	ASPHALT	0 ft	121 ft
	45 m	3,988 m	356.47		0 m	37 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IFNE	111.75 MHz	18 nm	-	-	357 ft
				33 km	-		357 m
25C	DME	IFCW	111.55 MHz	18 nm	-	-	364 ft
				33 km	-		364 m
25R	DME	IFNW	111.35 MHz	18 nm	-	-	357 ft
				33 km	-		357 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07C	LOC-ILS	IFCE	110.55 MHz	18 nm	69.59	-	362 ft
				33 km	66.42		362 m
07L	LOC-ILS	IFNE	111.75 MHz	18 nm	69.58	-	362 ft
				33 km	66.41		362 m
07R	LOC-ILS	IFSE	110.95 MHz	18 nm	69.61	-	362 ft
				33 km	66.44		362 m
25C	LOC-ILS	IFCW	111.55 MHz	18 nm	249.59	-	362 ft
				33 km	246.42		362 m
25L	LOC-ILS	IFSW	111.15 MHz	18 nm	249.61	-	362 ft
				33 km	246.44		362 m
25R	LOC-ILS	IFNW	111.35 MHz	18 nm	249.58	-	362 ft
				33 km	246.41		362 m
07C	GS	IFCE	110.55 MHz	10 nm	69.59	3.00	362 ft
				19 km	66.42		362 m
07L	GS	IFNE	111.75 MHz	10 nm	69.58	3.00	362 ft
				19 km	66.41		362 m
07R	GS	IFSE	110.95 MHz	10 nm	69.61	3.00	362 ft
				19 km	66.44		362 m
25C	GS	IFCW	111.55 MHz	10 nm	249.59	3.00	362 ft
				19 km	246.42		362 m
25L	GS	IFSW	111.15 MHz	10 nm	249.61	3.00	362 ft
				19 km	246.44		362 m
25R	GS	IFNW	111.35 MHz	10 nm	249.58	3.00	362 ft
				19 km	246.41		362 m