


2024/05/12 0704Z

ZLXY YIJ **G212** KR ZBAA

512.87 nm / 949.84 km

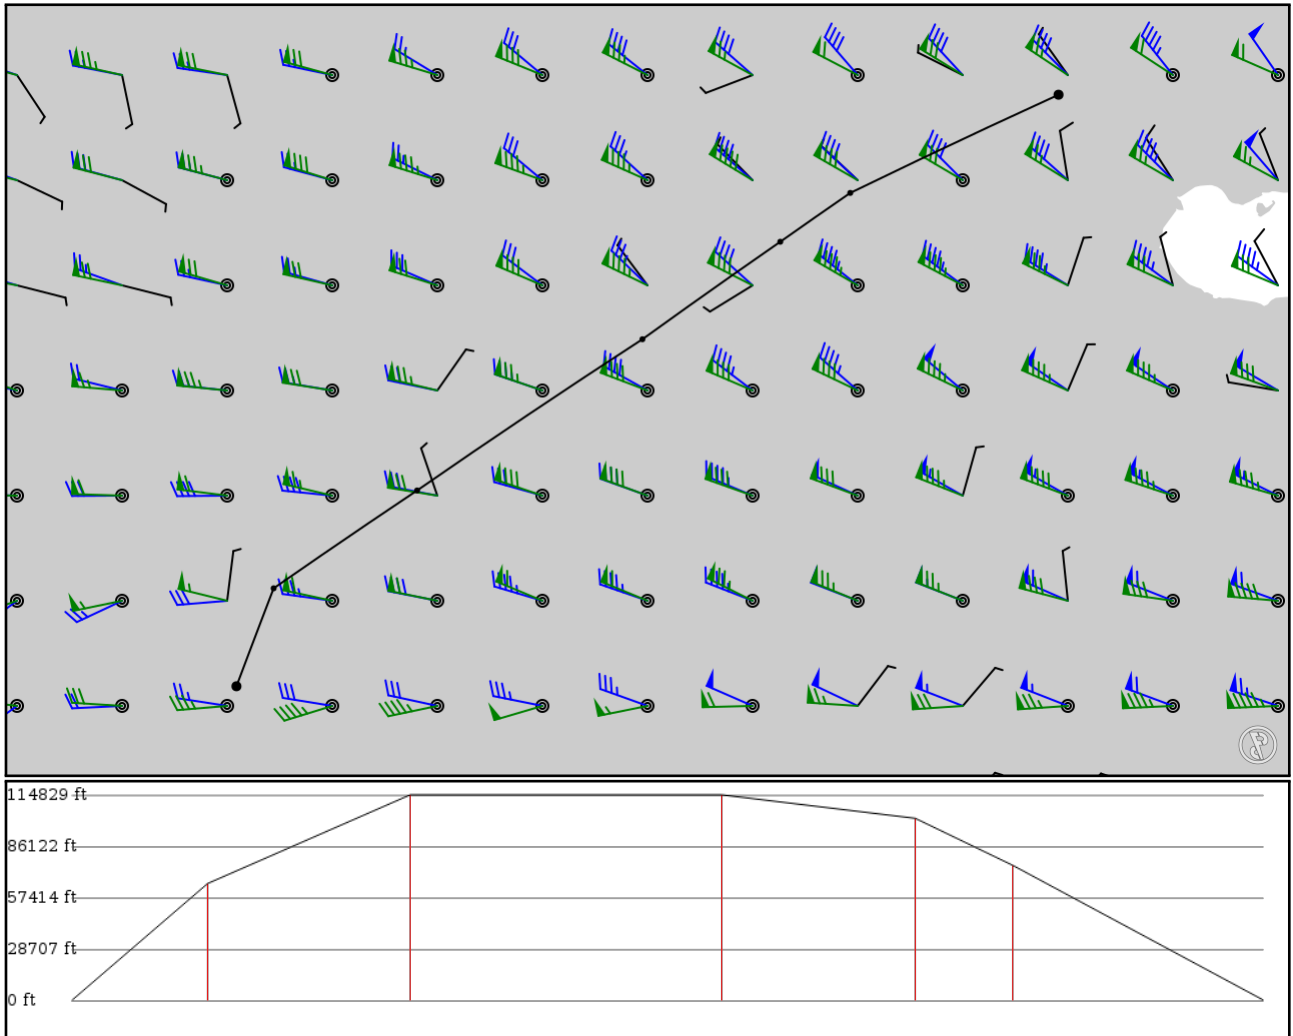

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 300ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
ZLXY APT	-	34.44698 108.75220	0 ft 0 m	-	Xianyang
YIJ VOR	-	35.38000 109.10667	19,900 ft 6,066 m	58	YIJUN VOR-DME
GUPAD FIX	G212 AWY-HI	36.31167 110.47333	35,000 ft 10,668 m	86	-
TYN VOR	G212 AWY-HI	37.75167 112.62000	35,000 ft 10,668 m	134	TAIYUAN VOR-DME
NONIT FIX	G212 AWY-HI	38.68000 113.93333	31,000 ft 9,449 m	83	-
KR NDB	G212 AWY-HI	39.14500 114.60000	23,000 ft 7,010 m	41	NANCHENGZI NDB
ZBAA APT	-	40.08012 116.58456	0 ft 0 m	107	CAPITAL INTL

ZLXY

Region: CHINA
Timezone: ASIA/CHONGQING
Runways: 2

Elevation: 1,572 ft / 479 m
Location: 34.439600 108.759000
Magnetic Var: 3.840 W

METAR

ZLXY 120600Z 17003MPS 130V200 CAVOK 29/11 Q1015 NOSIG

TAF

TAF ZLXY 120303Z 1206/1306 06004MPS 6000 NSC TX30/1207Z TN13/1222Z

Frequencies

REC - 127.45 MHz - ATIS ARRIVAL	REC - 128.65 MHz - ATIS DEPARTURE
TWR - 130.45 MHz - XIANYANG TOWER	TWR - 124.30 MHz - XIANYANG TOWER
TWR - 118.15 MHz - XIANYANG TOWER	CLD - 121.60 MHz - XIANYANG DELIVERY GROUND
GND - 121.80 MHz - XIANYANG GROUND	GND - 121.65 MHz - XIANYANG GROUND
APP - 126.55 MHz - XI'AN APPROACH	APP - 119.05 MHz - XI'AN APPROACH
APP - 119.90 MHz - XI'AN APPROACH	APP - 120.20 MHz - XI'AN APPROACH
APP - 121.40 MHz - XI'AN APPROACH	APP - 123.85 MHz - XI'AN APPROACH
APP - 125.10 MHz - XI'AN APPROACH	APP - 119.60 MHz - XI'AN APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05L	148 ft	9,837 ft	48.69	ASPHALT	0 ft	197 ft
	45 m	2,998 m	52.53		0 m	60 m
23R	148 ft	9,837 ft	228.70	ASPHALT	0 ft	197 ft
	45 m	2,998 m	232.54		0 m	60 m
05R	197 ft	12,465 ft	48.70	CONCRETE	0 ft	387 ft
	60 m	3,799 m	52.54		0 m	118 m
23L	197 ft	12,465 ft	228.72	CONCRETE	0 ft	394 ft
	60 m	3,799 m	232.56		0 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
05L	LOC-ILS	IGG	109.90 MHz	18 nm	48.70	-	1,572 ft
				33 km	52.54		1,572 m
23R	LOC-ILS	IMM	110.30 MHz	18 nm	228.70	-	1,572 ft
				33 km	232.54		1,572 m
05R	LOC-ILS	IXW	109.30 MHz	18 nm	48.71	-	1,572 ft
				33 km	52.55		1,572 m
23L	LOC-ILS	IAQ	111.10 MHz	18 nm	228.71	-	1,572 ft
				33 km	232.55		1,572 m
05L	GS	IGG	109.90 MHz	10 nm	48.70	3.00	1,572 ft
				19 km	52.54		1,572 m
23R	GS	IMM	110.30 MHz	10 nm	228.70	3.00	1,572 ft
				19 km	232.54		1,572 m
05R	GS	IXW	109.30 MHz	10 nm	48.71	3.00	1,572 ft
				19 km	52.55		1,572 m
23L	GS	IAQ	111.10 MHz	10 nm	228.71	3.00	1,572 ft
				19 km	232.55		1,572 m

ZBAA

Region: CHINA
Timezone: ASIA/SHANGHAI
Runways: 3

Elevation: 115 ft / 35 m
Location: 40.078700 116.595000
Magnetic Var: 7.353 W

METAR

ZBAA 120630Z VRB01MPS CAVOK 28/00 Q1013 NOSIG

TAF

TAF TAF ZBAA 120304Z 1206/1306 33003MPS CAVOK TX29/1207Z TN13/1221Z

Frequencies

REC - 127.60 MHz - ATIS	REC - 128.65 MHz - ATIS
CLD - 121.60 MHz - BEIJING DELIVERY	CLD - 121.65 MHz - BEIJING DELIVERY
GND - 121.90 MHz - BEIJING GROUND	GND - 121.80 MHz - BEIJING GROUND
GND - 121.70 MHz - BEIJING GROUND	GND - 121.75 MHz - BEIJING GROUND
GND - 121.85 MHz - BEIJING GROUND	GND - 122.22 MHz - BEIJING APRON
GND - 122.65 MHz - BEIJING APRON	TWR - 124.30 MHz - BEIJING TOWER
TWR - 118.50 MHz - BEIJING TOWER	TWR - 118.60 MHz - BEIJING TOWER
APP - 126.10 MHz - BEIJING APPROACH	APP - 119.00 MHz - BEIJING APPROACH
APP - 126.50 MHz - BEIJING APPROACH	APP - 121.10 MHz - BEIJING APPROACH
APP - 119.70 MHz - BEIJING APPROACH	APP - 124.70 MHz - BEIJING APPROACH
APP - 127.75 MHz - BEIJING APPROACH	APP - 120.60 MHz - BEIJING APPROACH
APP - 125.50 MHz - BEIJING APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01	195 ft	12,481 ft	353.17	CONCRETE	0 ft	394 ft
	59 m	3,804 m	0.53		0 m	120 m
19	195 ft	12,481 ft	173.17	CONCRETE	0 ft	397 ft
	59 m	3,804 m	180.52		0 m	121 m
18L	197 ft	12,493 ft	173.17	ASPHALT	0 ft	190 ft
	60 m	3,808 m	180.52		0 m	58 m
36R	197 ft	12,493 ft	353.17	ASPHALT	0 ft	190 ft
	60 m	3,808 m	0.53		0 m	58 m
18R	164 ft	10,512 ft	173.15	ASPHALT	0 ft	200 ft
	50 m	3,204 m	180.50		0 m	61 m
36L	164 ft	10,512 ft	353.15	ASPHALT	0 ft	200 ft
	50 m	3,204 m	0.50		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18R	DME	ILG	110.30 MHz	18 nm	-	-	135 ft
				33 km	-		135 m
01	LOC-ILS	INJ	108.50 MHz	18 nm	353.17	-	116 ft
				33 km	0.52		116 m
18L	LOC-ILS	IOR	109.30 MHz	18 nm	173.17	-	116 ft
				33 km	180.52		116 m
18R	LOC-ILS	ILG	110.30 MHz	18 nm	173.15	-	116 ft
				33 km	180.50		116 m
19	LOC-ILS	ISZ	108.90 MHz	18 nm	173.17	-	116 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	180.52		116 m
36L	LOC-ILS	IDK	111.70 MHz	18 nm	353.15	-	116 ft
				33 km	0.50		116 m
36R	LOC-ILS	IQU	109.90 MHz	18 nm	353.10	-	116 ft
				33 km	0.45		116 m
01	GS	INJ	108.50 MHz	10 nm	353.17	3.00	116 ft
				19 km	0.52		116 m
18L	GS	IOR	109.30 MHz	10 nm	173.17	3.00	116 ft
				19 km	180.52		116 m
18R	GS	ILG	110.30 MHz	10 nm	173.15	3.00	116 ft
				19 km	180.50		116 m
19	GS	ISZ	108.90 MHz	10 nm	173.17	3.20	116 ft
				19 km	180.52		116 m
36L	GS	IDK	111.70 MHz	10 nm	353.15	3.00	116 ft
				19 km	0.50		116 m
36R	GS	IQU	109.90 MHz	10 nm	353.17	3.00	116 ft
				19 km	0.52		116 m