

KLBB

LUBBOCK PRESTON SMITH INTL


KRKP

ARANSAS CO

2024/05/03 1015Z

KLBB HYMAN V76 SJT V68 CSI V161 SOMER KRKP

425.50 nm / 788.03 km

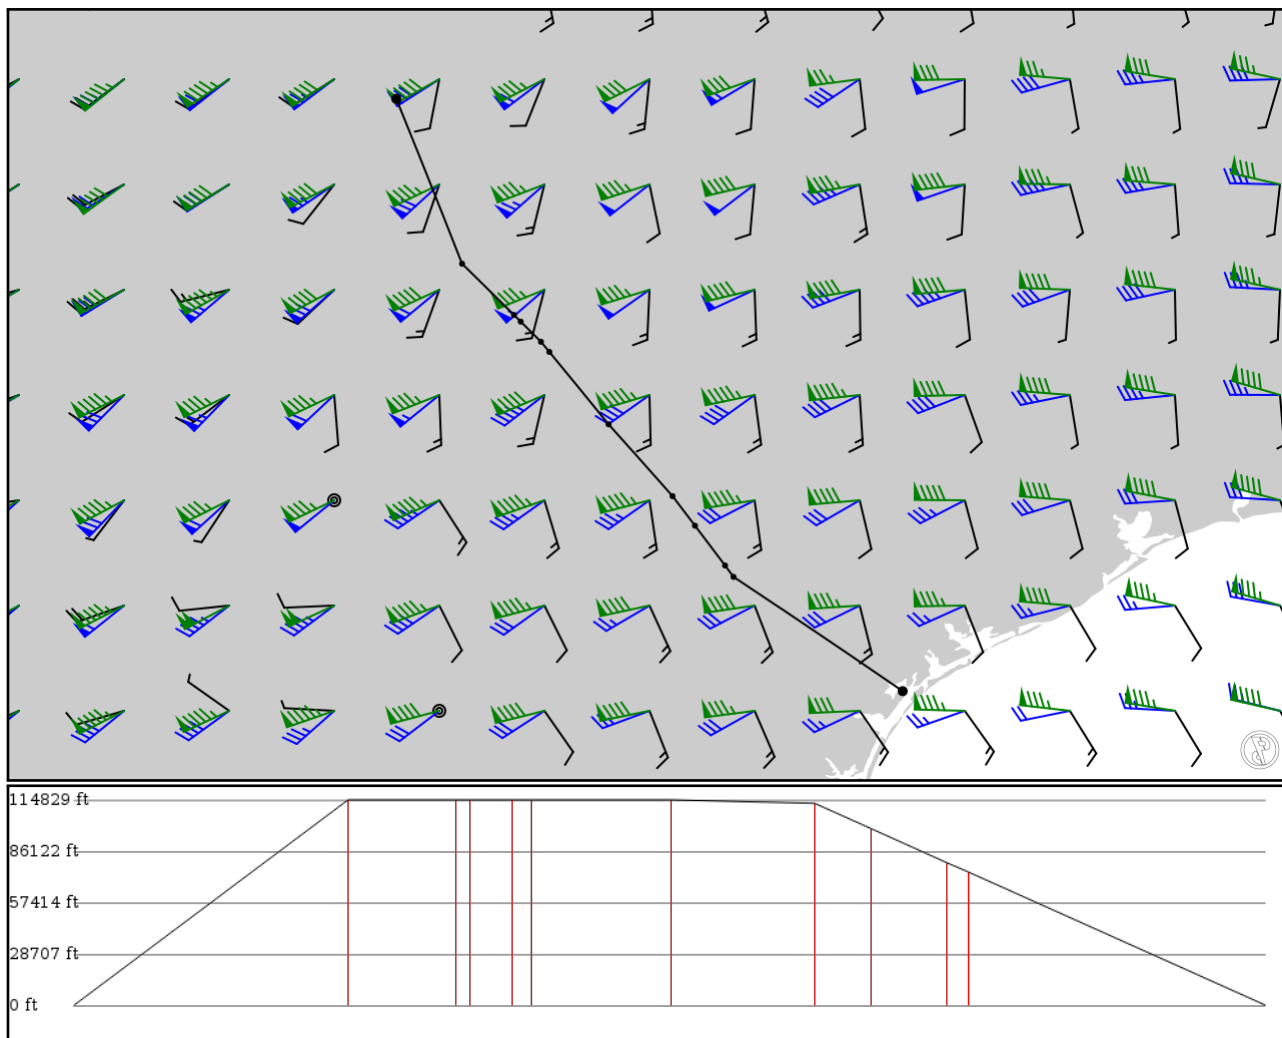

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLBB APT	-	33.66160 -101.81900	0 ft 0 m	-	LUBBOCK PRESTON SMITH INTL
HYMAN FIX	-	32.10950 -101.19900	35,000 ft 10,668 m	98	-
WATOR FIX	V76 AWY-LO	31.62800 -100.71000	35,000 ft 10,668 m	38	-
JIGEM FIX	V76 AWY-LO	31.56470 -100.64600	35,000 ft 10,668 m	5	-
SJT VOR	V76 AWY-LO	31.37500 -100.45500	35,000 ft 10,668 m	15	SAN ANGELO
EDWAR FIX	V68 AWY-LO	31.27970 -100.37600	35,000 ft 10,668 m	7	-
JCT VOR	V68 AWY-LO	30.59800 -99.81750	35,000 ft 10,668 m	50	JUNCTION
CSI VOR	V68 AWY-LO	29.92240 -99.21450	34,400 ft 10,485 m	51	CENTER POINT (KERRVILLE)
KICED FIX	V161 AWY-LO	29.64390 -99.00270	30,100 ft 9,174 m	20	-
TRAGO FIX	V161 AWY-LO	29.26940 -98.71930	24,300 ft 7,407 m	26	-
SOMER FIX	V161 AWY-LO	29.16240 -98.63960	22,700 ft 6,919 m	7	-
KRKP APT	-	28.08680 -97.04450	0 ft 0 m	106	ARANSAS CO

KLBB

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 3

Elevation: 3,282 ft / 1,000 m
Location: 33.661600 -101.819000
Magnetic Var: 5.471 E

METAR

KLBB 030953Z 09006KT 3SM BR BKN002 OVC015 17/16 A2987 RMK A02 SLP069 T01670161

TAF

TAF KLBB 030555Z 0306/0406 01011KT P6SM BKN015 FM030700 08009KT P6SM BKN009 FM031000 10010KT 4SM BR SCT004 OVC009

Frequencies

TWR - 120.50 MHz - LUBBOCK TOWER
REC - 125.30 MHz - ATIS
DEP - 119.90 MHz - LUBBOCK DEPARTURE
GND - 121.90 MHz - LUBBOCK GROUND
APP - 119.90 MHz - LUBBOCK APPROACH
CLD - 125.80 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
17L	75 ft	2,896 ft	179.64	ASPHALT	0 ft	0 ft
	23 m	883 m	174.17		0 m	0 m
35R	75 ft	2,896 ft	359.64	ASPHALT	0 ft	59 ft
	23 m	883 m	354.17		0 m	18 m
08	151 ft	8,010 ft	89.66	CONCRETE	0 ft	187 ft
	46 m	2,441 m	84.19		0 m	57 m
26	151 ft	8,010 ft	269.67	CONCRETE	0 ft	190 ft
	46 m	2,441 m	264.20		0 m	58 m
17R	151 ft	11,510 ft	179.66	CONCRETE	0 ft	210 ft
	46 m	3,508 m	174.19		0 m	64 m
35L	151 ft	11,510 ft	359.66	CONCRETE	0 ft	210 ft
	46 m	3,508 m	354.19		0 m	64 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
17R	DME	ILBB	109.50 MHz	18 nm	-	-	3,257 ft
				33 km	-		3,257 m
17R	LOC-ILS	ILBB	109.50 MHz	18 nm	179.66	-	3,282 ft
				33 km	174.19		3,282 m
26	LOC-ILS	ILDT	111.90 MHz	18 nm	269.66	-	3,282 ft
				33 km	264.19		3,282 m
17R	GS	ILBB	109.50 MHz	10 nm	179.66	3.00	3,282 ft
				19 km	174.19		3,282 m
26	GS	ILDT	111.90 MHz	10 nm	269.66	3.00	3,282 ft
				19 km	264.19		3,282 m